


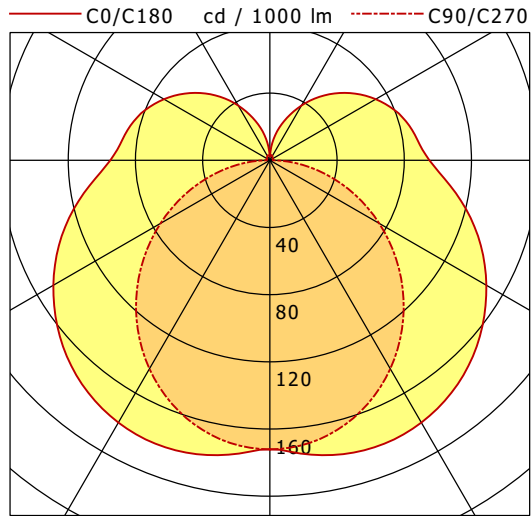

	C0	C90	C180	C270
0°	172	172	172	172
30°	180	143	180	143
60°	149	75	149	75
90°	95	2	95	2
120°	73	2	73	2
150°	38	3	38	3
180°	2	3	2	3
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η Efficiency	LED 119 lm/W
Direct/Indirect System Power	↓ 75% / ↑ 25% 14 W
UGR Reflection factors	X=4H, Y=8H 70/50/20
UGR C0/C180	24.6
UGR C90/C270	21.5
CIE Flux Codes Ra/CRI	35 63 85 75 100 >80