


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES ::

1. DIAMETER DIMENSION SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE ENGLISH.
3. FOR PART NUMBERS AND LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.
4. CABLE MEETS REQUIREMENTS OF EUROCLASS Eca PER EN 50575.
5. CABLE DECLARATION OF PERFORMANCE IS PAN-DOP-FA005.

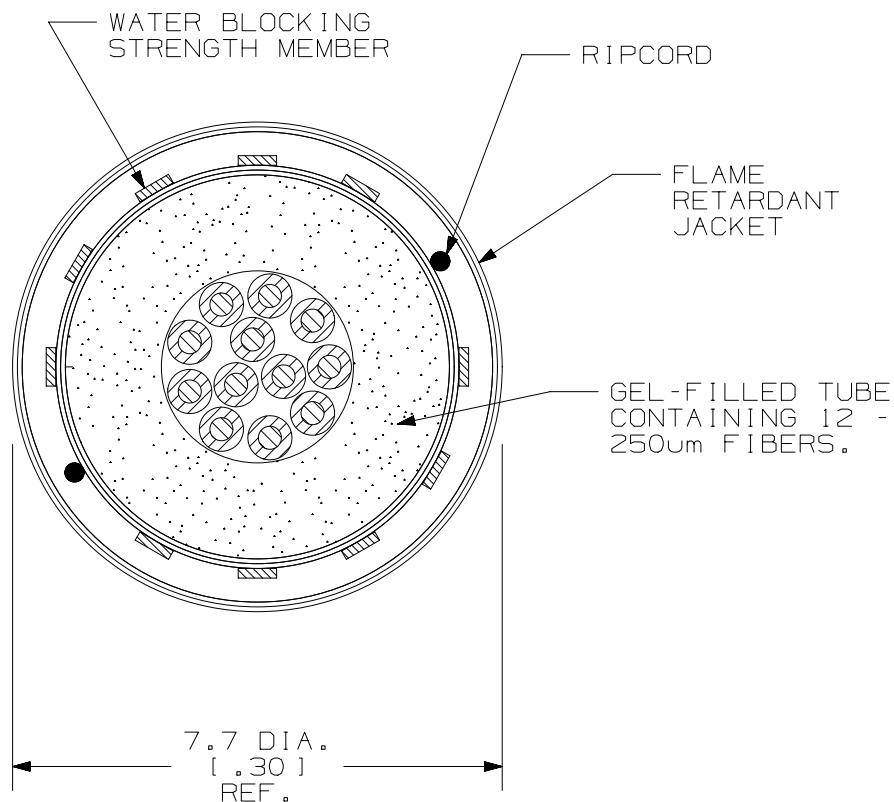

CABLE DESCRIPTION			
FIBER OPTIC INDOOR-OUTDOOR CENTRAL TUBE CABLE			
PART NUMBERS AVAILABLE	FIBER TYPE	JACKET RATING	COLOR
FACC912-40	SINGLEMODE 9/125um	LSZH	BLACK
FACC612-40	MULTIMODE 62.5/125um	LSZH	BLACK
FACC512-40	MULTIMODE 50/125um OM2	LSZH	BLACK
FACCX12-40	MULTIMODE 50/125um OM3	LSZH	BLACK
FACCZ12-40	MULTIMODE 50/125um OM4	LSZH	BLACK

TECHNICAL SPECIFICATIONS		
MAXIMUM LOSS	BEND RADIUS	
3.5 dB/KM @ 850nm 1.5 dB/KM @ 1300nm	INSTALLATION 100 mm (3.9 in)	LONG TERM 60 mm (2.4 in)
SINGLEMODE MAXIMUM LOSS	TENSILE LOAD - LSZH RATED	
.75 dB/KM @ 1310nm .75 dB/KM @ 1500nm	INSTALLATION 1500 N (337.5 lbf)	LONG TERM 700 N (157.5 lbf)
TEMPERATURE		
INSTALLATION	OPERATION	STORAGE
-20°C TO +70°C -4°F TO +158°F	-20°C TO +70°C -4°F TO +158°F	-40°C TO +75°C -40°F TO +167°F

[illegible]