



CSAFL 43.3040.50

CSA 40 Flat (1xLED 36W 840/4000K 3720lm 50 °)

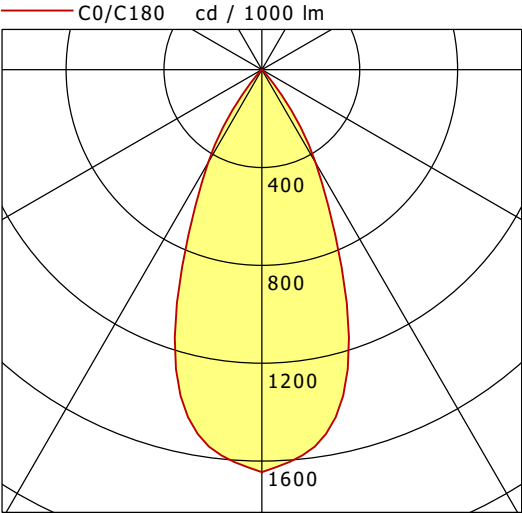

	C0	C90	C180	C270
0°	1645	1645	1645	1645
15°	1327	1327	1327	1327
30°	439	439	439	439
45°	9	9	9	9
60°	3	3	3	3
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

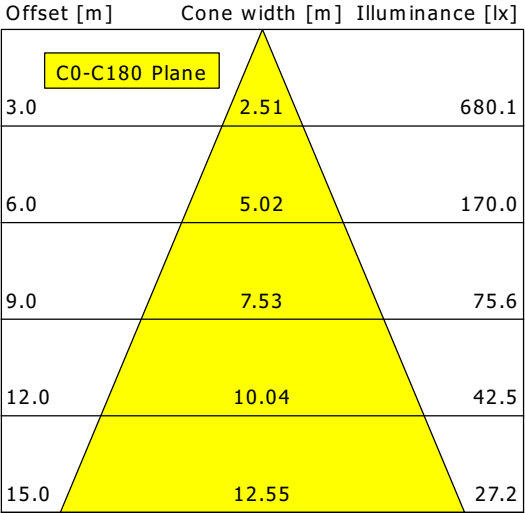

η		LED
Efficiency		103 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		36 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.0
UGR C90/C270		21.0
CIE Flux Codes	98 99 100 100 100	
Ra/CRI		> 80