



CSALP 50.1030.50

CSA 50 (1xLED 14W 830/3000K 1370lm 50 °)

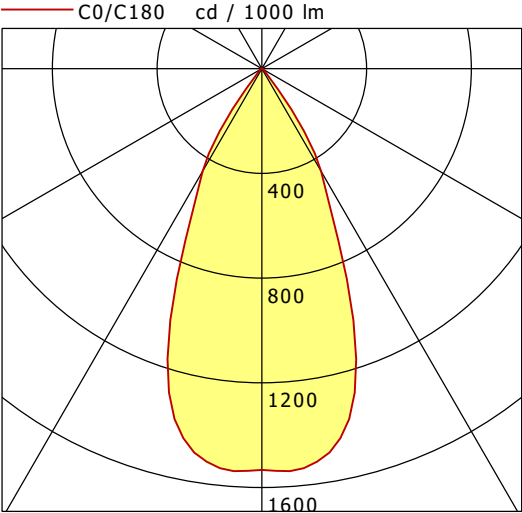

	C0	C90	C180	C270
0°	1533	1533	1533	1533
15°	1337	1337	1337	1337
30°	452	452	452	452
45°	18	18	18	18
60°	7	7	7	7
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

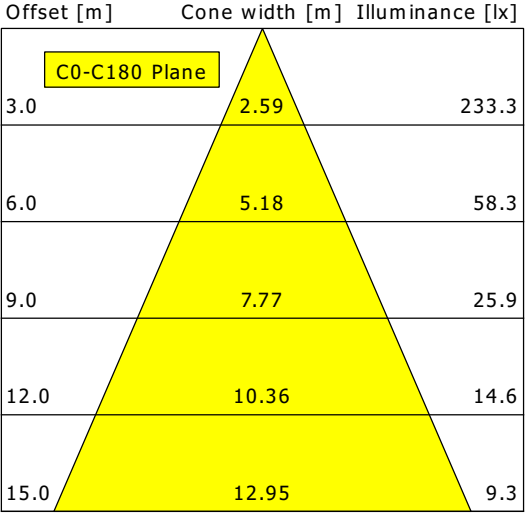

η		LED
Efficiency		98 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		14 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.4
UGR C90/C270		18.4
CIE Flux Codes	97 99 100 100 100	
Ra/CRI		> 80