


PLL 22.1000.840.1/DALI


PL 22 (1xLED 141W 840/4000K 17500lm)

— C0/C180 cd / 1000 lm - - - C90/C270

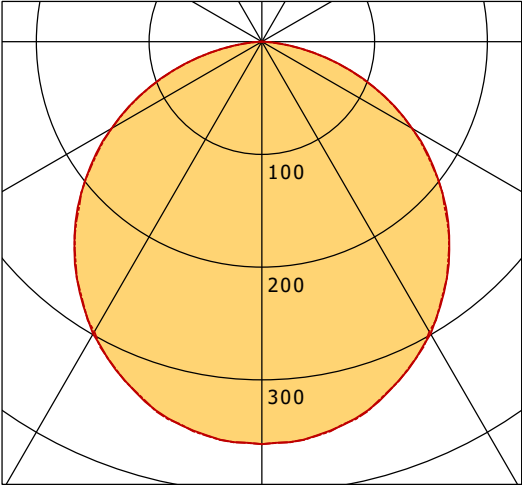

	C0	C90	C180	C270
0°	357	357	357	357
15°	342	343	342	343
30°	299	297	299	297
45°	234	234	234	234
60°	154	154	154	154
75°	65	64	65	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

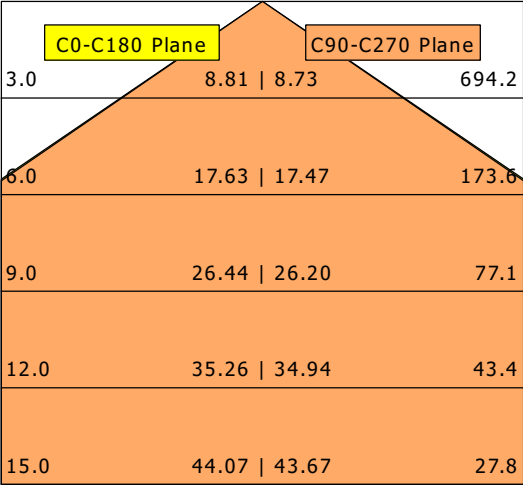

η		LED
Efficiency		124 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		141 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.2
UGR C90/C270		23.2
CIE Flux Codes		48 79 96 100 100
Ra/CRI		> 80