



TPSA 180.3040.11/DALI

Topas | Surface-mounted (1xLED 25W 840/4000K 2930lm)

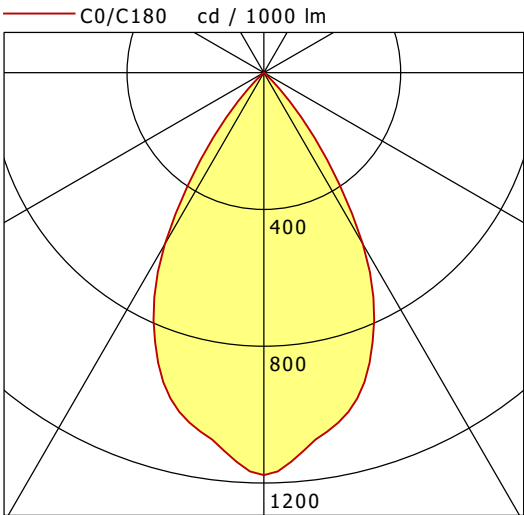

	C0	C90	C180	C270
0°	1177	1177	1177	1177
15°	1008	1008	1008	1008
30°	579	579	579	579
45°	48	48	48	48
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

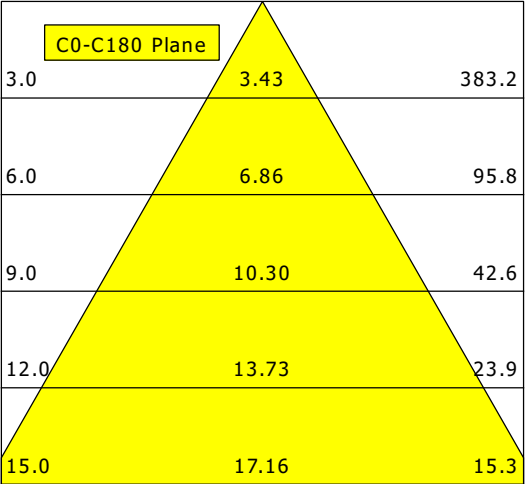

η		LED
Efficiency		117 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		25 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.7
UGR C90/C270		17.7
CIE Flux Codes	97 100 100 100 100	
Ra/CRI		> 80