


# FLIR 200.2040.15

Flix 200 Round (FLIRZ 200.05, 1xLED 27W 840/4000K 3120lm 19°)

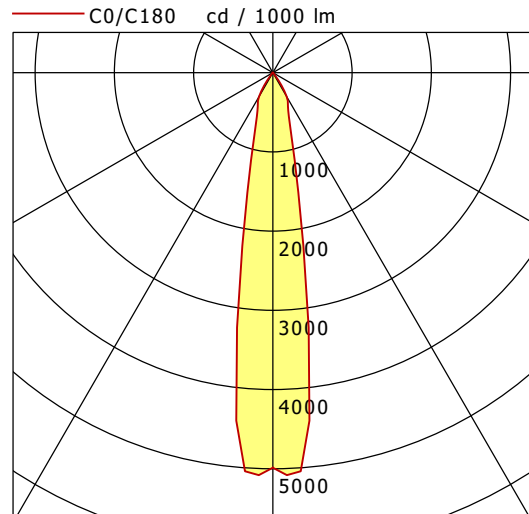

	C0	C90	C180	C270
0°	4987	4987	4987	4987
15°	989	989	989	989
30°	349	349	349	349
45°	15	15	15	15
60°	9	9	9	9
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	0.99	1728.8
6.0	1.98	432.2
9.0	2.97	192.1
12.0	3.97	108.1
15.0	4.96	69.2

<b>η</b>	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.2
UGR C90/C270	19.2
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 80