



FLIR 300.1030.01/DALI

Flix 300 Round (FLIRZ 300.05, 1xLED 11W 830/3000K 1070lm 75 °)

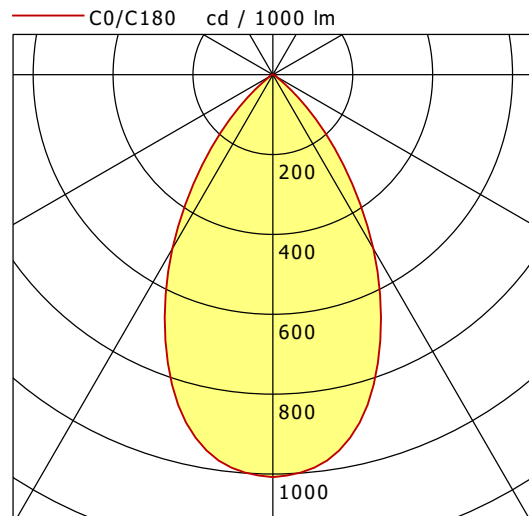

	C0	C90	C180	C270
0°	1008	1008	1008	1008
15°	880	880	880	880
30°	503	503	503	503
45°	136	136	136	136
60°	11	11	11	11
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

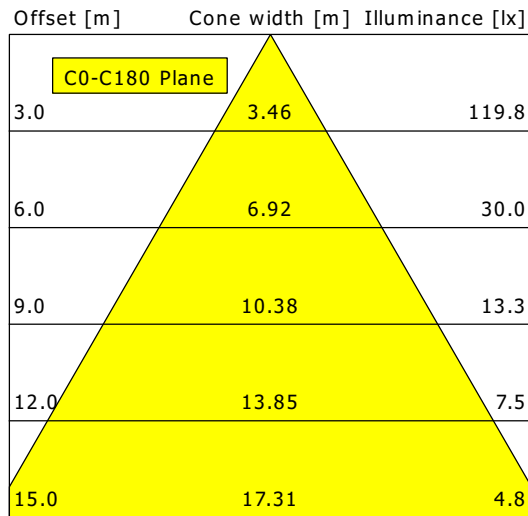

η	LED
Efficiency	97 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	11 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.4
UGR C90/C270	16.4
CIE Flux Codes	88 98 100 100 100
Ra/CRI	>80