

INSTRUCTION



34-2018

RZB
LIGHTING

Lightstream LED

721734.114.1.76

IP 65 IK08 $\approx 220 - 240 \text{ V}$ 0/50/60 Hz

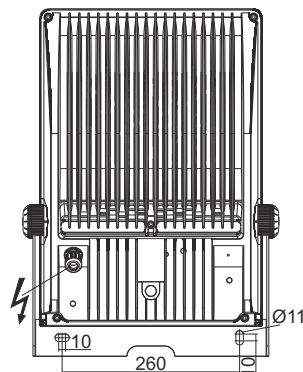

Ta min

721734.114.1.76

L 509, B 374, H 174

11 kg

-25 °C



CCT

CRI

Ta max

LED

2 x 56 W

112 W

13200 lm

4000 K

80

50 °C




A++

A++

60 A


6

10



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464

EN 13201



EN 12464 / EN 13201


Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2



3


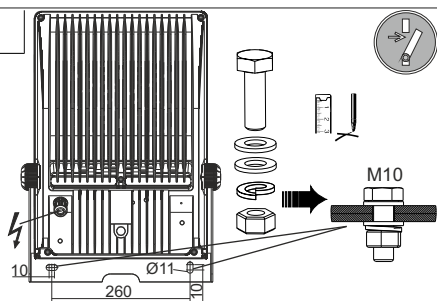


4

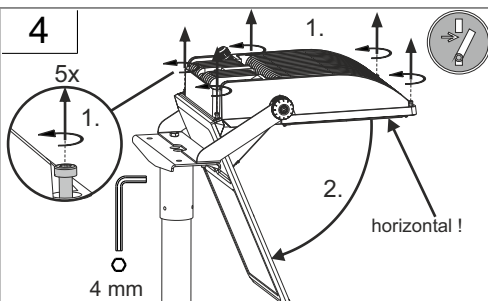


5

2.
(2,5-3 Nm)




5.1

Durchschleifen
loop in-and-out

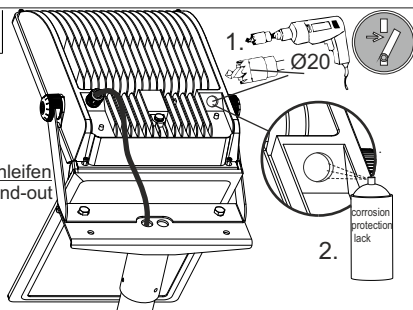



5.2

Durchschleifen
loop in-and-out

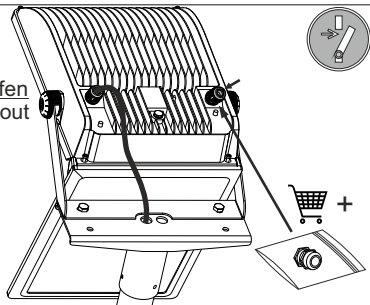


5.3

Durchschleifen
loop in-and-out

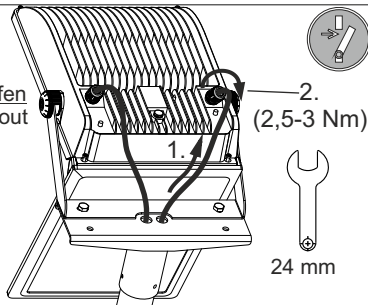




6

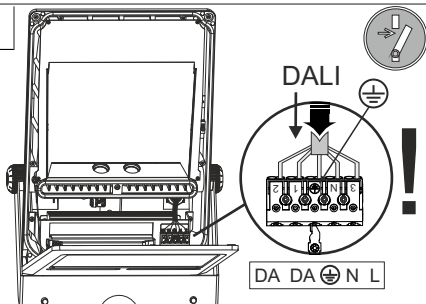


6.1


Durchschleifen / loop in-and-out

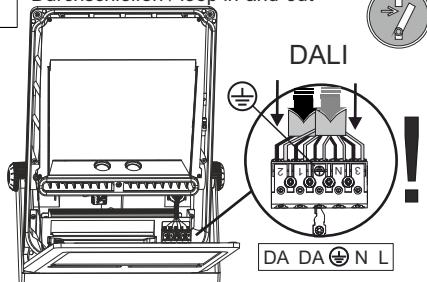


6.2

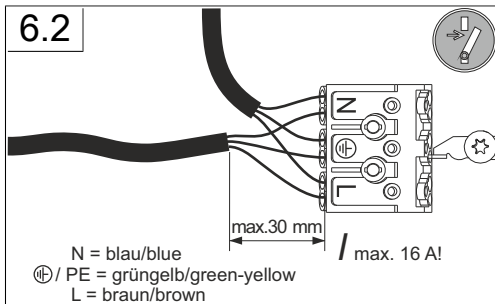


7

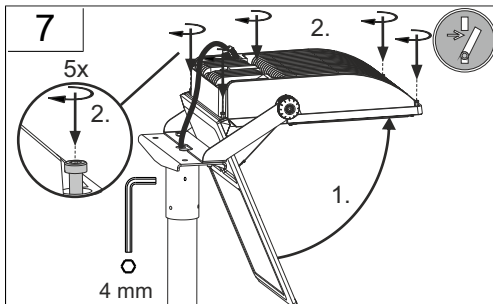

8


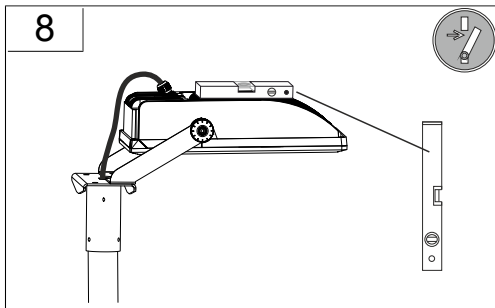


9

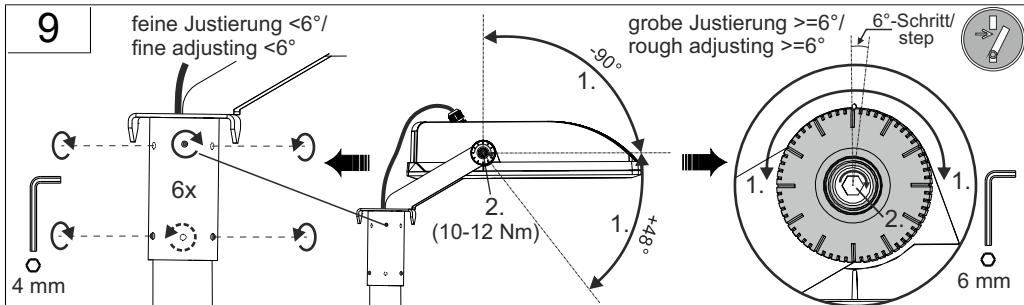




10

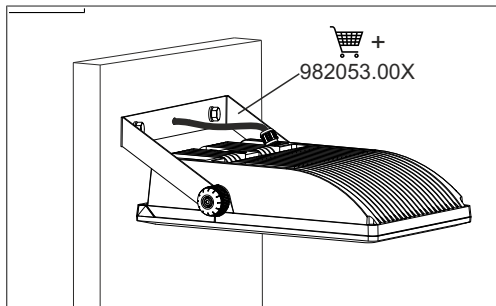




**Hinweis zum Einsatz von Leuchten
mit -Kennzeichnung nach EN 60598-2-24**









IP 4x		Umgebung ohne Staubablagerung
IP 5x		Umgebung mit nicht elektrisch leitender Staubablagerung
IP 6x		Umgebung mit elektrisch leitender Staubablagerung Maximale Umgebungstemperatur beim Einsatz der Leuchte in solcher Umgebung beträgt nur 25° C!


**Reference for application of lumiaires
with - marking according to EN 60598-2-24**

IP 4x		Environment without dust deposit
IP 5x		Environment with non-electrically conductive dust deposit
IP 6x		Environment with electrically conductive dust deposit Maximum ambient temperature when using the luminaire in such an environment is only 25 ° C!





	982053.004	L 346, B 152, H 210,	0,84 kg
	982003.000	L 346, B 112, H 154,	3,6 kg
	982003.004	L 346, B 112, H 154,	3,6 kg
	982004.000	L 346, B 136, H 204,	4,7 kg
	982004.004	L 346, B 136, H 204,	4,7 kg
	982005.000	L 346, B 136, H 204,	5,1 kg
	982005.004	L 346, B 136, H 204,	5,1 kg
	982002.000	L 346, B 97, H 154,	2,9 kg



	982002.004	L 346, B 97, H 154,	2,9 kg
	982045.000	L 346, B 97, H 154,	2,6 kg
	982045.004	L 346, B 97, H 154,	2,6 kg
	982046.000	L 346, B 110, H 204,	3,8 kg
	982046.004	L 346, B 110, H 204,	3,8 kg
	982059.000	L 346, B 112, H 154,	3,3 kg
	982059.004	L 346, B 112, H 154,	3,3 kg
	982401.004	L 525, B 381, H 87,	4,5 kg



 	981984.004	L 465, B 325, H 32,	1,79 kg
	982083.000.1	L 28, B 28, H 1	2,2 g