

INSTRUCTION

41-2017

RZB
LIGHTING

Flat Basic LED

211400.002.191



IP 43, IP 44 IK02



220 - 240 V / 50/60 Hz






3 x 1,5 mm²



2,50

mm²

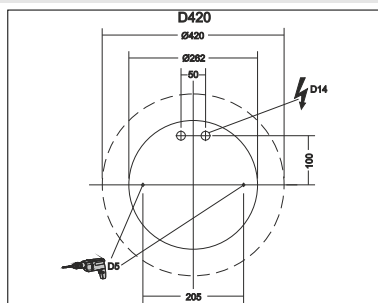

211400.002.191

D 420, H 124

LED

13,5 W

2,92 kg



EEK_{LED}

EEK

CRI

CCT


1200 lm

A+

A+

83

3000K



114

182

114


182

0,15 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1

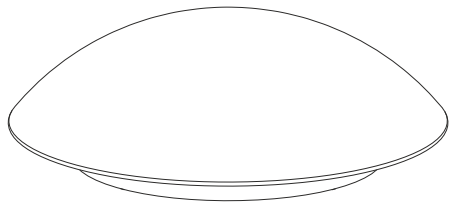



2

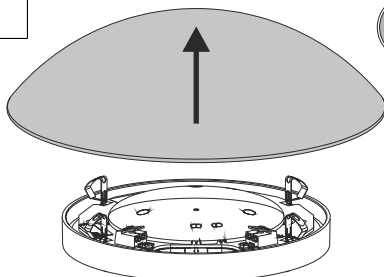


3



4

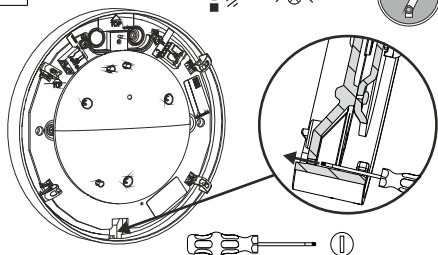


5

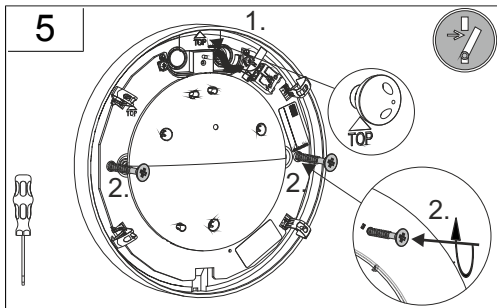

6


Master (out)

Slave

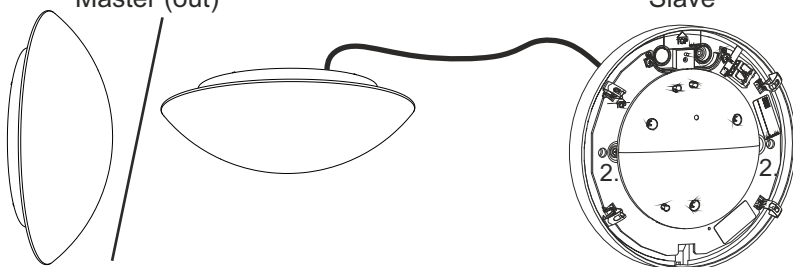




7

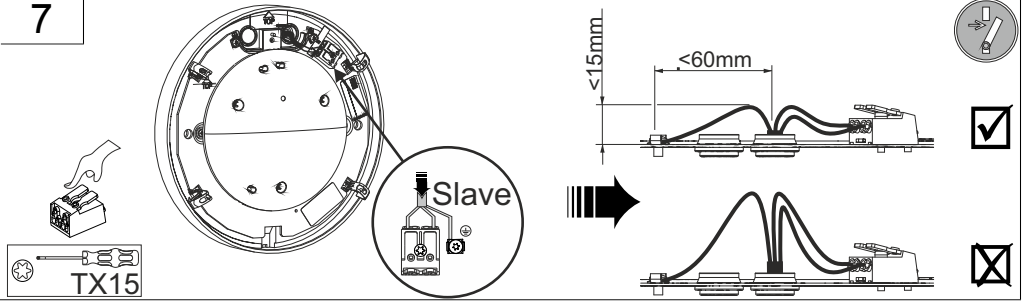


8

Master - Slave - System


radialer Bewegungsmelder/
radial motion sensor

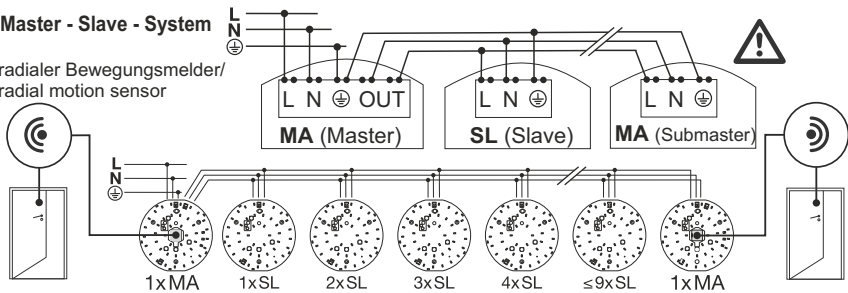


9




09-3003.052



10

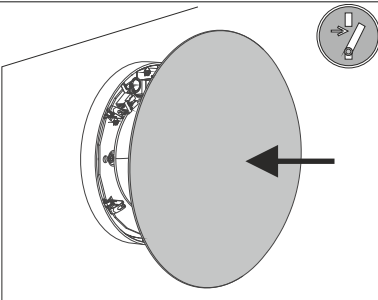

11

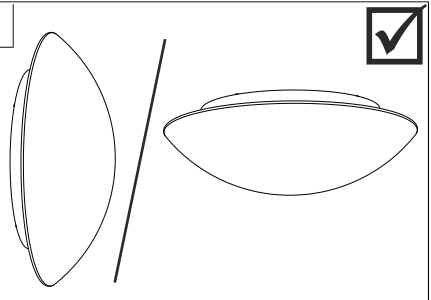




a

DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

b

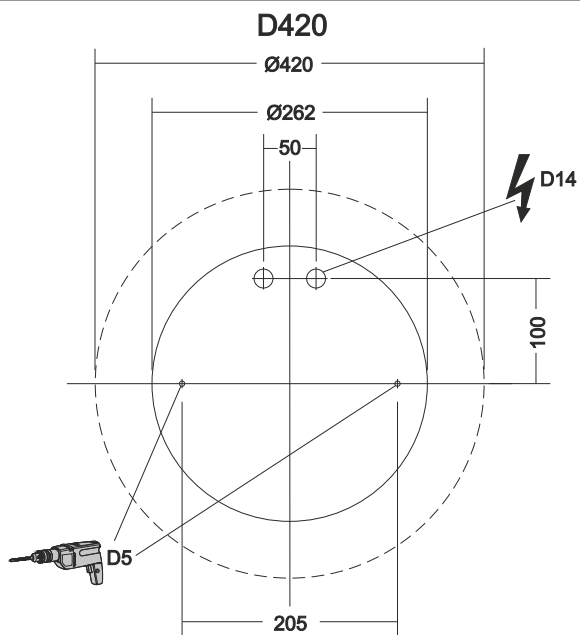

  			
	981100.002	D 440, H 10	0,73 kg
	981100.004	D 440, H 10	0,73 kg
	981100.0042	D 440, H 10	0,73 kg
	981100.005	D 440, H 10	0,73 kg
	981100.0061	D 440, H 10	0,73 kg
	981100.0076	D 440, H 10	0,73 kg
	981100.0078	D 440, H 10	0,73 KG
	981100.007AA	D 440, H 10	0,73 KG
	981100.0082	D 440, H 10	0,73 kg
	981100.009	D 440, H 10	0,73 kg

  			
	05-211011.002	Ersatzglas D 420, H 114	2 kg

Instruction:



41-2017



Instruction:



41-2017



Instruction:



41-2017

