

LL500Z CM L400
LL500Z CM L595

x3 or x6

One cable, one side entry

One cable, two side entry

Two cables, two side entry

Suspension brackets

Pos.	Description
1	LL500Z MB-SW WH LL500Z MB-SW SI LL500Z MB-SW BK Surface mounted bracket white Surface mounted bracket silver Surface mounted bracket black
2	LL500Z MB-SW WH LL500Z MB-SW SI LL500Z MB-SW BK Mounting bracket for suspension wire (2 mm), white Mounting bracket for suspension wire (2 mm), silver Mounting bracket for suspension wire (2 mm), black
3	LL500Z MB-SW2 L5000 WH LL500Z MB-SW2 L5000 SI LL500Z MB-SW2 L5000 BK Mounting bracket with suspension wire l = 5000 mm, white Mounting bracket with suspension wire l = 5000 mm, silver Mounting bracket with suspension wire l = 5000 mm, black
4	LL500Z CB-CH WH LL500Z CB-CH SI LL500Z CB-CH BK Chain bracket, white Chain bracket, silver Chain bracket, black
5	LL500Z PB WH LL500Z PB SI LL500Z PB BK profile bracket for visible T-profiles, white profile bracket for visible T-profiles, silver profile bracket for visible T-profiles, black
6	LL500Z SW2 L1250 LL500Z SW2 L3000 LL500Z SW2 L5000 suspension wire diameter 2 mm, L=1250mm suspension wire diameter 2 mm, L=3000mm suspension wire diameter 2 mm, L=5000mm

PHILIPS

Maxos fusion

LL500T

220V
240V

50Hz
60Hz

LEDs

indoor

IP20

IP54

IK02

Max.
35 °C
Min.
-20 °C

	L(mm)	kg
LL512T	1138	3,6
LL523T	2276	5,4
LL546T	4552	10,8

N

L1

L2

L3

4

5

6

7

8

9

10

11

GREY = 13P

N

L1

L2

L3

4

5

6

7

8

9


10

11

BLUE = 7P

IP20

IP54

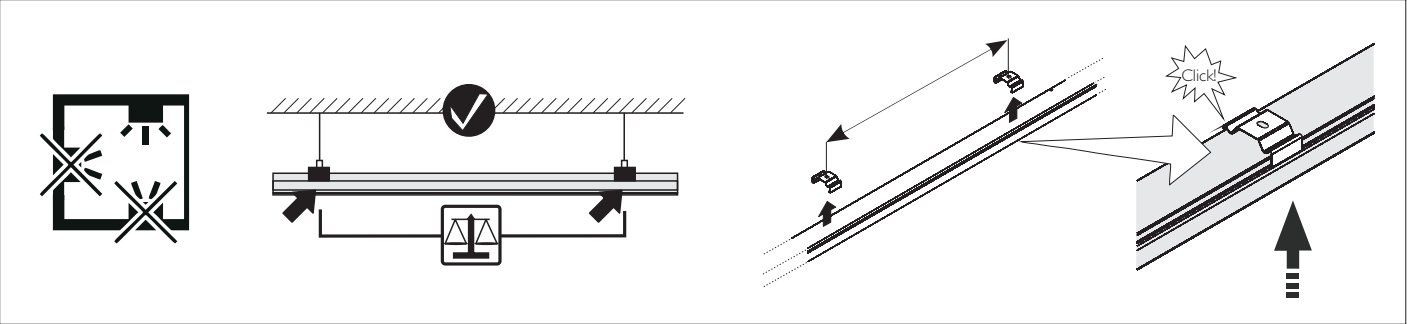

	L(mm)
LL512T	1138
LL523T	2276
LL546T	4552



Suspension distances
D=(0,3m - 0,5m)

Distances for ceiling mounted fixation
D=(0,3m - 0,5m)

Distances for LL500Z PB fixation

1,5 m

LL500Z PB

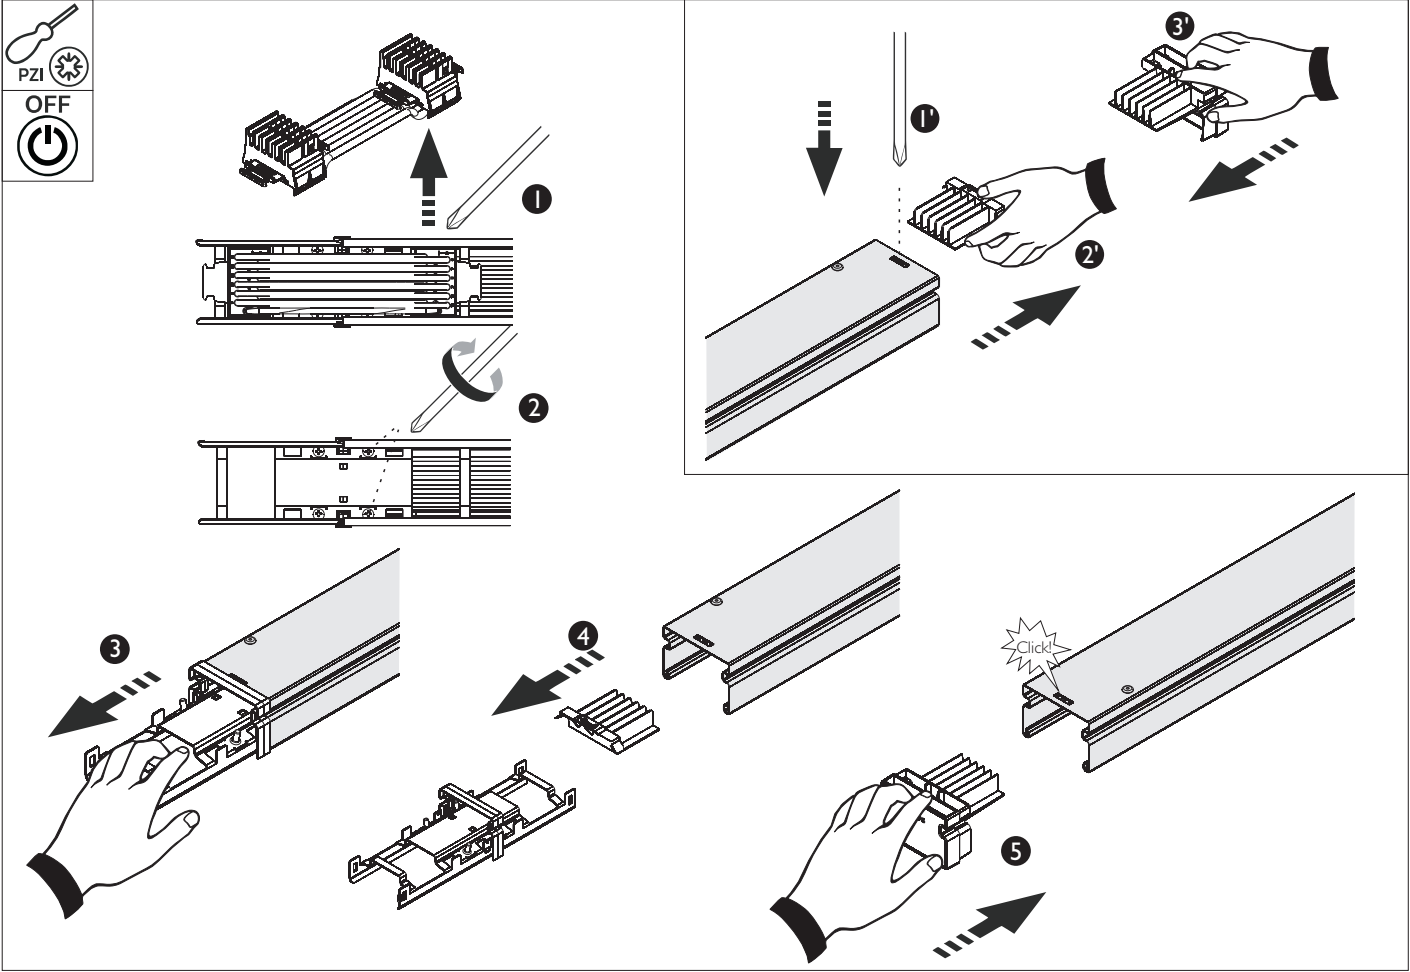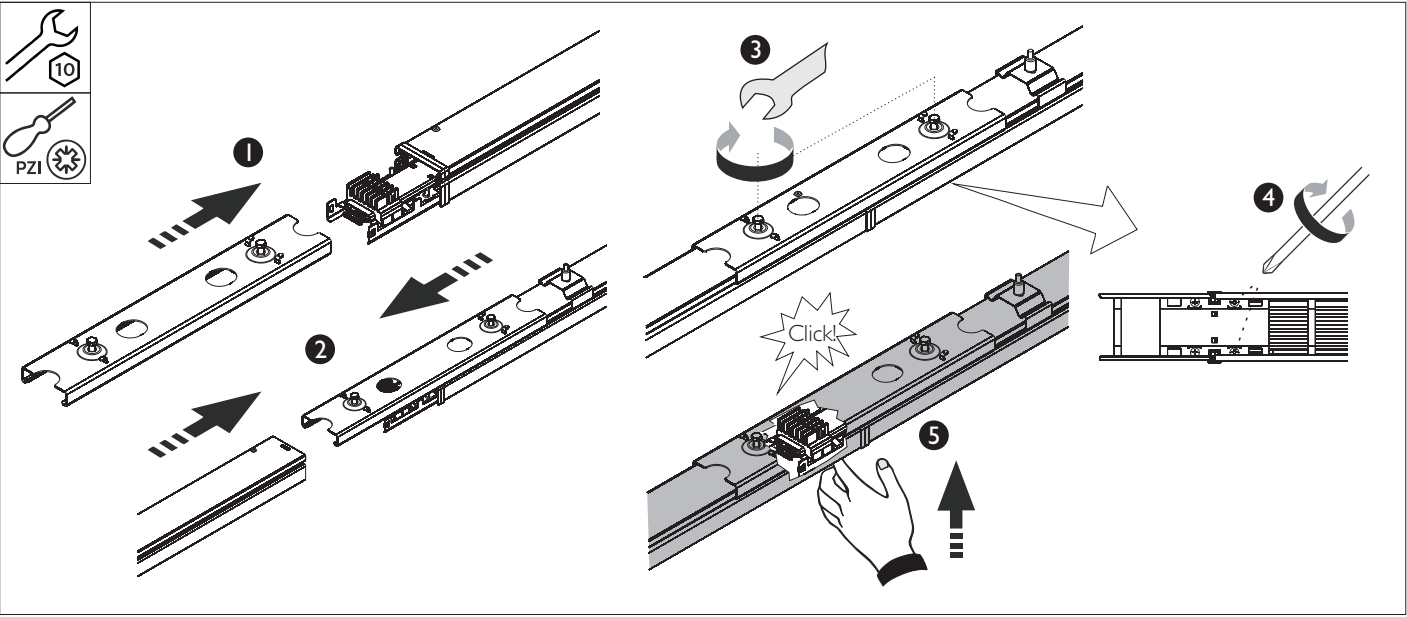

Use:
LL500Z 2xEP CU WH (SI/BK)

11 mm

Ø 10-14 mm