

PRODUCT FAMILY DATASHEET

PARATHOM PAR16 DIM

Dimmable LED reflector lamps PAR16 with retrofit pin base



AREAS OF APPLICATION

- Shops
- Hospitality
- Museums, art galleries
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Spotlighting for accents
- Display cabinets and shop windows
- Spotlighting heat-sensitive objects such as food, plants, etc.
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Very long lifetime of up to 25,000 h
- Low energy consumption
- High color consistency thanks to narrow binning
- Easy replacement of halogen lamps due to compact full glass design and single optic
- Ideal for economical spotlighting

PRODUCT FEATURES

- Professional LED alternative to high voltage halogen lamps
- Good quality of light; color rendering index $R_a \geq 80$
- High color consistency: ≤ 5 SDCM
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Made in Germany (versions up to incl. 50 W)
- Mercury-free lamps



TECHNICAL DATA

Product description	Electrical data				Photometrical data					
	Nominal wattage	Nominal voltage	Claimed equiv. conventional lamp power	Max. lamp no. on circuit break. 10 A (B)	Nominal luminous flux	Rated luminous flux	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature
P PAR 16 50 36° 5.9 W/2700 K GU10 DIM ¹⁾	5.90 W	220...240 V	50 W		350 lm	350 lm	2700 K	0.70	Warm White	2700 K
P PAR 16 50 36° 5.9 W/2700 K GU10 DIM ¹⁾	5.90 W	220...240 V	50 W		350 lm	350 lm	2700 K	0.70	Warm White	2700 K
P PAR 16 50 36° 5.9 W/3000 K GU10 DIM ¹⁾	5.90 W	220...240 V	50 W		350 lm	350 lm	3000 K	0.70	Warm White	3000 K
P PAR 16 50 36° 5.9 W/3000 K GU10 DIM ¹⁾	5.90 W	220...240 V	50 W		350 lm	350 lm	3000 K	0.70	Warm White	3000 K
P PAR 16 50 36° 5.9 W/4000 K GU10 DIM ¹⁾	5.90 W	220...240 V	50 W		350 lm	350 lm	4000 K	0.70	Cool White	4000 K
P PAR 16 50 36° 5.9 W/4000 K GU10 DIM ¹⁾	5.90 W	220...240 V	50 W		350 lm	350 lm	4000 K	0.70	Cool White	4000 K
P PAR 16 80 36° 8 W/2700 K GU10 ¹⁾	8.00 W	220...240 V	80 W	303	575 lm	575 lm	2700 K	0.70	Warm White	2700 K
P PAR 16 80 36° 8 W/3000 K GU10 ¹⁾	8.00 W	220...240 V	80 W	303	575 lm	575 lm	3000 K	0.70	Warm White	3000 K
P PAR 16 80 36° 8 W/4000 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	4000 K	0.70	Cool White	4000 K
P PAR16 DIM 100 36° 9.6 W/2700 K GU10 ¹⁾	9.60 W	220...240 V	100 W		750 lm	750 lm	2700 K	0.70	Warm White	2700 K
P PAR16 DIM 100 36° 9.6 W/3000 K GU10 ¹⁾	9.60 W	220...240 V	100 W		750 lm	750 lm	3000 K	0.70	Warm White	3000 K
P PAR16 DIM 100 36° 9.6 W/4000 K GU10 ¹⁾	9.60 W	220...240 V	100 W		750 lm	750 lm	4000 K	0.70	Cool White	4000 K
P PAR16 DIM 80 60° 8 W/2700 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	2700 K	0.70	Warm White	2700 K
P PAR16 DIM 80 60° 8 W/3000 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	3000 K	0.70	Warm White	3000 K
P PAR16 DIM 80 60° 8 W/4000 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	4000 K	0.70	Cool White	4000 K
P PAR16 DIM 80 120° 8 W/2700 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	2700 K	0.70	Warm White	2700 K
P PAR16 DIM 80 120° 8 W/3000 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	3000 K	0.70	Warm White	3000 K

Product description	Electrical data				Photometrical data					
	Nominal wattage	Nominal voltage	Claimed equiv. conventional lamp power	Max. lamp no. on circuit break. 10 A (B)	Nominal luminous flux	Rated luminous flux	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature
P PAR16 DIM 80 120° 8 W/4000 K GU10 ¹⁾	8.00 W	220...240 V	80 W		575 lm	575 lm	4000 K	0.70	Cool White	4000 K





Product description	Light technical data				Dimensions & weight		Temperatures & operating conditions	Lifespan	
	Luminous flux	Color rendering index Ra	Beam angle	Warm-up time (60 %)	Overall length	Diameter	Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles
P PAR 16 50 36° 5.9 W/2700 K GU10 DIM ¹⁾	350 lm	≥90	36 °	< 0.50 s	55.0 mm	51.0 mm	80 °C	15000 h	100000
P PAR 16 50 36° 5.9 W/2700 K GU10 DIM ¹⁾	350 lm	≥90	36 °	< 0.50 s	55.0 mm	51.0 mm	80 °C	25000 h	100000
P PAR 16 50 36° 5.9 W/3000 K GU10 DIM ¹⁾	350 lm	≥90	36 °	< 0.50 s	55.0 mm	51.0 mm	80 °C	15000 h	100000
P PAR 16 50 36° 5.9 W/3000 K GU10 DIM ¹⁾	350 lm	≥90	36 °	< 0.50 s	55.0 mm	51.0 mm	80 °C	25000 h	100000
P PAR 16 50 36° 5.9 W/4000 K GU10 DIM ¹⁾	350 lm	≥90	36 °	< 0.50 s	55.0 mm	51.0 mm	80 °C	15000 h	100000
P PAR 16 50 36° 5.9 W/4000 K GU10 DIM ¹⁾	350 lm	≥90	36 °	< 0.50 s	55.0 mm	51.0 mm	80 °C	25000 h	100000
P PAR 16 80 36° 8 W/2700 K GU10 ¹⁾	575 lm	≥80	36 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR 16 80 36° 8 W/3000 K GU10 ¹⁾	575 lm	≥80	36 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR 16 80 36° 8 W/4000 K GU10 ¹⁾	575 lm	≥80	36 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR16 DIM 100 36° 9.6 W/2700 K GU10 ¹⁾	750 lm	≥80	36 °	< 0.50 s	62.0 mm	51.0 mm	118 °C	25000 h	100000
P PAR16 DIM 100 36° 9.6 W/3000 K GU10 ¹⁾	750 lm	≥80	36 °	< 0.50 s	62.0 mm	51.0 mm	118 °C	25000 h	100000
P PAR16 DIM 100 36° 9.6 W/4000 K GU10 ¹⁾	750 lm	≥80	36 °	< 0.50 s	62.0 mm	51.0 mm	118 °C	25000 h	100000

Product description	Luminous flux	Color rendering index Ra	Light technical data		Dimensions & weight		Temperatures & operating conditions	Lifespan	
			Beam angle	Warm-up time (60 %)	Overall length	Diameter	Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles
P PAR16 DIM 80 60° 8 W/2700 K GU10 ¹⁾	575 lm	≥80	60 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR16 DIM 80 60° 8 W/3000 K GU10 ¹⁾	575 lm	≥80	60 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR16 DIM 80 60° 8 W/4000 K GU10 ¹⁾	575 lm	≥80	60 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR16 DIM 80 120° 8 W/2700 K GU10 ¹⁾	575 lm	≥80	120 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR16 DIM 80 120° 8 W/3000 K GU10 ¹⁾	575 lm	≥80	120 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000
P PAR16 DIM 80 120° 8 W/4000 K GU10 ¹⁾	575 lm	≥80	120 °	< 0.50 s	55.0 mm	51.0 mm	95 °C	25000 h	100000

Product description	Additional product data			Capabilities	Certificates & standards	
	Base (standard designation)	Mercury content	Mercury-free	Dimmable	Energy efficiency class	Energy consumption
P PAR 16 50 36° 5.9 W/2700 K GU10 DIM ¹⁾	GU10	0.0 mg	Yes	Yes	A+	6 kWh/1000h
P PAR 16 50 36° 5.9 W/2700 K GU10 DIM ¹⁾	GU10	0.0 mg	Yes	Yes	A+	6 kWh/1000h
P PAR 16 50 36° 5.9 W/3000 K GU10 DIM ¹⁾	GU10	0.0 mg	Yes	Yes	A+	6 kWh/1000h
P PAR 16 50 36° 5.9 W/3000 K GU10 DIM ¹⁾	GU10	0.0 mg	Yes	Yes	A+	6 kWh/1000h
P PAR 16 50 36° 5.9 W/4000 K GU10 DIM ¹⁾	GU10	0.0 mg	Yes	Yes	A+	6 kWh/1000h
P PAR 16 50 36° 5.9 W/4000 K GU10 DIM ¹⁾	GU10	0.0 mg	Yes	Yes	A+	6 kWh/1000h
P PAR 16 80 36° 8 W/2700 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR 16 80 36° 8 W/3000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h

Product description	Additional product data			Capabilities	Certificates & standards	
	Base (standard designation)	Mercury content	Mercury-free	Dimmable	Energy efficiency class	Energy consumption
P PAR 16 80 36° 8 W/4000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR16 DIM 100 36° 9.6 W/2700 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	10 kWh/1000h
P PAR16 DIM 100 36° 9.6 W/3000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	10 kWh/1000h
P PAR16 DIM 100 36° 9.6 W/4000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	10 kWh/1000h
P PAR16 DIM 80 60° 8 W/2700 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR16 DIM 80 60° 8 W/3000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR16 DIM 80 60° 8 W/4000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR16 DIM 80 120° 8 W/2700 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR16 DIM 80 120° 8 W/3000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h
P PAR16 DIM 80 120° 8 W/4000 K GU10 ¹⁾	GU10	0.0 mg	Yes	Yes	A+	8 kWh/1000h

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

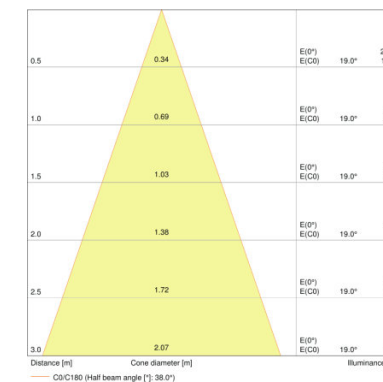
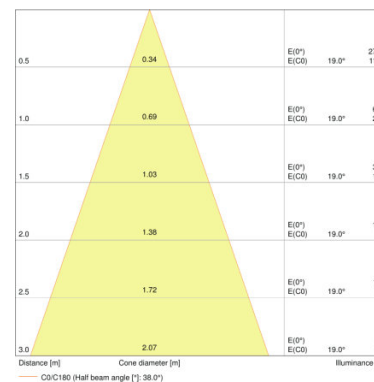
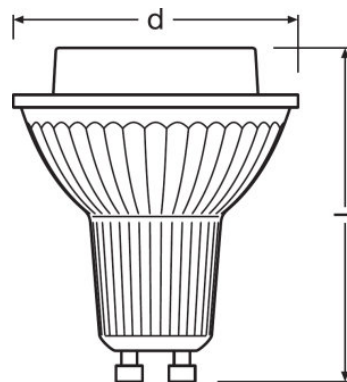
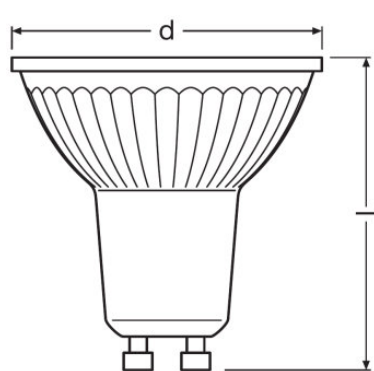


P PAR 16 50 36° 5.9 W/2700 K GU10 DIM, P PAR 16 50 36° 5.9 W/2700 K GU10 DIM, P PAR 16 50 36° 5.9 W/3000 K GU10 DIM, P PAR 16 50 36° 5.9 W/3000 K GU10 DIM, P PAR 16 50 36° 5.9 W/4000 K GU10 DIM, P PAR 16 50 36° 5.9 W/4000 K GU10 DIM, P PAR 16 80 36° 8 W/2700 K GU10, P PAR 16 80 36° 8 W/3000 K GU10, P PAR 16 80 36° 8 W/4000 K GU10, P PAR16 DIM 80 60° 8 W/2700 K GU10, P PAR16 DIM 80 60° 8 W/3000 K GU10, P PAR16 DIM 80 60° 8 W/4000 K GU10, P PAR16 DIM 80 120° 8 W/2700 K GU10, P PAR16 DIM 80 120° 8 W/3000 K GU10, P PAR16 DIM 80 120° 8 W/4000 K GU10

P PAR16 DIM 100 36° 9.6 W/2700 K GU10, P PAR16 DIM 100 36° 9.6 W/3000 K GU10, P PAR16 DIM 100 36° 9.6 W/4000 K GU10

P PAR 16 50 36° 5.9 W/2700 K GU10 DIM

P PAR 16 50 36° 5.9 W/2700 K GU10 DIM

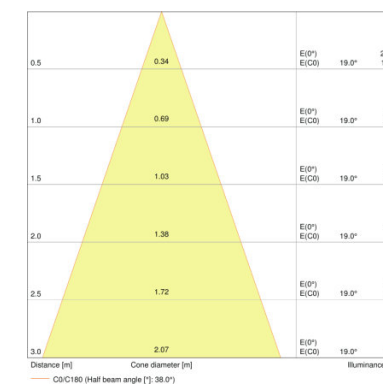
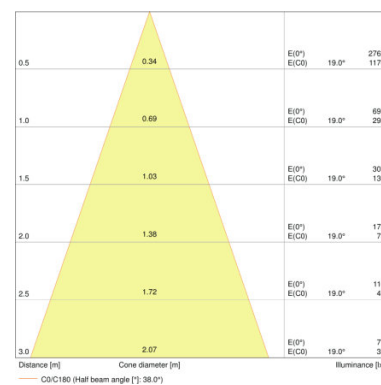
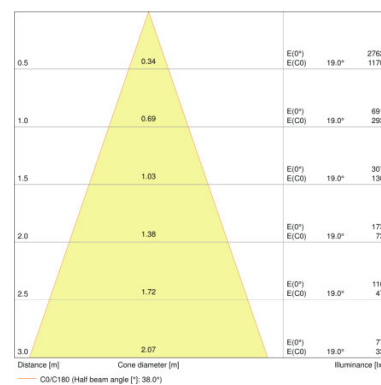
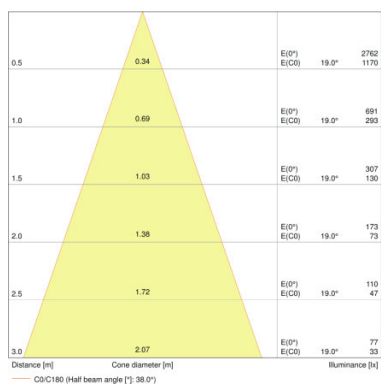


P PAR 16 50 36° 5.9 W/3000 K GU10 DIM

P PAR 16 50 36° 5.9 W/3000 K GU10

P PAR 16 50 36° 5.9 W/4000 K GU10 DIM

P PAR 16 50 36° 5.9 W/4000 K GU10

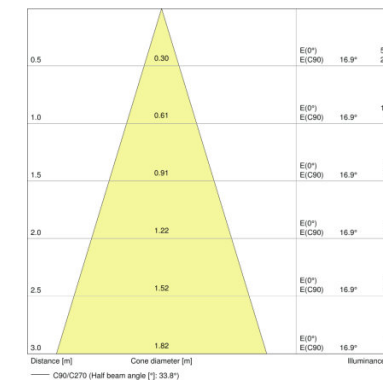
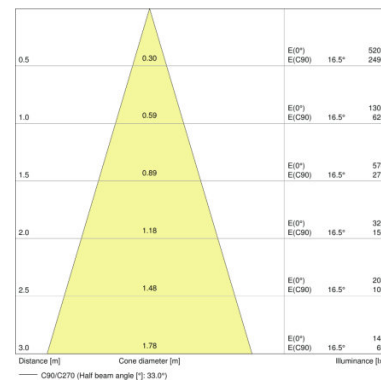
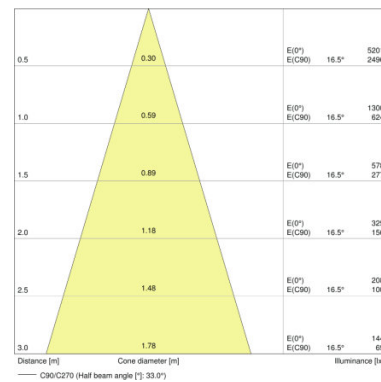
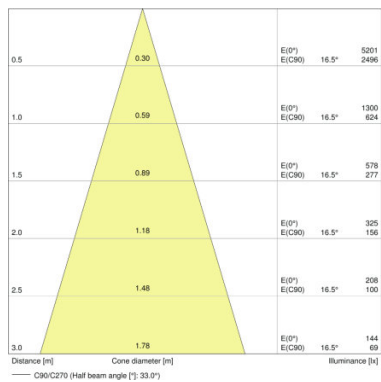


P PAR 16 80 36° 8 W/2700 K GU10

P PAR 16 80 36° 8 W/3000 K GU10

P PAR 16 80 36° 8 W/4000 K GU10

P PAR16 DIM 100 36° 9.6 W/2700 K GU10

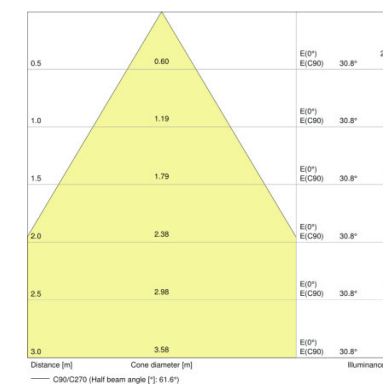
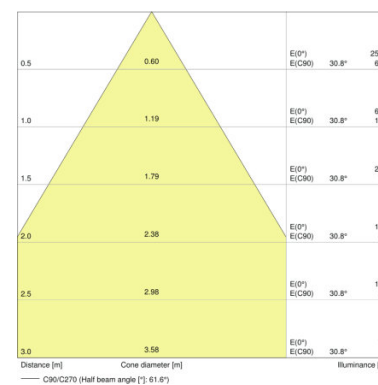
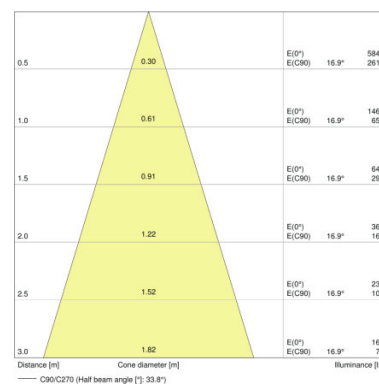
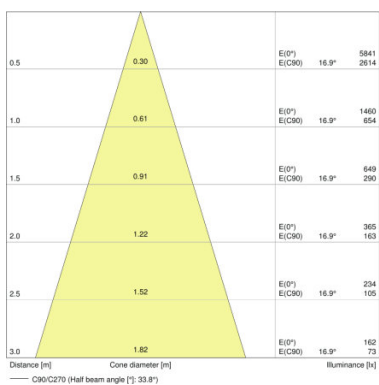


P PAR16 DIM 100 36° 9.6 W/3000 K GU10

P PAR16 DIM 100 36° 9.6 W/4000 K GU10

P PAR16 DIM 80 60° 8 W/2700 K GU10

P PAR16 DIM 80 60° 8 W/3000 K GU10

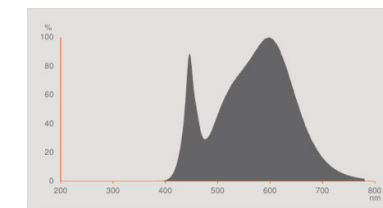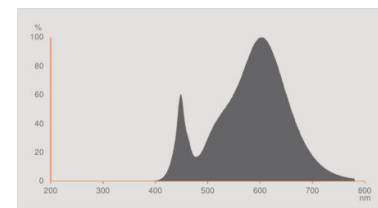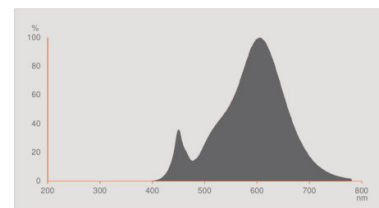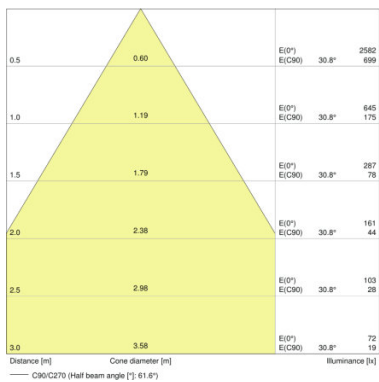

P PAR16 DIM 80 60° 8 W/4000 K GU10

P PAR16 DIM 80 120° 8 W/2700 K GU10

P PAR16 DIM 80 120° 8 W/3000 K GU10

P PAR16 DIM 80 120° 8 W/4000 K GU10

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075095328	P PAR 16 50 36° 5.9 W/2700 K GU10 DIM	Shipping carton box 50	382 mm x 268 mm x 72 mm	7.37 dm ³	2829.00 g
4058075095380	P PAR 16 50 36° 5.9 W/2700 K GU10 DIM	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	598.00 g
4058075095342	P PAR 16 50 36° 5.9 W/3000 K GU10 DIM	Shipping carton box 50	382 mm x 268 mm x 72 mm	7.37 dm ³	2829.00 g
4058075095366	P PAR 16 50 36° 5.9 W/3000 K GU10 DIM	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	598.00 g
4058075095267	P PAR 16 50 36° 5.9 W/4000 K GU10 DIM	Shipping carton box 50	382 mm x 268 mm x 72 mm	7.37 dm ³	2829.00 g
4058075095281	P PAR 16 50 36° 5.9 W/4000 K GU10 DIM	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	598.00 g
4058075095489	P PAR 16 80 36° 8 W/2700 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075095465	P PAR 16 80 36° 8 W/3000 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075095441	P PAR 16 80 36° 8 W/4000 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075096608	P PAR16 DIM 100 36° 9.6 W/2700 K GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	888.00 g
4058075096561	P PAR16 DIM 100 36° 9.6 W/3000 K GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	888.00 g
4058075096547	P PAR16 DIM 100 36° 9.6 W/4000 K GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	888.00 g
4058075095540	P PAR16 DIM 80 60° 8 W/2700 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075095526	P PAR16 DIM 80 60° 8 W/3000 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075095502	P PAR16 DIM 80 60° 8 W/4000 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075095601	P PAR16 DIM 80 120° 8 W/2700 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075095588	P PAR16 DIM 80 120° 8 W/3000 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g
4058075095564	P PAR16 DIM 80 120° 8 W/4000 K GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	690.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For dimming conformity see

- ▶ www.ledvance.com/dim

For further products and actual information concerning LED lamps see

- ▶ www.ledvance.com/ledlamps

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.