

INSTRUCTION

46-2017

RZB
LIGHTING

Industrial Hall


921485.003



IP 65



230 V / 50 Hz



921485.003

D 390, H 199

LED

192 W

202 W

5,88 kg



EEK_{LED}

EEK

CRI

CCT

26900 lm

A+

A+

80

4000K



B10




B16



C10



C16



1

2

2

3

55 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464




EN 12464

EN 13201



EN 12464 / EN 13201

Wartungsplan/ Maintenance schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




+





1





2

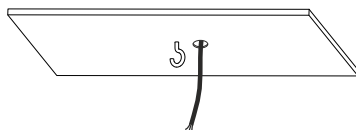


3



4




5

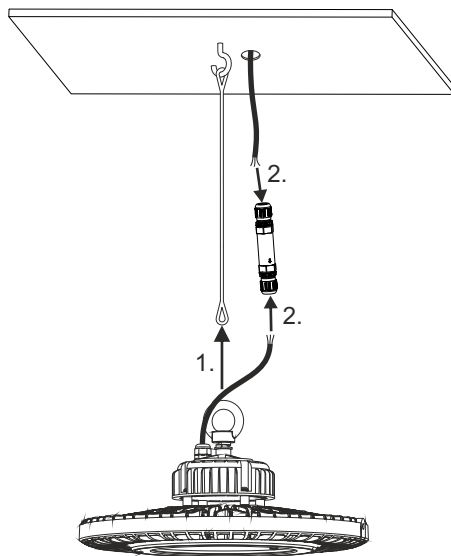





6

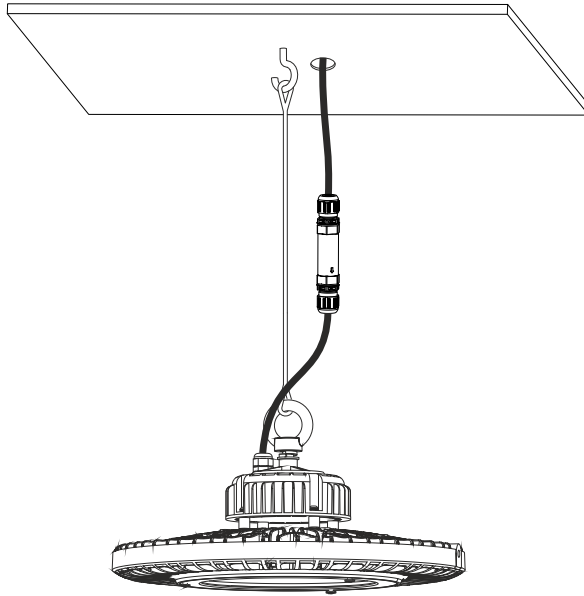


1

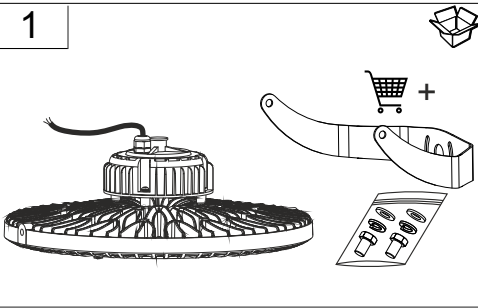


2

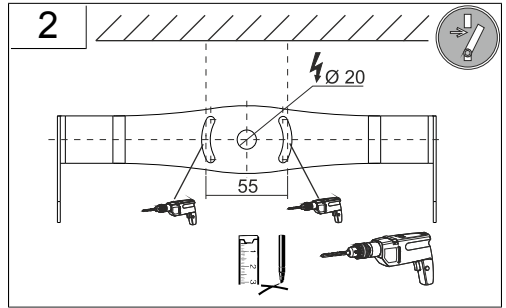

3a



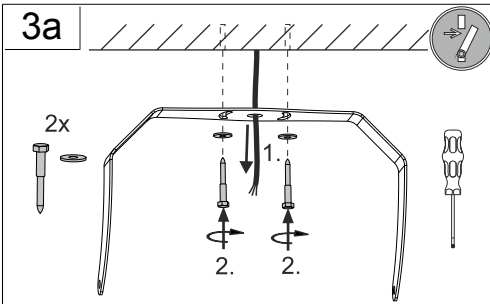



3b

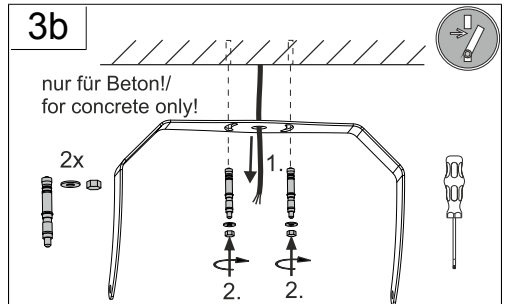



+

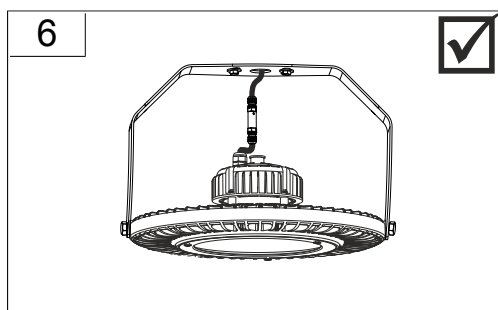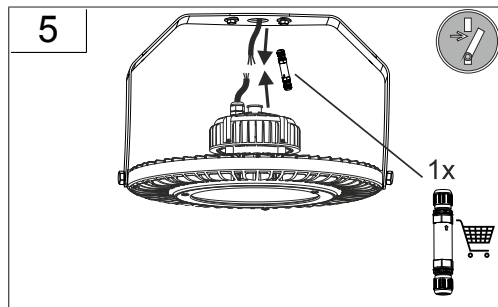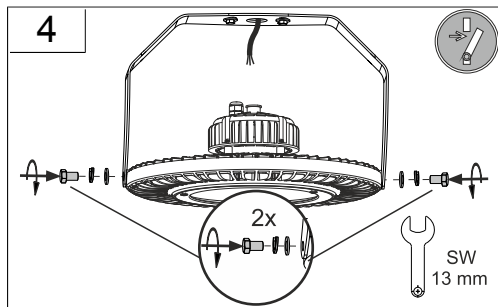



DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

Hinweis zum Einsatz von Leuchten mit -Kennzeichnung nach EN 60598-2-24

IP 4x  Umgebung ohne Staubablagerung

IP 5x  Umgebung mit nicht elektrisch leitender
Staubablagerung

IP 6x  Umgebung mit elektrisch leitender
Staubablagerung

Reference for application of lumiaires with - marking according to EN 60598-2-24

IP 4x  Environment without dust deposit

IP 5x  Environment with not electroconductive
dust deposit

IP 6x  Environment with electroconductive
dust deposit



	982112.003	L 394, B 124, H 232,	1,04 kg
	982114.004	D 327, H 150,	313 g
	982115.000	D 570, H 343,	3,22 kg

Instruction:



46-2017



Instruction:



46-2017

