


INSTRUCTION

Calido
742131.003.1



~ 220 - 240 V 50/60 Hz IP 20

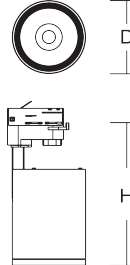

742131.003.1

D 110, H 215

1,23 kg



LED

1 x 34 W

38 W

3750 lm

CCT

CRI

EEK


EEK

4000 K

80

A++

A++



21,2 A / 196 µs

2

3

4

7




DIN EN 61340-5-1










EN 12464
EN 13201



EN 12464



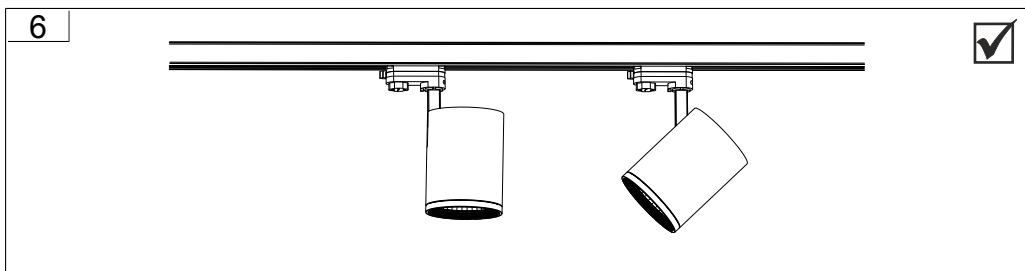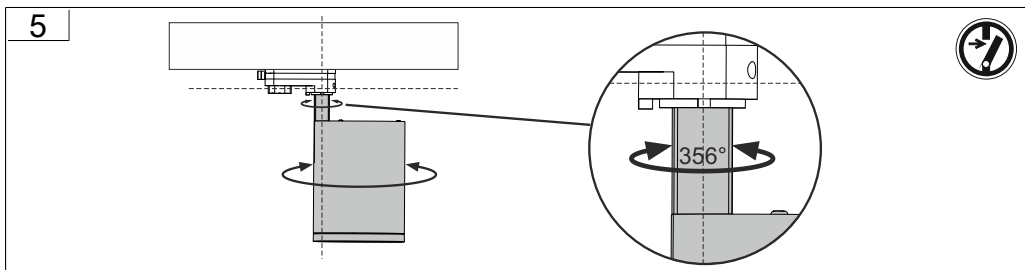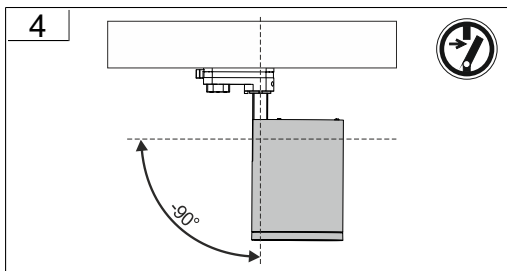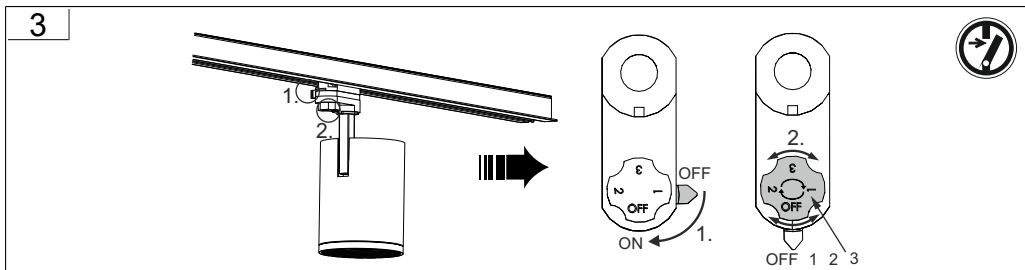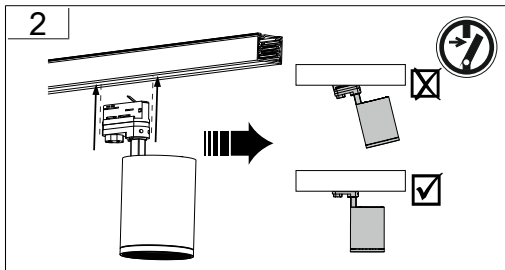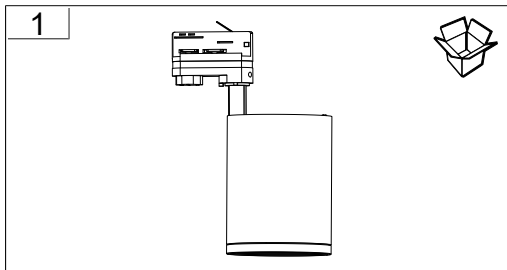



Clickbeam

	I_n	Power factor / Leistungsfaktor
742129.*	58 mA	> 0,9
742130.*	116 mA	> 0,9
742131.*	179 mA	> 0,9
742132.*	237 mA	> 0,9

Only to be installed outside
arms reach. /

Nur zur Installation außerhalb
des Handbereichs vorgesehen.

Die in dieser Leuchte enthaltene Lichtquelle darf nur vom Hersteller oder seinem Kundendienst oder einer ähnlich qualifizierten Person ersetzt werden. /

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



	982405.003	D 90, H 8,	12 g
--	------------	------------	------







RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de