



SCEKLP 10.2030.15

Scene 1 System | Light-Head (1xLED 26W 830/3000K 2740lm)

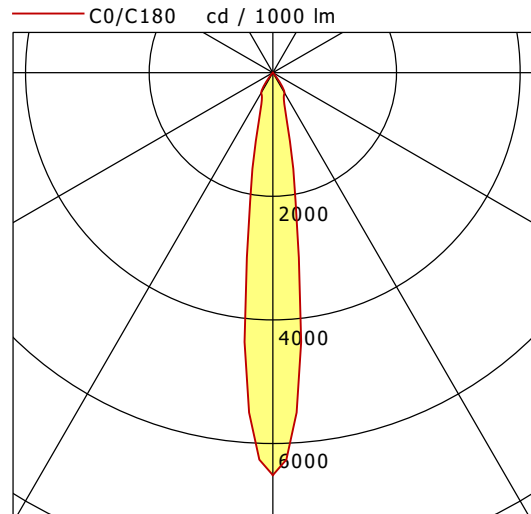

| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 6512 | 6512 | 6512 | 6512 |
| 15° | 967 | 967 | 967 | 967 |
| 30° | 377 | 377 | 377 | 377 |
| 45° | 4 | 4 | 4 | 4 |
| 60° | 3 | 3 | 3 | 3 |
| 75° | 2 | 2 | 2 | 2 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

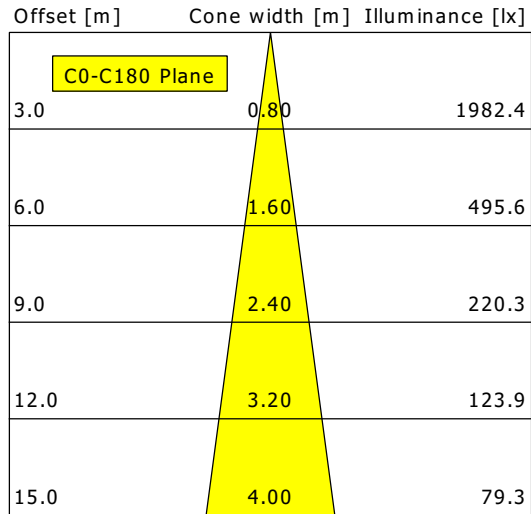

| | |
|--------------------|--------------------|
| η | LED |
| Efficiency | 106 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 26 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 18.8 |
| UGR C90/C270 | 18.8 |
| CIE Flux Codes | 99 100 100 100 100 |
| Ra/CRI | > 80 |