


JAMIE 301.930.15.2/DALI-ST

Jamie 300 (1xLED 16W 930/3000K 1380lm 15 °)

— C0/C180 cd / 1000 lm

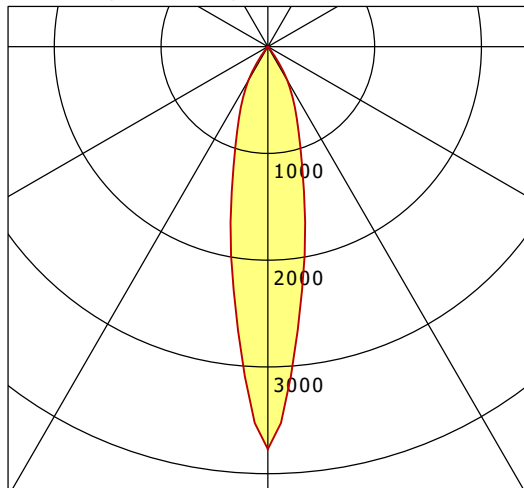

	C0	C90	C180	C270
0°	3770	3770	3770	3770
15°	1275	1275	1275	1275
30°	366	366	366	366
45°	14	14	14	14
60°	12	12	12	12
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.13	578.1
6.0	2.26	144.5
9.0	3.39	64.2
12.0	4.52	36.1
15.0	5.65	23.1

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.5
UGR C90/C270	17.5
CIE Flux Codes	96 99 100 100 100
Ra/CRI	>90