




- Special features**
- Robust housing
 - Flicker-free
 - Secured against short circuits and overloads
 - Overheating protection

Housing Material	Aluminium
Housing Color	Grey
Operating Mode	Constant voltage
Protection Class	Protection class I/protective grounding
Power	40 W
Output Voltage	24 V/DC
Output Current	0-1670 mA
Power Factor	0.95
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Max. units per MCB B10	5
Max. units per MCB B16	9
Max. units per MCB C10	12
Max. units per MCB C16	19
Inrush Current max.	70 A / 500 µs
Capacitive Load	626.3 nF
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 67
Life Time	50000 h
Length	176 mm
Width	58 mm
Height	30.5 mm
Product weight	560 g

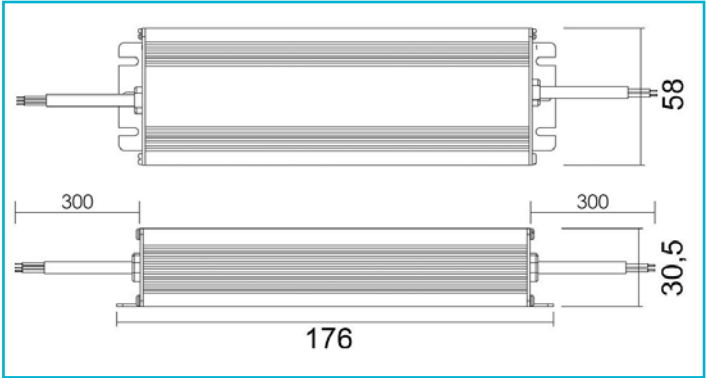