


ML-A 070.0740.14 APB/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 16W 840/4000K 1460lm)

— C0/C180 cd / 1000 lm - - - C90/C270

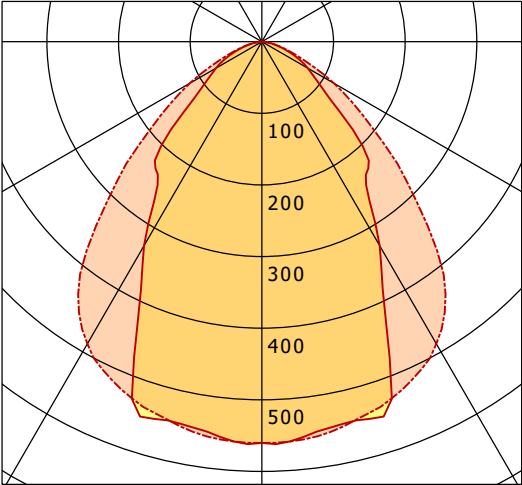

	C0	C90	C180	C270
0°	560	560	560	560
15°	546	542	546	542
30°	329	487	329	487
45°	190	296	190	296
60°	74	116	74	116
75°	24	26	24	26
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

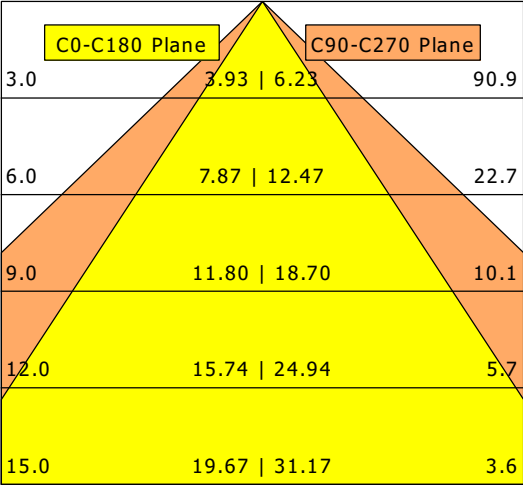

η	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.2
UGR C90/C270	18.4
CIE Flux Codes	66 91 99 100 100
Ra/CRI	> 80