



# VTFL-R 102.840/DALI

Vale-Tu Flat Large | Recessed (1xLED 31W 840/4000K 2990lm)

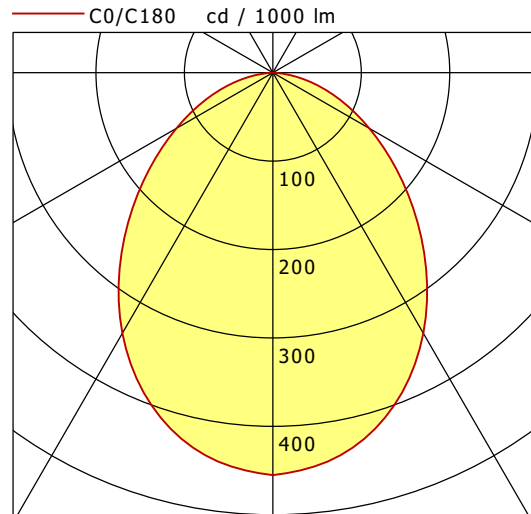

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 455 | 455 | 455  | 455  |
| 15°          | 423 | 423 | 423  | 423  |
| 30°          | 340 | 340 | 340  | 340  |
| 45°          | 228 | 228 | 228  | 228  |
| 60°          | 126 | 126 | 126  | 126  |
| 75°          | 49  | 49  | 49   | 49   |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

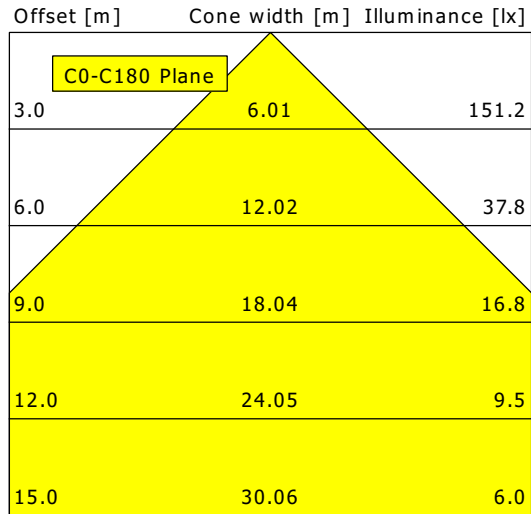

|                    |                  |
|--------------------|------------------|
| <b>η</b>           | LED              |
| Efficiency         | 96 lm/W          |
| Direct/Indirect    | ↓ 100% / ↑ 0%    |
| System Power       | 31 W             |
| <b>UGR</b>         | X=4H, Y=8H       |
| Reflection factors | 70/50/20         |
| UGR C0/C180        | 27.3             |
| UGR C90/C270       | 27.3             |
| CIE Flux Codes     | 55 84 97 100 100 |
| Ra/CRI             | >80              |