




- Special features**
- Ideal for concealed mounting in ceiling coves
 - Flicker-free
 - Secured against short circuits and overloads
 - Overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	50 W
Output Voltage	24 V/DC
Output Current	0-2100 mA
Power Factor	0.95
Connection Type	Clamp
Number of Circuit Breaker B10A max.	5
Number of Circuit Breaker B16A max.	9
Number of Circuit Breaker C10A max.	12
Number of Circuit Breaker C16A max.	19
Inrush Current max.	60 A / 300 µs
Capacitive Load	604.5 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Life Time	30000 h
Length	185 mm
Width	62 mm
Height	22 mm
Product weight	233 g

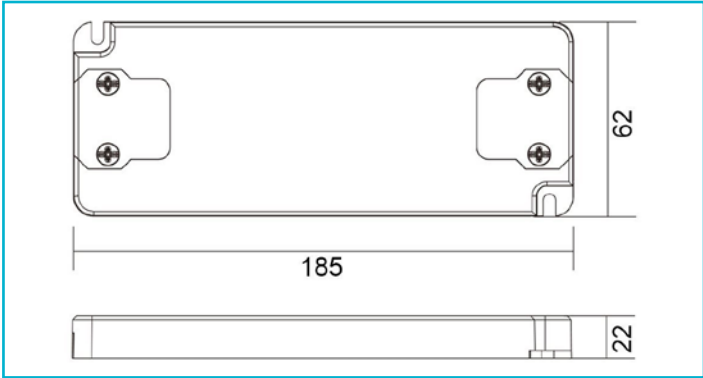