
INSTRUCTION

LINEDO

9503S3.000.400.000

~ 220 - 240 V 50/60 Hz IP 54





[mm]

L 330, B 165, H 120

1,16 kg






DIN EN 61340-5-1




EN 12464
EN 13201

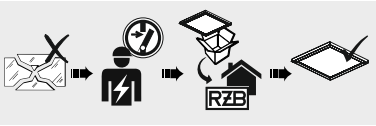


EN 12464
EN 13201



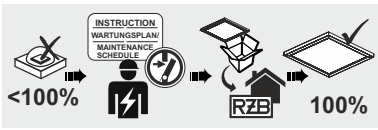


EN 12464




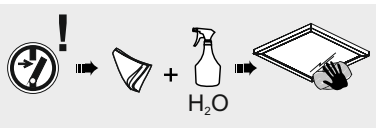

1

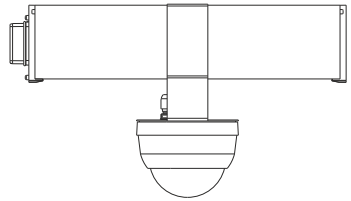



2




Spannungsversorung über
DALI-Anschluss /
Power supply via DALI connection

3






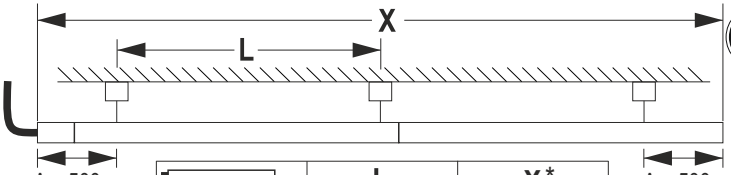


	L	X*
4547 mm	≤ 4500 mm	≤ 60000 mm
2291 mm	≤ 2270 mm	≤ 50000 mm

* R_{PE} < 0,5 Ω
EN 60598


4

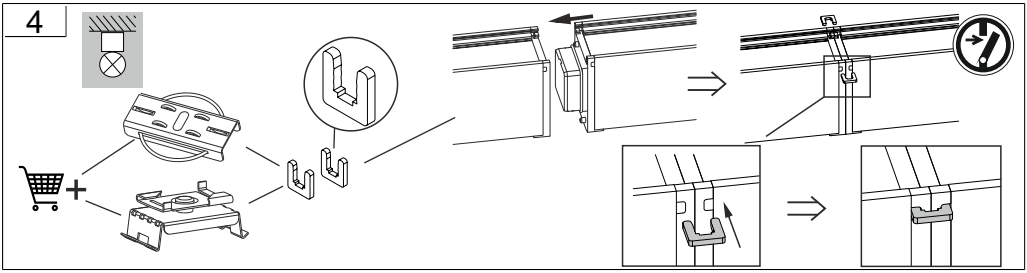


5

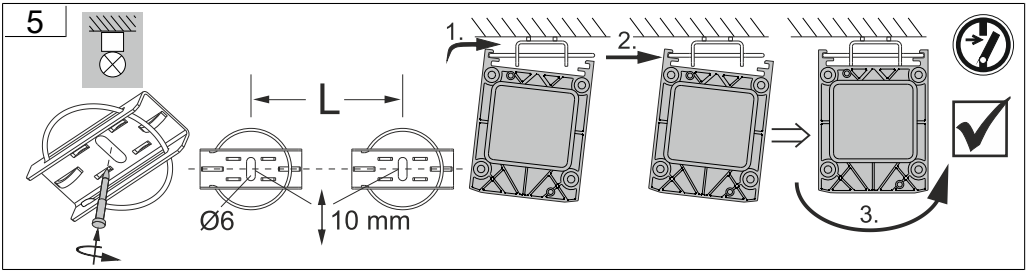


6

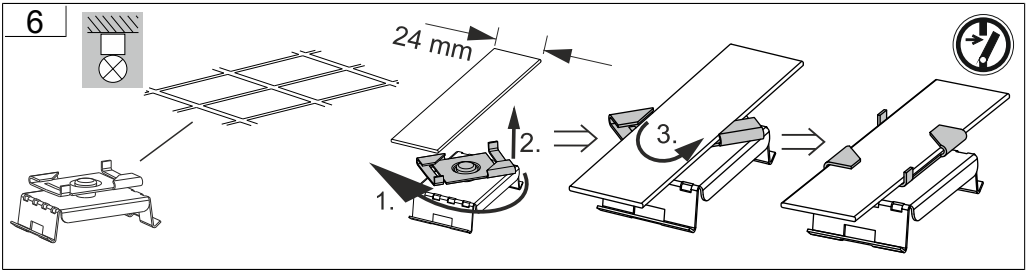


7

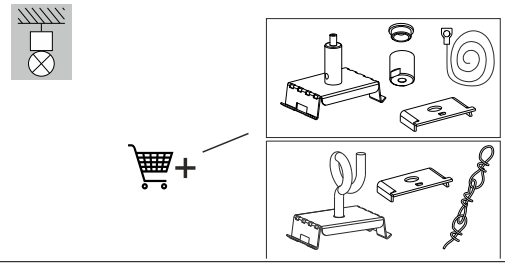


8

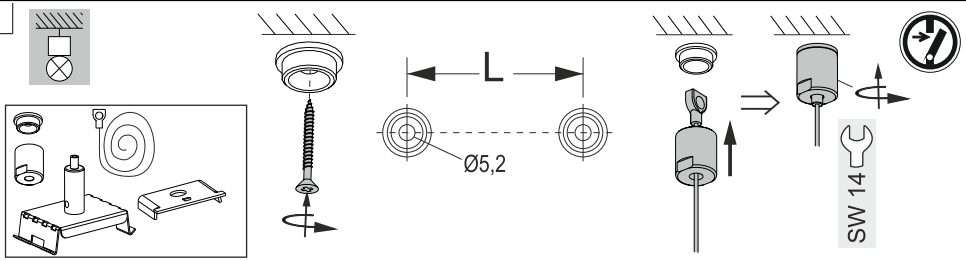


9

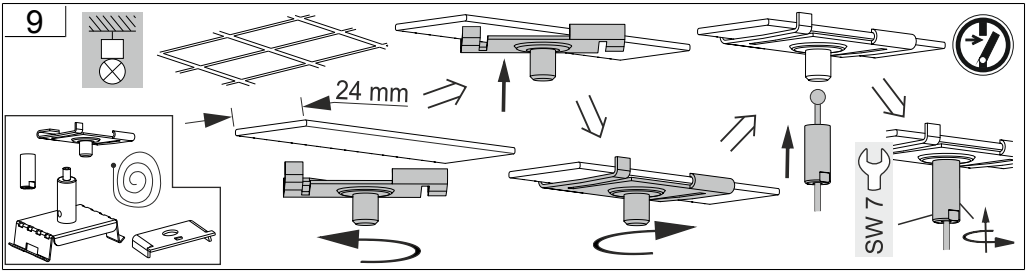


10

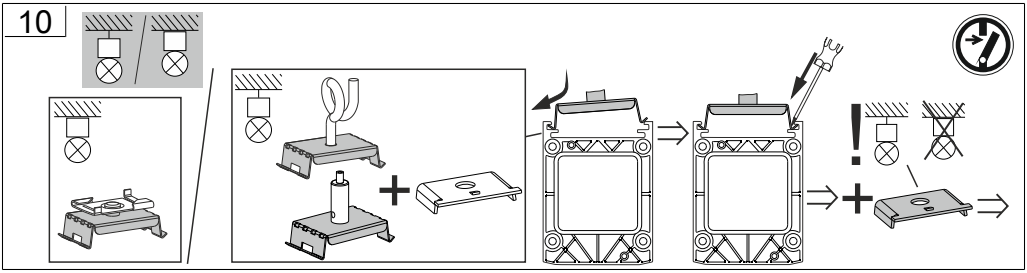


11

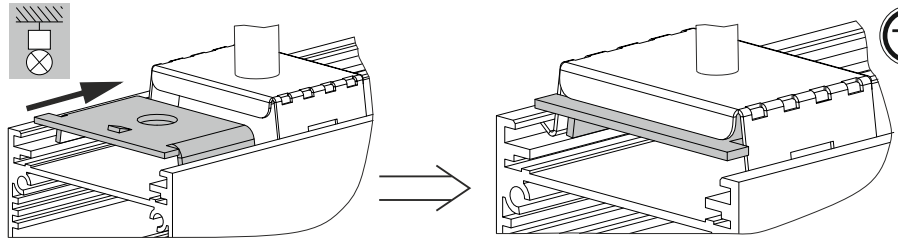


12

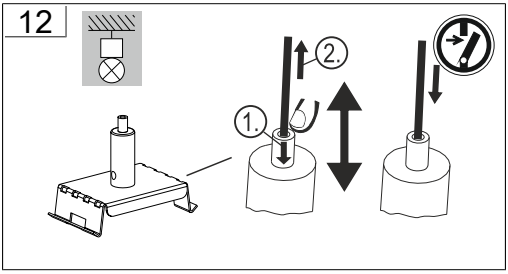
1.
2.


13

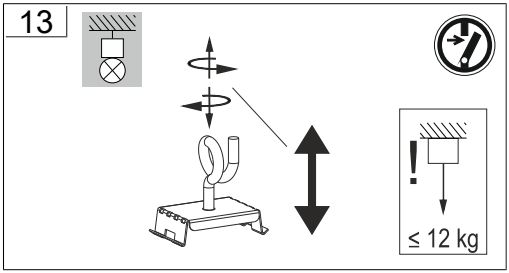
≤ 12 kg


14

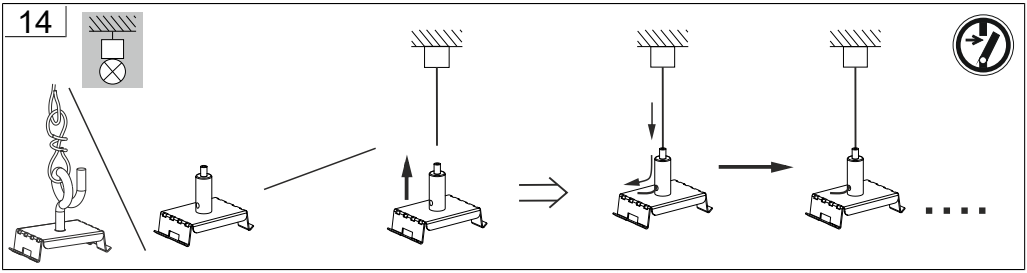


15

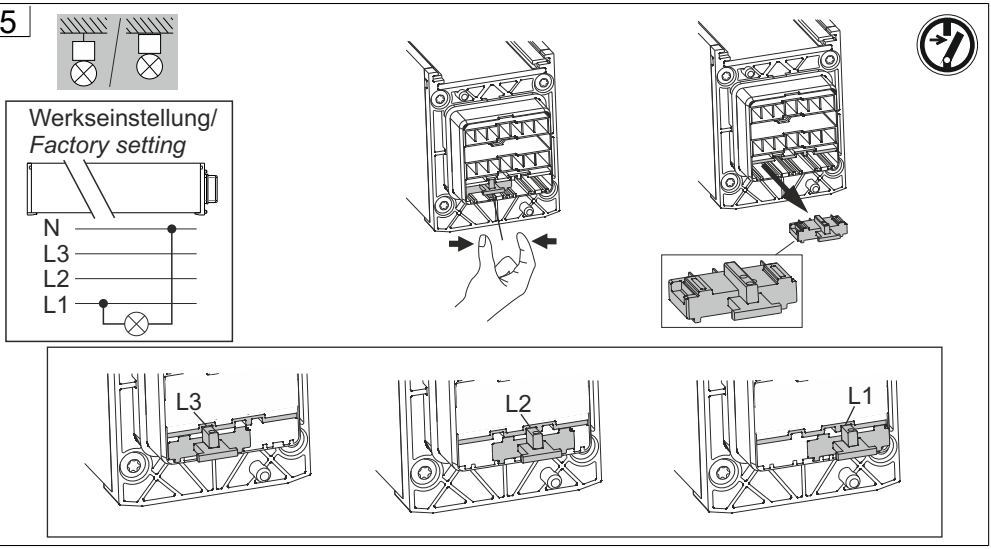
Werkseinstellung/
Factory setting
N
L3
L2
L1
L3
L2
L1


16

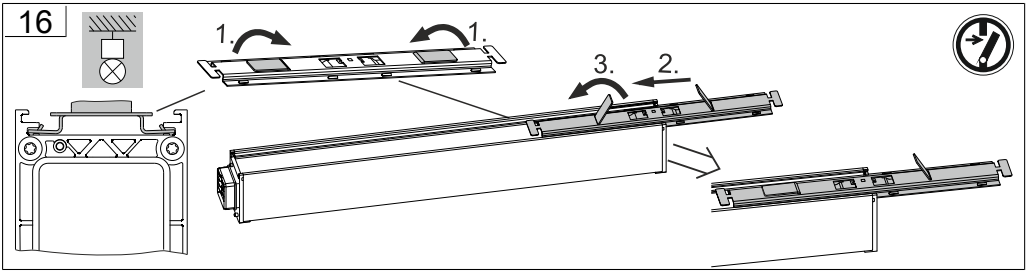
1.
1.
3.
2.


17

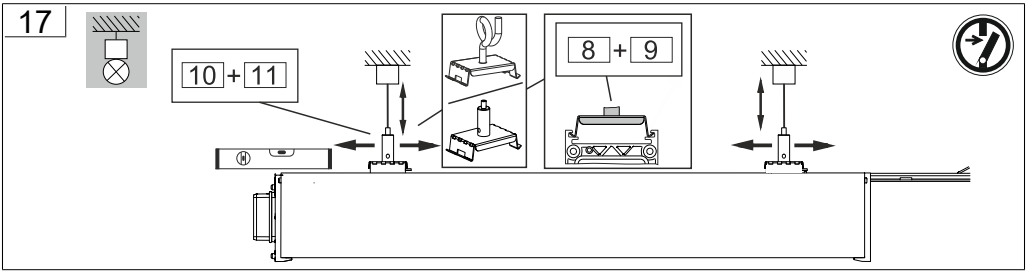


18

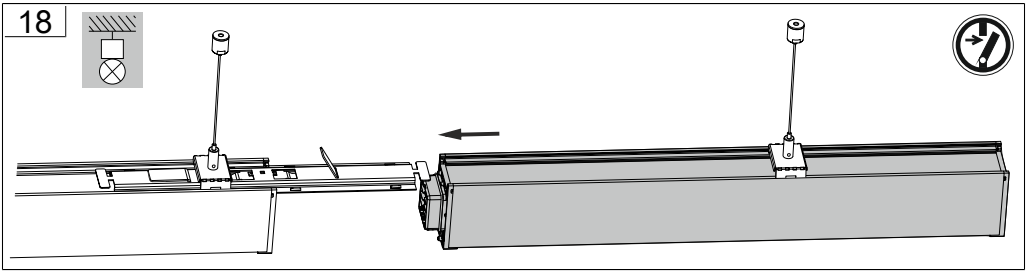


19

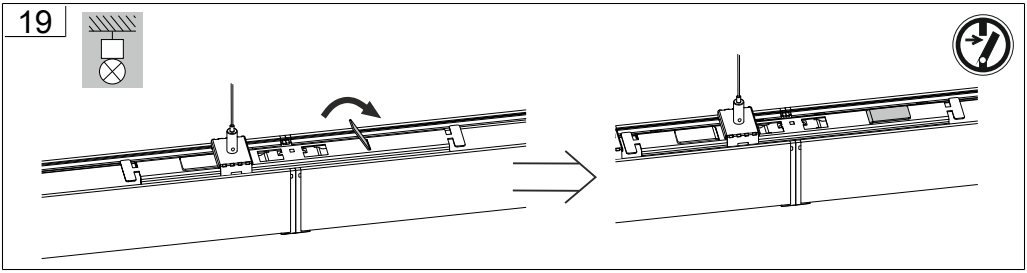


20

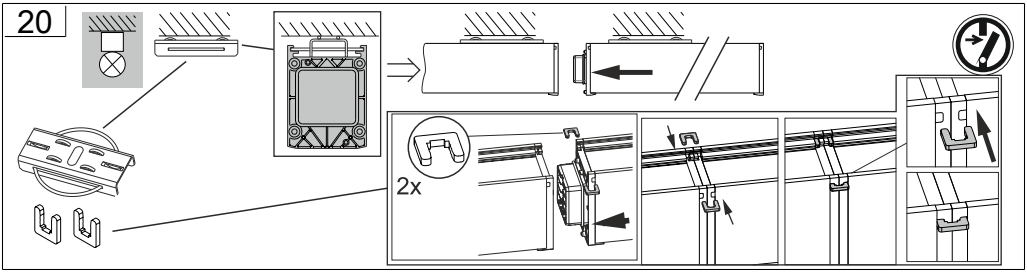


21

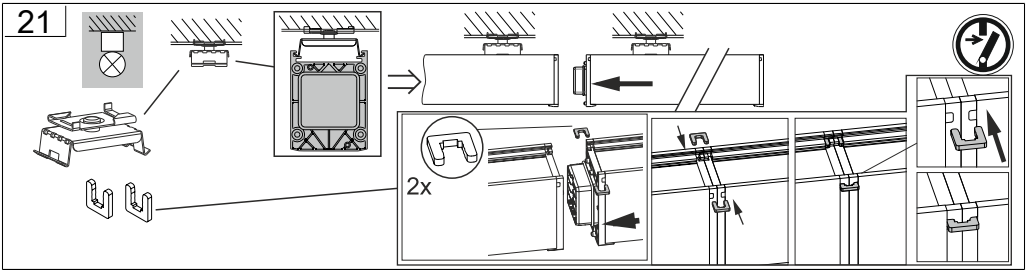


22

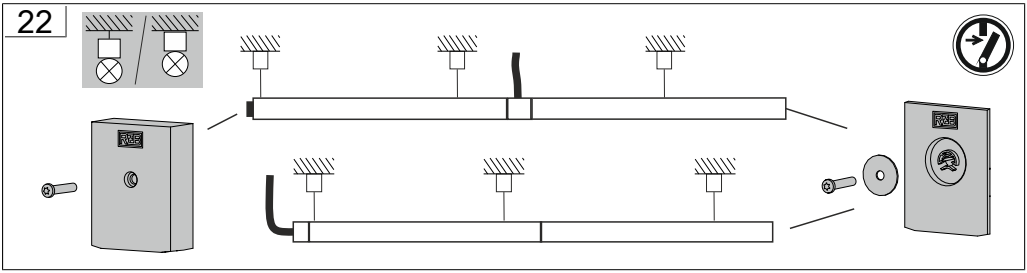


23

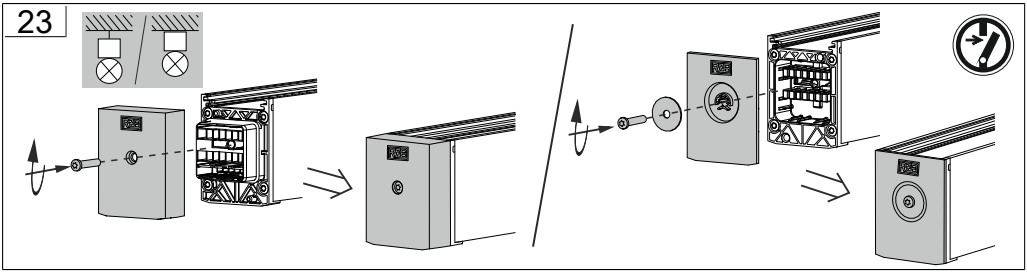


24

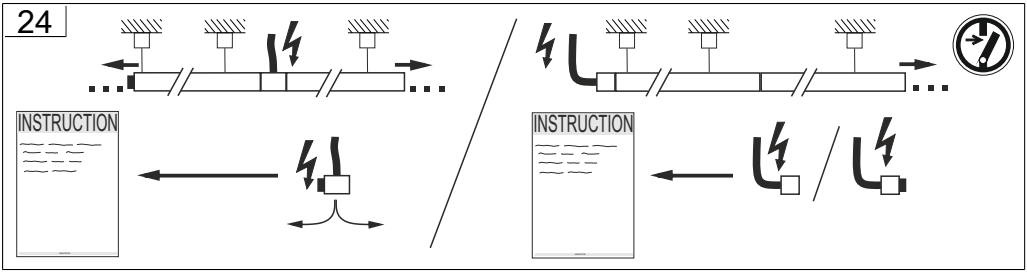

INSTRUCTION
INSTRUCTION

25

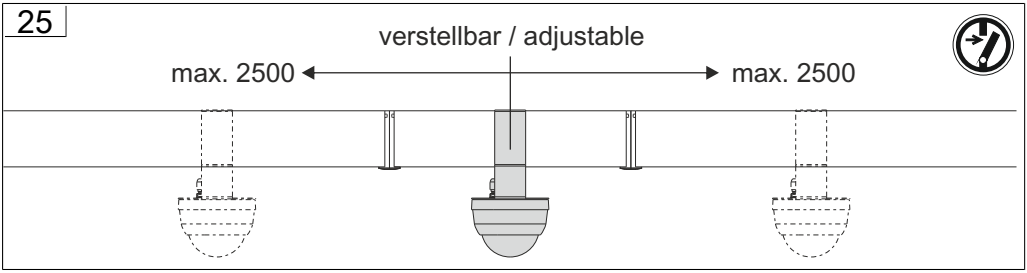

verstellbar / adjustable
max. 2500
max. 2500

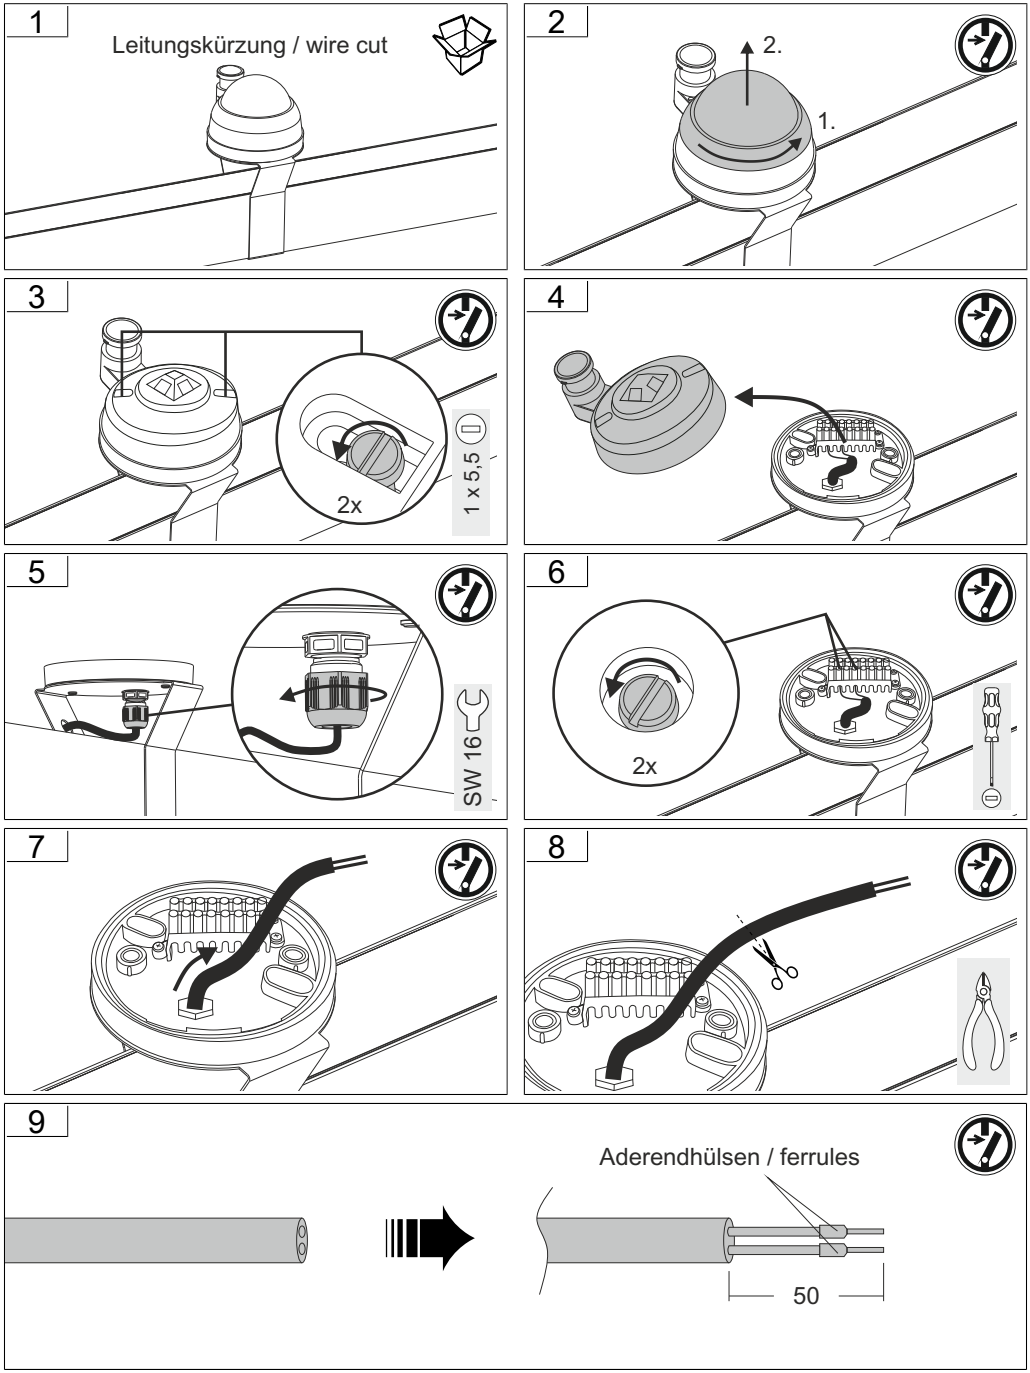
1
Leitungskürzung / wire cut
2
2.
1.
3
2x
1 x 5,5
4
5
SW 16
6
2x
7
8
9
Aderendhülsen / ferrules
50


10

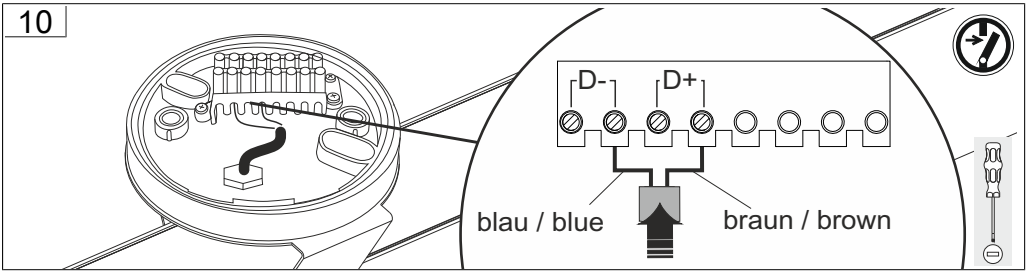


11

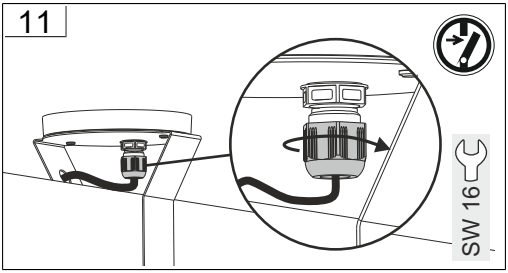


12

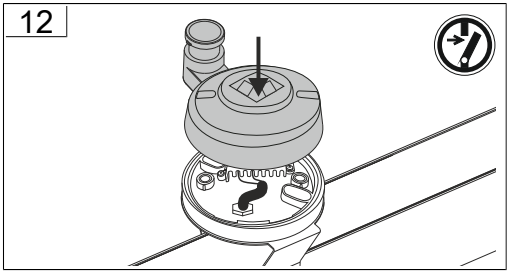


13

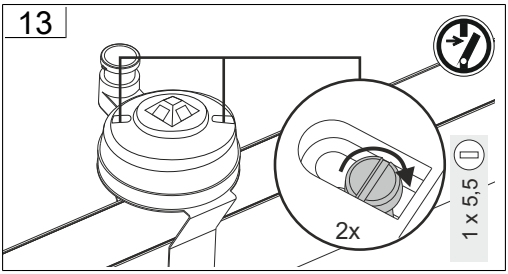

14

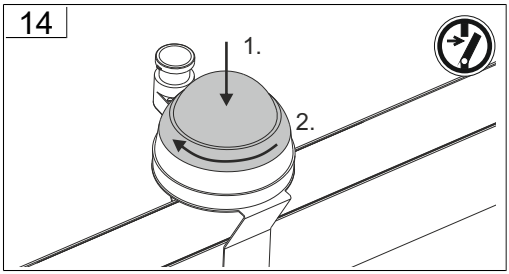

15

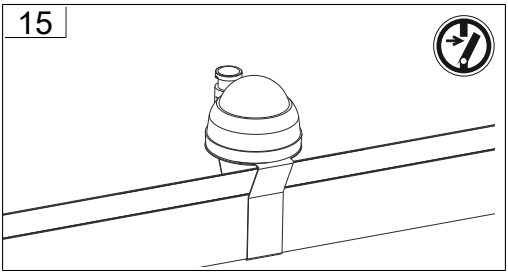




Bei Fragen zu unseren Symbolen, besuchen Sie folgende Webseite:

If you have any questions about our signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf

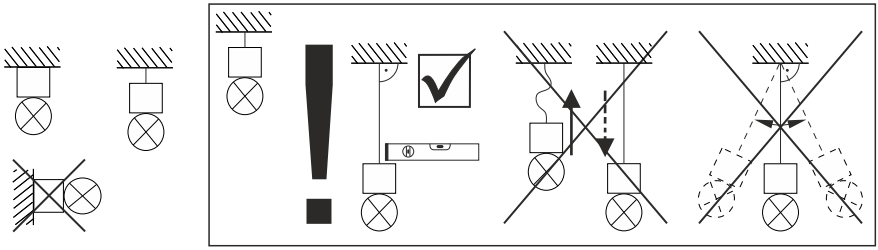



Informationen zum Sensor /
Information about the sensor

EU – DECLARATION OF CONFORMITY

For the products described below:

LUXOMAT® PD4-BMS-GH-SM **Art.Nr.: 93025**

it is hereby declared that these products are in conformity with the applicable protection requirements, set out in the Council Directives on harmonisation of legislation in Member States, concerning

1. electromagnetic compatibility (2014/30/EU)
2. the Low Voltage Directive (2014/35/EU)
3. restriction of the use of certain hazardous substances in electrical and electronic equipment (2011/65/EU).

In regard to point 1, assessment of the products was carried out using the following standards:

EN 55022 :2010
EN 50491-5-1 :2010
EN 50491-5-2 :2010
EN 50491-5-3 :2010

In regard to point 2, assessment of the products was carried out using the following standards:

EN 62386-101 :2014
EN 62386-103 :2014
EN 50491-2 :2010 + A1 :2015
EN 50491-3 :2009

In regard to point 3, assessment of the products was carried out using the following standards:

EN 50581:2012






If the products are altered without our authorisation, this declaration will no longer be valid.

Lindlar, 12/06/2019

Dipl. Ing. Rüdiger Schulte

Head of Development

Geschäftsführer: Dipl. Ing. F. Brück
Amtsgericht: Köln HRB 37515
B.E.G. Brück Electronic GmbH Gerberstr. 33 D-51789 Lindlar
Tel.: 0 22 66 / 90 12 10 Fax: 0 22 66 / 90 121-50 E-Mail: info@beg.de Homepage: www.beg-luxomat.com
Bankverbindung: Volksbank Oberberg IBAN: DE68 3846 2135 0014 8700 16 BIC: GENODED1WIL

	982678.000	Einspeisung / Feed	L 312, B 58, H 76	600 g
	982678.000.1	Einspeisung / Feed	L 330, B 58, H 76	728 g
	982698.000	Einspeisung / Feed	L 330, B 58, H 76	850 g
	982698.000.1	Einspeisung / Feed	L 312, B 58, H 76	850 g
	982698.000.2	Einspeisung / Feed	L 349, B 58, H 76	850 g
	982661.000	Pendelset / Pendant kit	, LP 1500	56 g
	982662.000	Pendelset / Pendant kit	, LP 1500	240 g
	982663.000	Befestigungsset / Fixture	L 33, B 54,	63 g
	982664.000	Befestigungsset / Fixture	L 33, B 54,	39,1 g
	982665.000	Pendelset / Pendant kit	, LP 1500	80 g
	982717.000	Pendelset / Pendant kit	, LP 5000	190 g
	982718.000	Pendelset / Pendant kit	, LP 5000	800 g

	982719.000	Pendelset / Pendant kit	, LP 5000	270 g
	982580.010	Deckenmontageset / Ceiling surface mounting kit	L 70, B 28, H 16	44 g
	982666.000	Befestigungsset / Fixture	L 33, B 54,	25 g
	982699.009	Endkappe / End cap	L 16, B 58, H 76	21,5 g
	982700.009	Endkappe / End cap	L 23, B 58, H 76	31 g
	982680.000	Verbinder / Connector	L 330, B 48, H 9	181 g







RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg
Telefon: 0951/7909-0
Telefax: 0951/7909-198
E-mail: info@rzb-leuchten.de