


PLL 26.0385.830.1/DALI

PL 26 (1xLED 26W 830/3000K 2890lm)

— C0/C180 cd / 1000 lm - - - C90/C270

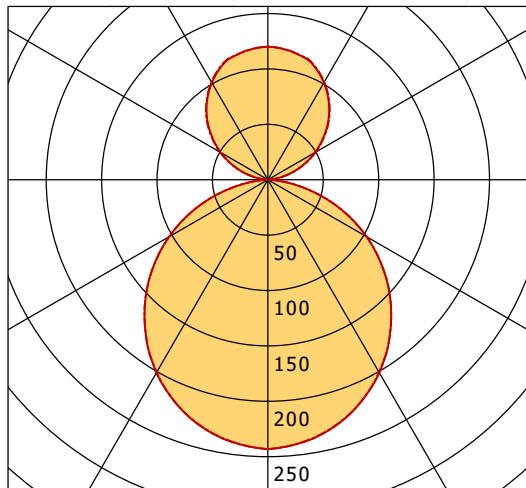

	C0	C90	C180	C270
0°	243	243	243	243
30°	201	201	201	201
60°	103	103	103	103
90°	1	1	1	1
120°	49	50	49	50
150°	101	102	101	102
180°	120	120	120	120
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	111 lm/W
Direct/Indirect	↓ 67% / ↑ 33%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.8
UGR C90/C270	19.8
CIE Flux Codes	48 79 96 67 100
Ra/CRI	> 80