



CSARL 71.5040.25

CSA 71 Round (1xLED 50W 840/4000K 5630lm 26°)

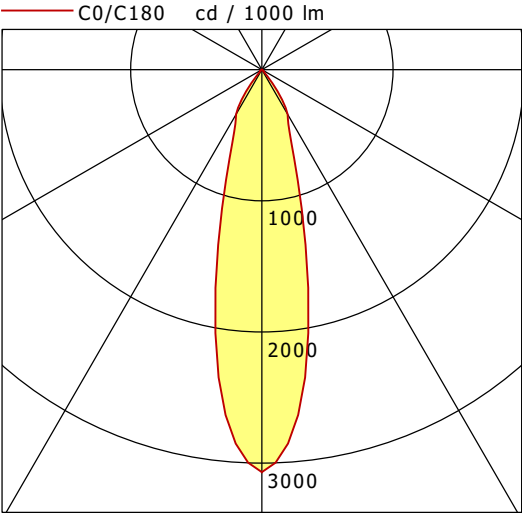

	C0	C90	C180	C270
0°	3069	3069	3069	3069
15°	1232	1232	1232	1232
30°	393	393	393	393
45°	14	14	14	14
60°	10	10	10	10
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

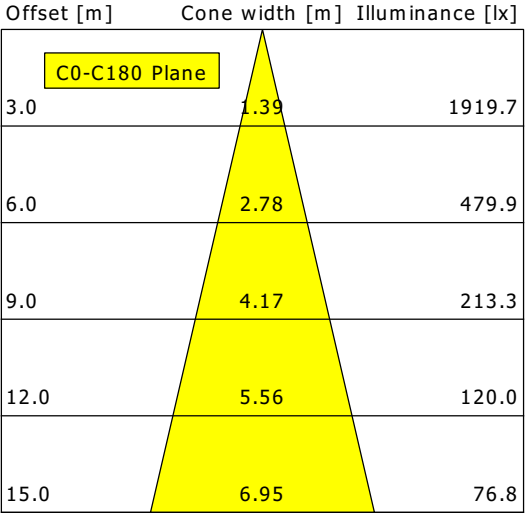

η		LED
Efficiency		113 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		50 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.5
UGR C90/C270		21.5
CIE Flux Codes	96 99 100 100 100	
Ra/CRI		> 80