


ALFL 10.2540.1


AllFive (1xLED 19W 840/4000K 3030lm)

— C0/C180 cd / 1000 lm - - - C90/C270

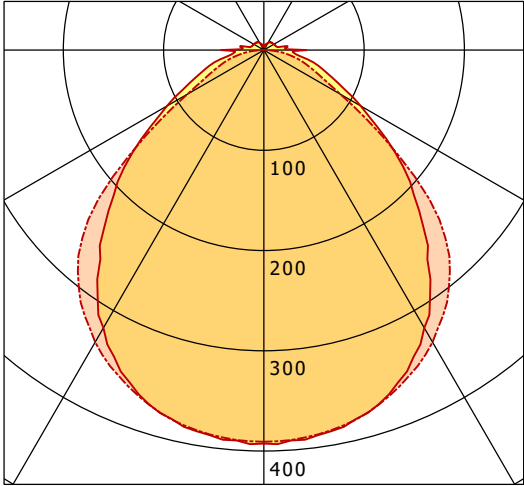

	C0	C90	C180	C270
0°	393	391	393	391
15°	378	378	378	378
30°	320	336	320	336
45°	215	253	215	253
60°	112	88	112	88
75°	54	36	54	36
90°	43	1	43	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

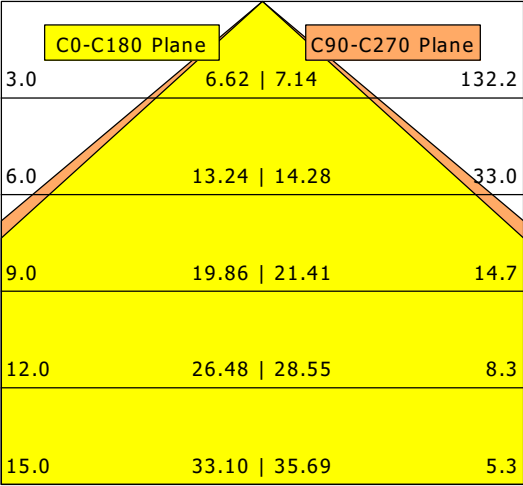

η	LED
Efficiency	159 lm/W
Direct/Indirect	↓ 95% / ↑ 5%
System Power	19 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.5
UGR C90/C270	22.2
CIE Flux Codes	55 84 95 95 100
Ra/CRI	> 80