



CSALP 40.1027.50/DALI

CSA 40 (1xLED 14W 827/2700K 1330lm 50 °)

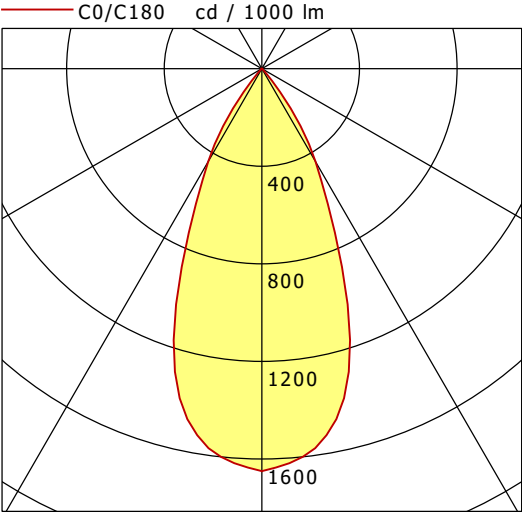

	C0	C90	C180	C270
0°	1650	1650	1650	1650
15°	1345	1345	1345	1345
30°	440	440	440	440
45°	8	8	8	8
60°	2	2	2	2
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

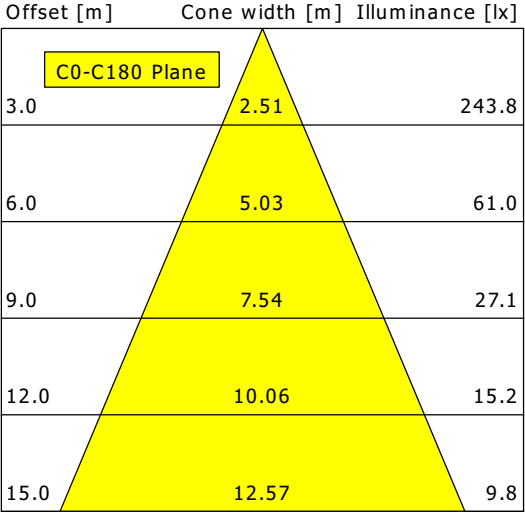

η		LED
Efficiency		95 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		14 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.3
UGR C90/C270		17.3
CIE Flux Codes	98 99 100 100 100	
Ra/CRI		> 80