



CSALP 60.2027.50/DALI

CSA 60 (1xLED 27W 827/2700K 2520lm 50 °)

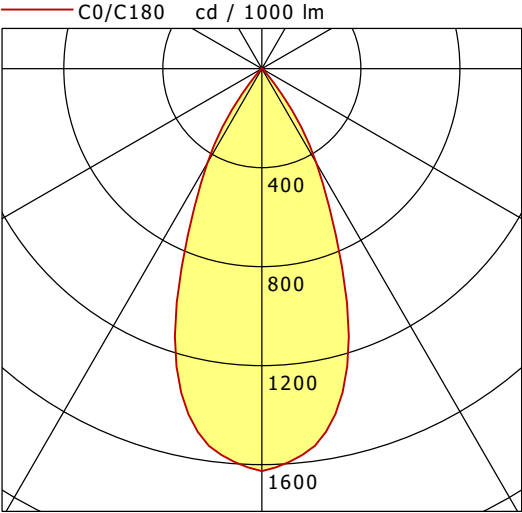

	C0	C90	C180	C270
0°	1626	1626	1626	1626
15°	1302	1302	1302	1302
30°	440	440	440	440
45°	18	18	18	18
60°	5	5	5	5
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

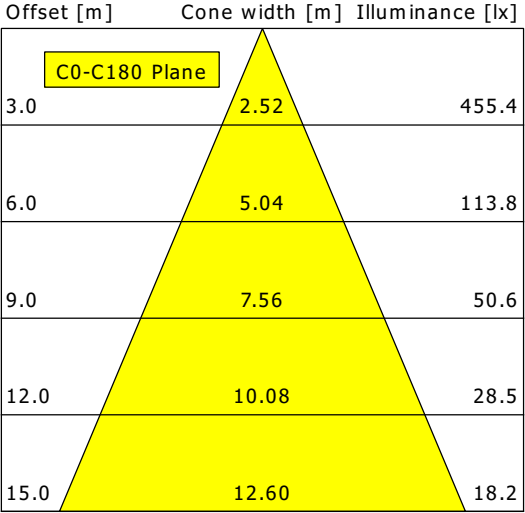

η		LED
Efficiency		93 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.0
UGR C90/C270		20.0
CIE Flux Codes	97 99 100 100 100	
Ra/CRI		> 80