



TORL 302.830.35.2/DALI-EU

Torpedo 300 (1xLED 25W 830/3000K 2470lm 35 °)

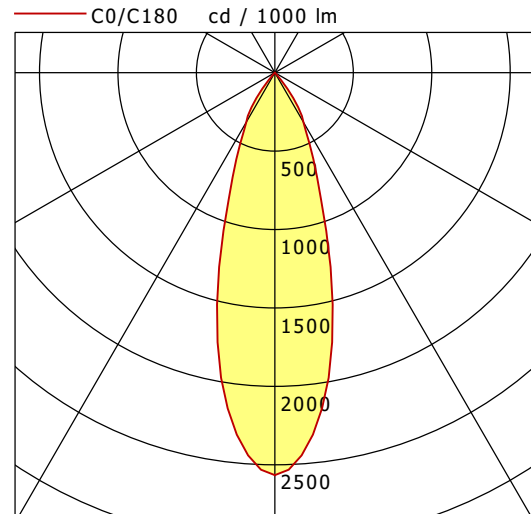

	C0	C90	C180	C270
0°	2566	2566	2566	2566
15°	1406	1406	1406	1406
30°	364	364	364	364
45°	3	3	3	3
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

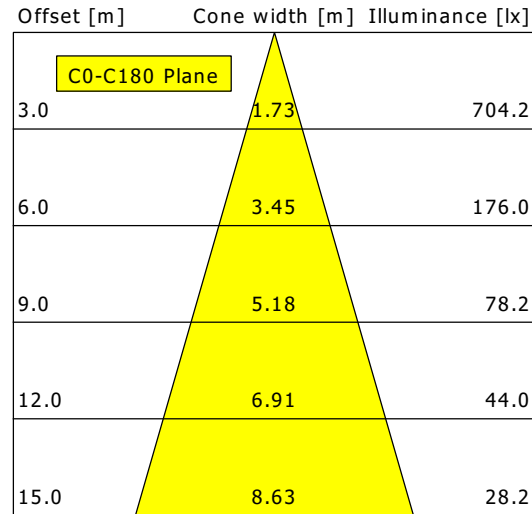

η	LED
Efficiency	99 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.3
UGR C90/C270	19.3
CIE Flux Codes	100 100 100 100 100
Ra/CRI	>80