


DOMFLQ 209.40.03

Domino Flat Square QS (1xLED 18W 840/4000K 2150lm)

— C0/C180 cd / 1000 lm - - - C90/C270

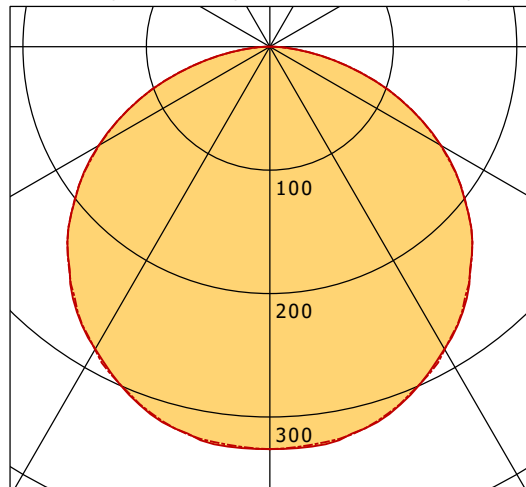

	C0	C90	C180	C270
0°	326	326	326	326
15°	318	317	318	317
30°	283	283	283	283
45°	232	232	232	232
60°	160	160	160	160
75°	71	71	71	71
90°	3	3	3	3
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	10.17 10.13		77.9
6.0	20.35 20.25		19.5
9.0	30.52 30.38		8.7
12.0	40.70 40.51		4.9
15.0	50.87 50.63		3.1

η	LED
Efficiency	119 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	29.0
UGR C90/C270	29.0
CIE Flux Codes	45 77 95 100 100
Ra/CRI	>80