


LUNS 304.830.1/DALI

Lunata Small (1xLED 41W 830/3000K 4250lm)

— C0/C180 cd / 1000 lm - - - C90/C270

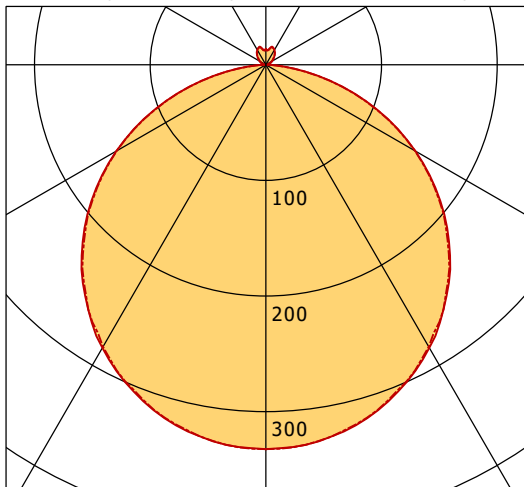

	C0	C90	C180	C270
0°	332	332	332	332
15°	320	319	320	319
30°	283	282	283	282
45°	225	223	225	223
60°	149	149	149	149
75°	63	63	63	63
90°	2	1	2	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	9.19 9.13	157.0	
6.0	18.38 18.26	39.2	
9.0	27.58 27.39	17.4	
12.0	36.77 36.52	9.8	
15.0	45.96 45.65	6.3	

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 96% / ↑ 4%
System Power	41 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.0
UGR C90/C270	22.0
CIE Flux Codes	47 79 96 96 100
Ra/CRI	>80