


# LK-LED 045.0740.0565.1/DALI


Lichtkanal 045 | Light-Insert (AOV-002/005.2, 1xLED 8W 840/4000K 910lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

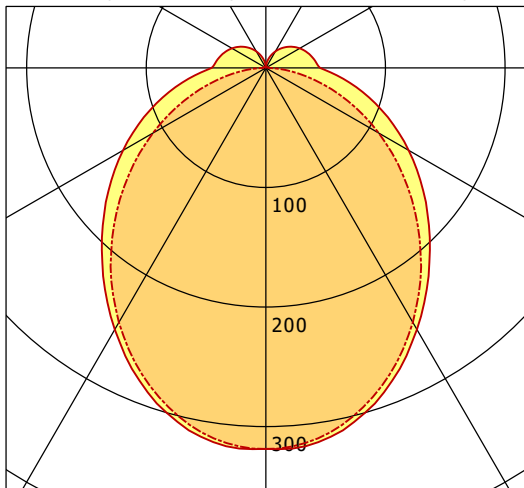

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 319 | 319 | 319  | 319  |
| 30°          | 253 | 246 | 253  | 246  |
| 60°          | 138 | 109 | 138  | 109  |
| 90°          | 45  | 3   | 45   | 3    |
| 120°         | 33  | 1   | 33   | 1    |
| 150°         | 16  | 1   | 16   | 1    |
| 180°         | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

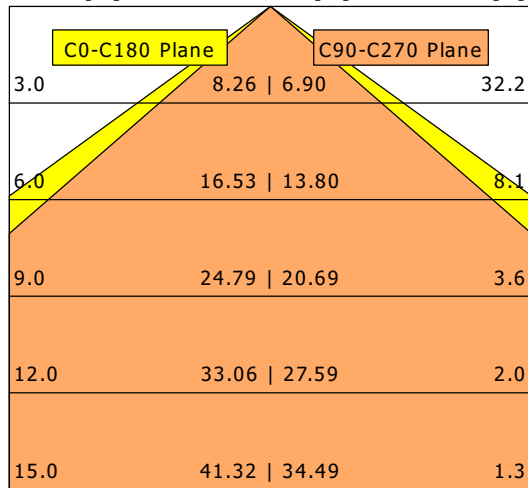

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 114 lm/W        |
| Direct/Indirect    | ↓ 88% / ↑ 12%   |
| System Power       | 8 W             |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 26.2            |
| UGR C90/C270       | 23.2            |
| CIE Flux Codes     | 46 75 92 88 100 |
| Ra/CRI             | >80             |