


LUNXS 301.830.1/DALI

Lunata XSmall (1xLED 18W 830/3000K 1700lm)

— C0/C180 cd / 1000 lm - - - C90/C270

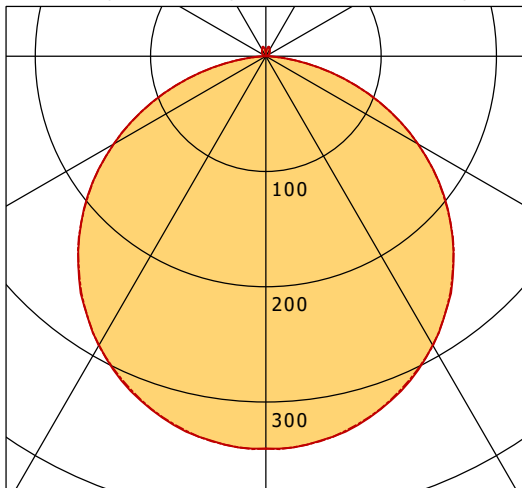

	C0	C90	C180	C270
0°	340	340	340	340
15°	328	327	328	327
30°	289	290	289	290
45°	230	230	230	230
60°	152	152	152	152
75°	65	64	65	64
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	9.15 9.15	64.3
6.0	18.30 18.29	16.1
9.0	27.46 27.44	7.1
12.0	36.61 36.59	4.0
15.0	45.76 45.74	2.6

η	LED
Efficiency	94 lm/W
Direct/Indirect	↓ 98% / ↑ 2%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.5
UGR C90/C270	21.5
CIE Flux Codes	47 79 96 98 100
Ra/CRI	>80