


Article-No: 5240115

Tubular Luminaires

Luminaire TUBIS BL RESISTANT 1566mm PO 1x48W 120° 6500lm

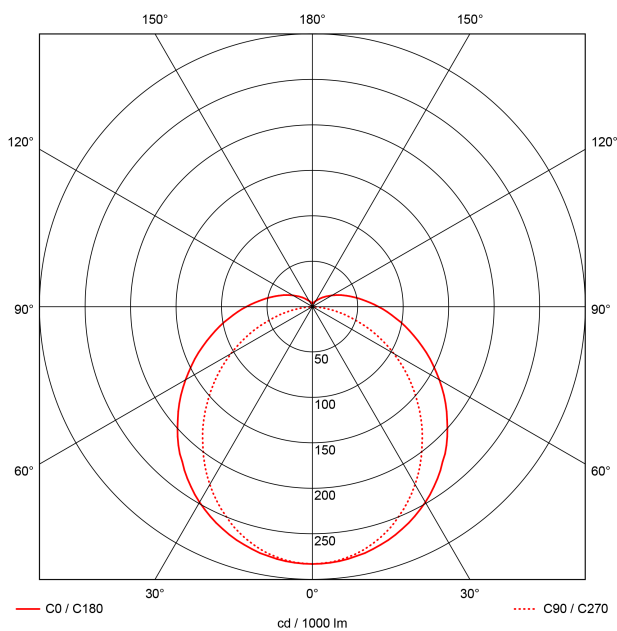

LED damp-proof tubular luminaire TUBIS BL RESISTANT, with (impact-resistant) opalized PMMA luminaire housing, short ageing-resistant silicone seals, PRACHT stainless steel clamp system, 3x1.5 mm² through-wiring integrated at the factory. LED round tube luminaire with protective coated LED chips, conductors and wiring as well as encapsulated converter special design and the two-step encapsulation and coating process. Aggressive Gase und Dämpfe strapazieren das Material und die Elektronik extrem. WIDERSTAND leistet hier die TUBIS BL RESISTANT! Sie ist die ideale Lichtlösung für besondere Anwendungsgebiete. Optimal für Reifenlager, Werkstätten und schwefelbehaftete Bereiche. Variable Befestigungsabstände und einfache Montage durch PRACHT-Edelstahl-Schellen, Leuchte 360° in der Schelle rotierbar, geeignet zur Decken-, Pendel-, waagerechte und senkrechte Wandmontage. Weitere Resistenzen, Lichtfarben, Steuerung, Diese Leuchte ist in der PRO-LINE Ausführung individuell konfigurierbar!

EAN 4018098363675

Statistical product number 94054231

LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>80
Amount LED	180
Color tolerance (initial MacAdam)	4
Controll unit exchangeable	no
Lightsource exchangeable	no

NUMBER OF LAMPS

Luminous flux lm	6500
Systempower W	48
Efficacy lm/W	148

LIGHT ENGINEERING

Light distributor	Diffusor lense/-optic-panel
Light distribution	wide beam
Light distribution angle in °	120

TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	I
Ballast	LED-converter on/off
Through-wiring mm ²	3x1,5
Glow wire test	650 °C
D-rating	yes
Type of voltage	AC/DC
Circuit breaker B10A	15
Circuit breaker B16A	24
Circuit breaker C10A	24
Circuit breaker C16A	39
Voltage spike protection U (L-N)	1

CAPACITY

IK-Impact resistance	06
Warranty (years)	3
Life expectancy B50 at 25° L70/B50 25°C	in hours (h) 50000
Outdoor areas	Suitable for unprotected outdoor area if within close building proximity with cable entry bottom- or sidewise
max. lowest temperature in °C	-20
max. highest temperature in °C	35
Ingress protection class	67/x9K
Agricultural use	without limitations
Attribute	hohe chemische Beständigkeit

DIMENSIONS AND WEIGHT

Length mm	1566
Width mm	81
Height mm	80
Outside diameter in mm	70
Weight netto in kg	1.88

PACKAGING

PU 1 piece	Box
Length m PU1	1.59
Width m PU1	0.85
Height m PU1	0.75
Gross weight kg PU1	2.2

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling, horizontal and vertical wall
Optional installation	Pendulum, Rail installation
exchangeable LED board	not possible

MATERIAL

Case color	opal
Renewable resources possible	no
Housing material	PMMA-OPAL
Cover material	PMMA-OPAL

The right of error and later technical developments is reserved.

State: 21.01.2022