


LUNM 404.830.1/DALI


Lunata Medium (1xLED 38W 830/3000K 4570lm)

— C0/C180 cd / 1000 lm - - - C90/C270

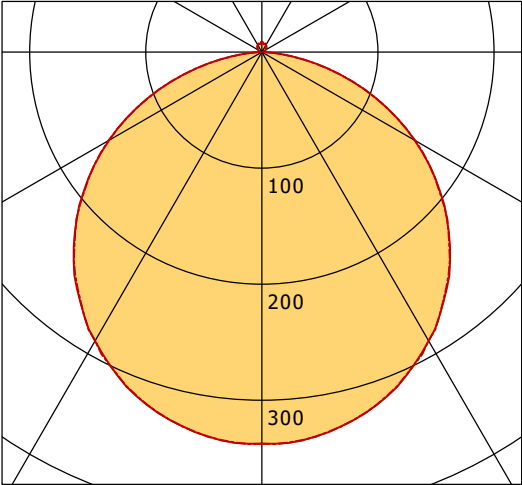

	C0	C90	C180	C270
0°	337	337	337	337
15°	325	325	325	325
30°	287	287	287	287
45°	229	228	229	228
60°	152	153	152	153
75°	64	64	64	64
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

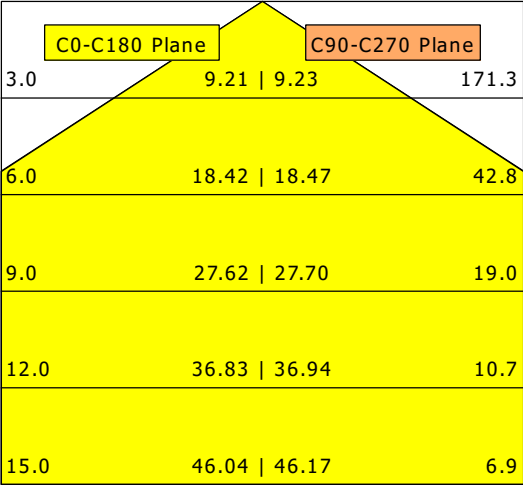

η	LED
Efficiency	120 lm/W
Direct/Indirect	↓ 98% / ↑ 2%
System Power	38 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.5
UGR C90/C270	19.5
CIE Flux Codes	47 79 96 98 100
Ra/CRI	> 80