


LUNM 204.830.1/DALI


Lunata Medium (1xLED 38W 830/3000K 4570lm)

— C0/C180 cd / 1000 lm - - - C90/C270

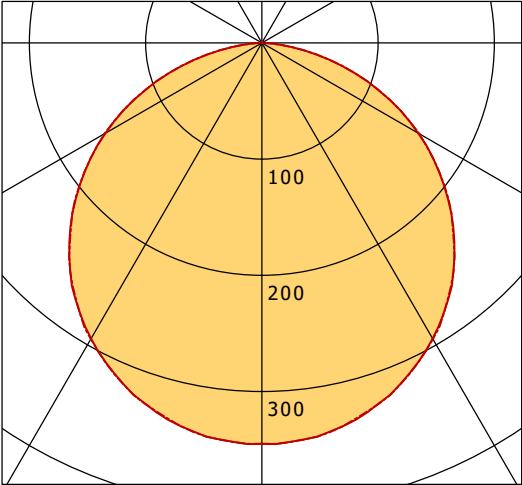

	C0	C90	C180	C270
0°	345	345	345	345
15°	332	332	332	332
30°	294	294	294	294
45°	234	233	234	233
60°	155	157	155	157
75°	66	66	66	66
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

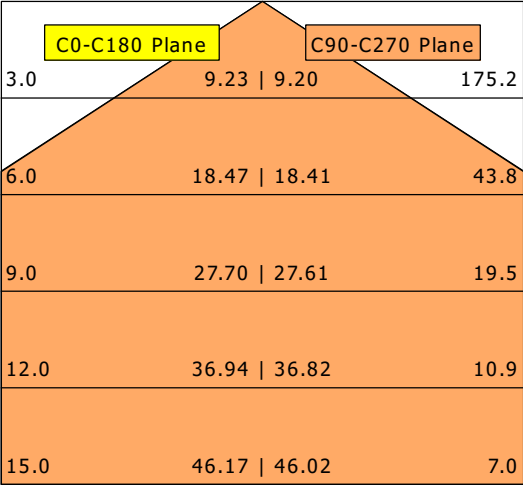

η		LED
Efficiency		120 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		38 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.7
UGR C90/C270		19.7
CIE Flux Codes		47 79 96 100 100
Ra/CRI		> 80