


LK-LED 060.1130.0985.1/DALI

Lichtkanal 060 | Light-Insert (Wallwasher nanoOptix, 1xLED 29W 830/3000K 3680lm)

— C0/C180 cd / 1000 lm - - - C90/C270

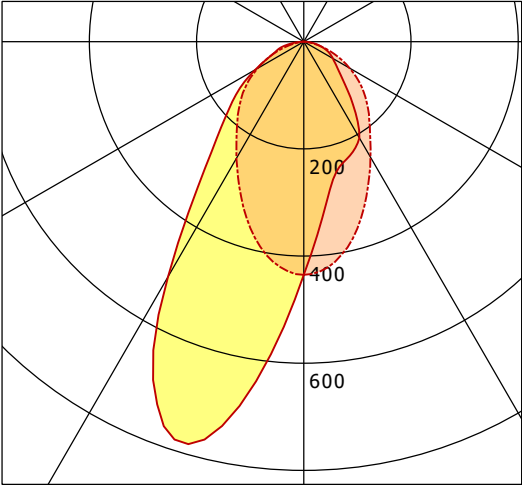

	C0	C90	C180	C270
0°	435	435	435	435
15°	246	371	775	370
30°	207	249	507	251
45°	105	168	212	170
60°	63	98	104	100
75°	33	32	46	32
90°	0	0	0	0
cd / 1000 lm				

LDC unsuitable for cone representation.
Asymetric LDC.

η Efficiency	LED 127 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	29 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.4
UGR C90/C270	25.9
CIE Flux Codes	58 86 97 100 100
Ra/CRI	> 80