


# ML-E 045.1040.11 APB/DALI


Monoline 045 | Recessed (1xLED 26W 840/4000K 2500lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

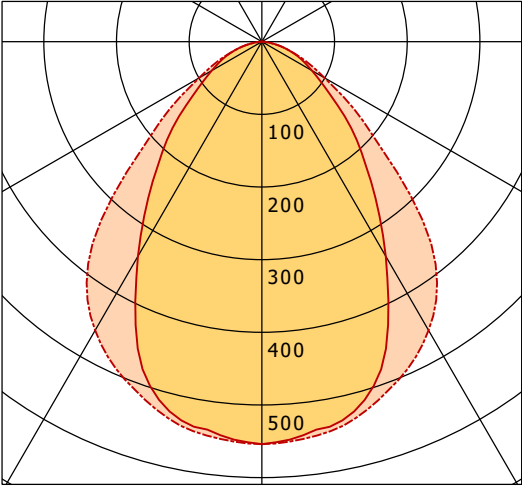

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 554 | 554 | 554  | 554  |
| 15°          | 519 | 530 | 519  | 530  |
| 30°          | 341 | 459 | 341  | 459  |
| 45°          | 179 | 277 | 179  | 277  |
| 60°          | 80  | 100 | 80   | 100  |
| 75°          | 31  | 31  | 31   | 31   |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

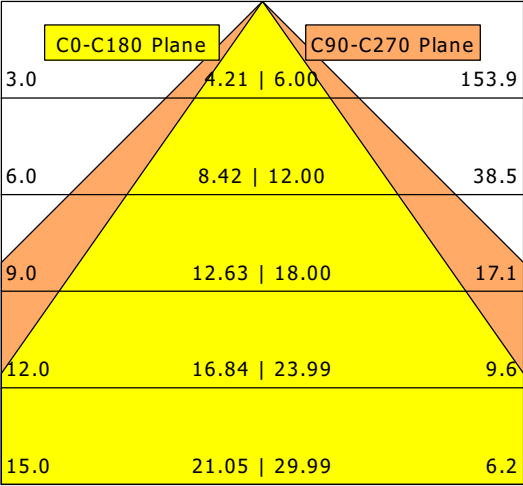

|                    |                  |
|--------------------|------------------|
| <b>η</b>           | LED              |
| Efficiency         | 96 lm/W          |
| Direct/Indirect    | ↓ 100% / ↑ 0%    |
| System Power       | 26 W             |
| <b>UGR</b>         | X=4H, Y=8H       |
| Reflection factors | 70/50/20         |
| UGR C0/C180        | 22.1             |
| UGR C90/C270       | 22.9             |
| CIE Flux Codes     | 65 90 98 100 100 |
| Ra/CRI             | > 80             |