


PLL 25.0675.830.1/DALI

PL 25 (1xLED 67W 830/3000K 7130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

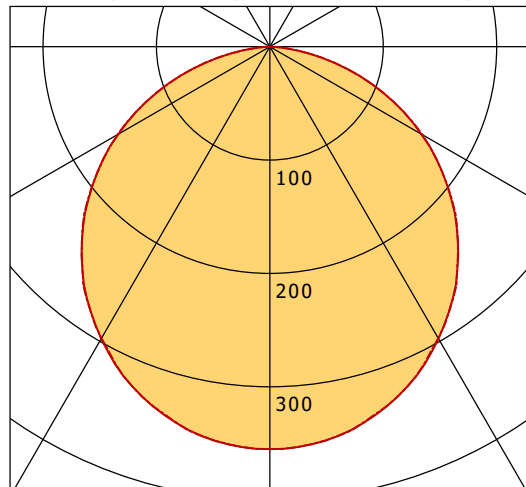

	C0	C90	C180	C270
0°	355	355	355	355
15°	340	339	340	339
30°	298	297	298	297
45°	234	234	234	234
60°	154	155	154	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.88 8.86	281.2
6.0	17.76 17.72	70.3
9.0	26.64 26.59	31.2
12.0	35.53 35.45	17.6
15.0	44.41 44.31	11.2

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	67 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.9
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80