


PLL 23.0385.830.1/DALI


PL 23 (1xLED 18W 830/3000K 1920lm)

— C0/C180 cd / 1000 lm - - - - C90/C270

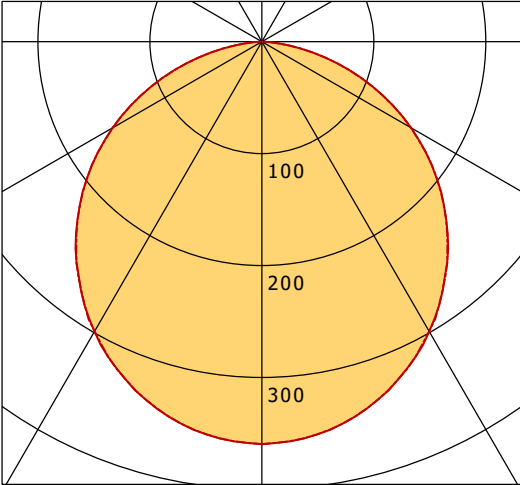

	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

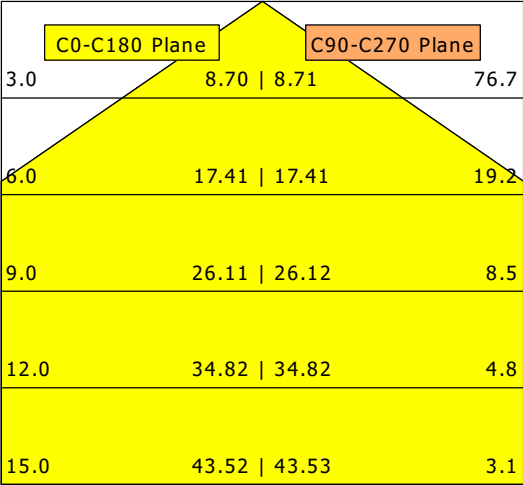

η		LED
Efficiency		107 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		18 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.3
UGR C90/C270		22.3
CIE Flux Codes		48 79 96 100 100
Ra/CRI		> 80