


BIXX-T 103.830.15

Bixx Evo (1xLED 33W 830/3000K 3750lm 15°)

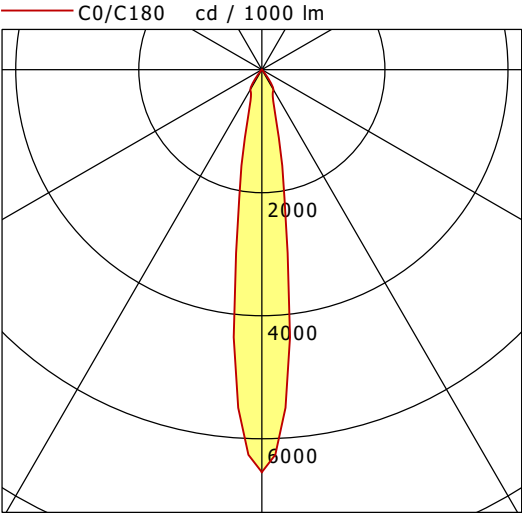

	C0	C90	C180	C270
0°	6543	6543	6543	6543
15°	965	965	965	965
30°	376	376	376	376
45°	4	4	4	4
60°	4	4	4	4
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.79	2726.1
6.0	1.59	681.5
9.0	2.38	302.9
12.0	3.17	170.4
15.0	3.97	109.0

η		LED
Efficiency		114 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		33 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.9
UGR C90/C270		19.9
CIE Flux Codes	99 99 100 100 100	
Ra/CRI		> 80