


CSALP 61.20.50/B


CSA 60 (1xLED 36W BAKERY 3270lm)

— C0/C180 cd / 1000 lm

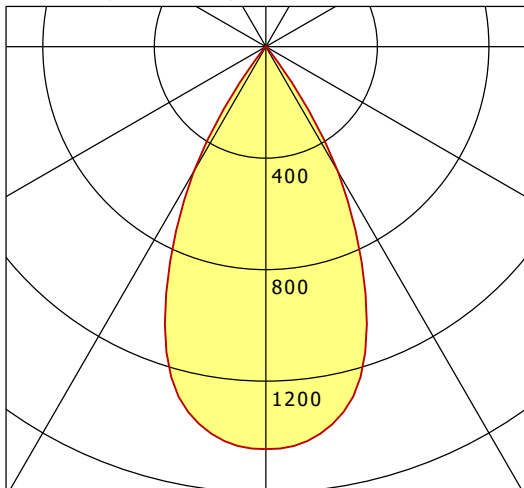

	C0	C90	C180	C270
0°	1444	1444	1444	1444
15°	1266	1266	1266	1266
30°	517	517	517	517
45°	8	8	8	8
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

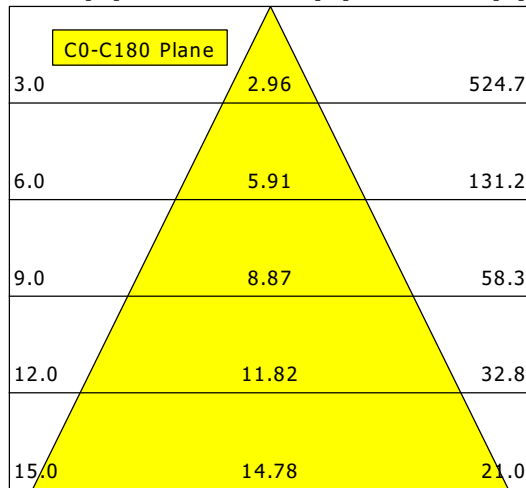

η	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	36 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.3
UGR C90/C270	20.3
CIE Flux Codes	98 99 100 100 100
Ra/CRI	---