


LK-LED 070.1040.1685.1


Lichtkanal 070 - Light-Insert (AOV-002/005.2, 1xLED 27W 840/4000K 3020lm)

— C0/C180 cd / 1000 lm - - - C90/C270

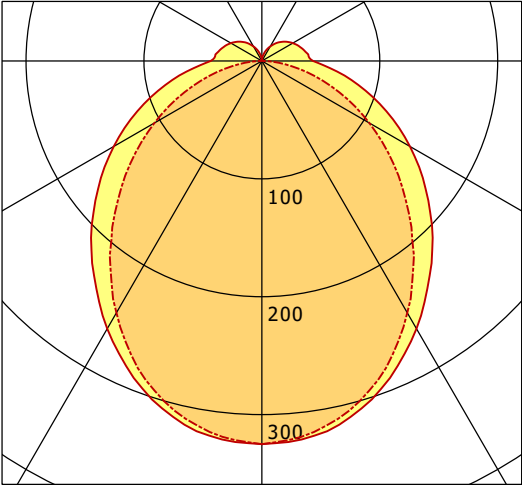

	C0	C90	C180	C270
0°	325	325	325	325
30°	262	247	262	247
60°	145	105	145	105
90°	43	1	43	1
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

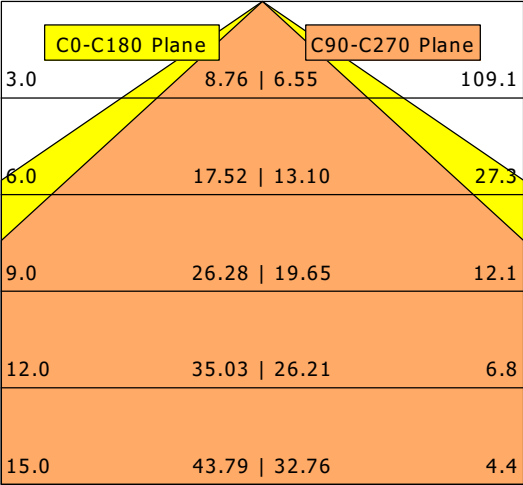

η		LED
Efficiency		112 lm/W
Direct/Indirect		↓ 89% / ↑ 11%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		25.2
UGR C90/C270		21.9
CIE Flux Codes		46 75 92 89 100
Ra/CRI		> 80