



# VTRS 12.0530.35/DALI

Vale-Tu Round Small (1xLED 12W 830/3000K 1050lm Wide-Flood °)

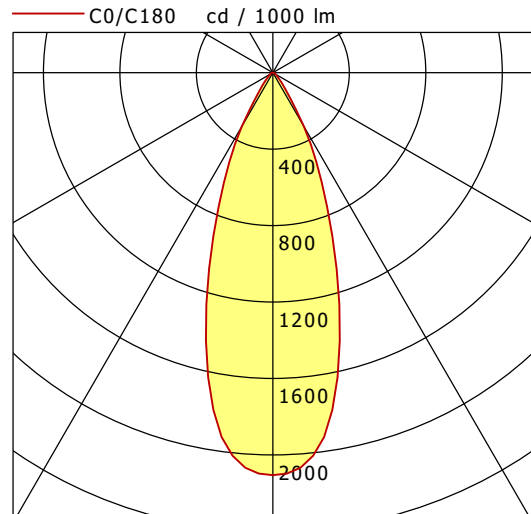

	C0	C90	C180	C270
0°	2106	2106	2106	2106
15°	1355	1355	1355	1355
30°	324	324	324	324
45°	46	46	46	46
60°	16	16	16	16
75°	8	8	8	8
90°	0	0	0	0
cd / 1000 lm				

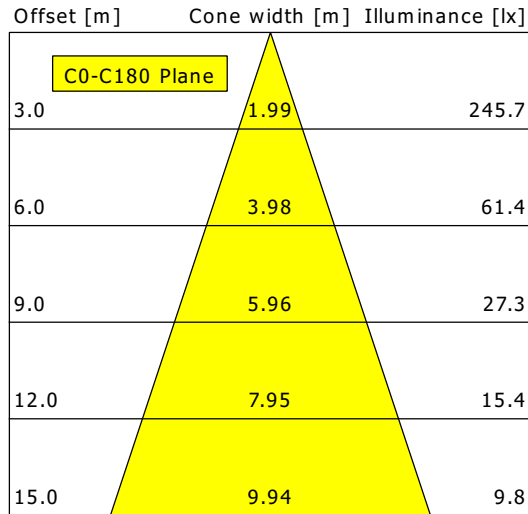

<b>η</b>	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.4
UGR C90/C270	22.4
CIE Flux Codes	93 98 99 100 100
Ra/CRI	>80