


VFCL 700.5540


Vario Classic (1xLED 59W 840/4000K 5720lm 80 °)

— C0/C180 cd / 1000 lm - - - C90/C270

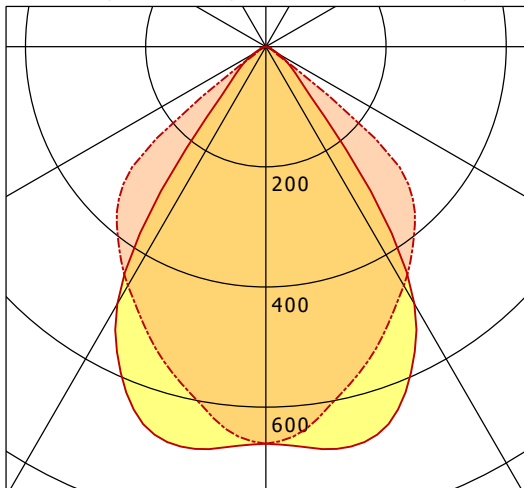

	C0	C90	C180	C270
0°	661	661	661	661
15°	676	572	676	572
30°	494	459	494	459
45°	83	341	83	341
60°	25	15	25	15
75°	3	10	3	10
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

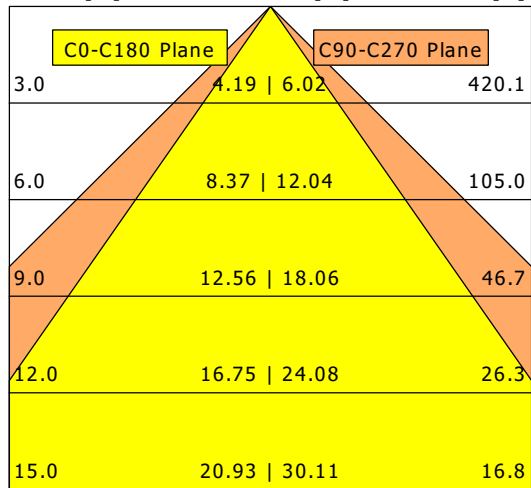

η	LED
Efficiency	97 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	59 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.1
UGR C90/C270	29.0
CIE Flux Codes	78 98 100 100 100
Ra/CRI	>80