


# ML-E 070.1140.14 AOB/DALI

Monoline 070 Recessed (1xLED 55W 840/4000K 5500lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

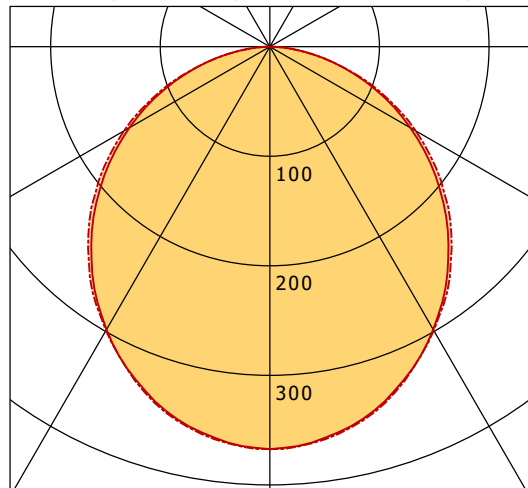

	C0	C90	C180	C270
0°	367	367	367	367
15°	348	349	348	349
30°	298	299	298	299
45°	229	234	229	234
60°	148	154	148	154
75°	65	65	65	65
90°	1	1	1	1
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.12	8.45	224.5
6.0	16.25	16.89	56.1
9.0	24.37	25.34	24.9
12.0	32.49	33.78	14.0
15.0	40.61	42.23	9.0

<b>η</b>	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	55 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.8
UGR C90/C270	26.8
CIE Flux Codes	48 79 96 100 100
Ra/CRI	> 80