


LKIP-L 070.10830.1968.1/DALI


Lichtkanal 070 IP | Light-Insert (AOB, 1xLED 90W 830/3000K 8310lm)

— C0/C180 cd / 1000 lm - - - C90/C270

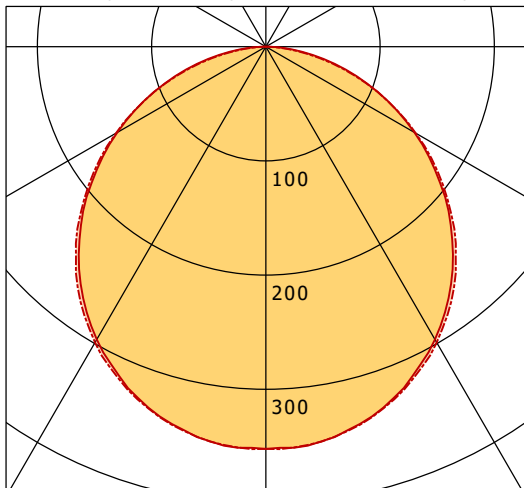

	C0	C90	C180	C270
0°	352	352	352	352
15°	339	339	339	339
30°	296	299	296	299
45°	230	235	230	235
60°	150	151	150	151
75°	67	65	67	65
90°	2	1	2	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

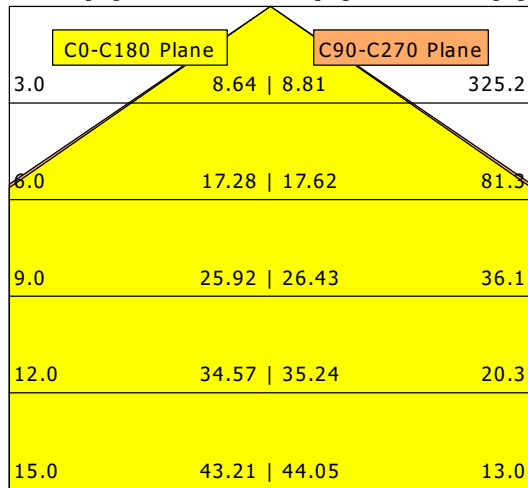

η	LED
Efficiency	92 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	90 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	27.2
UGR C90/C270	27.0
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80