Product No.: 705390-2200

Attention: Standard length of rail is delivered without any pre-drilled holes!

Dimensions in mm and [inch]

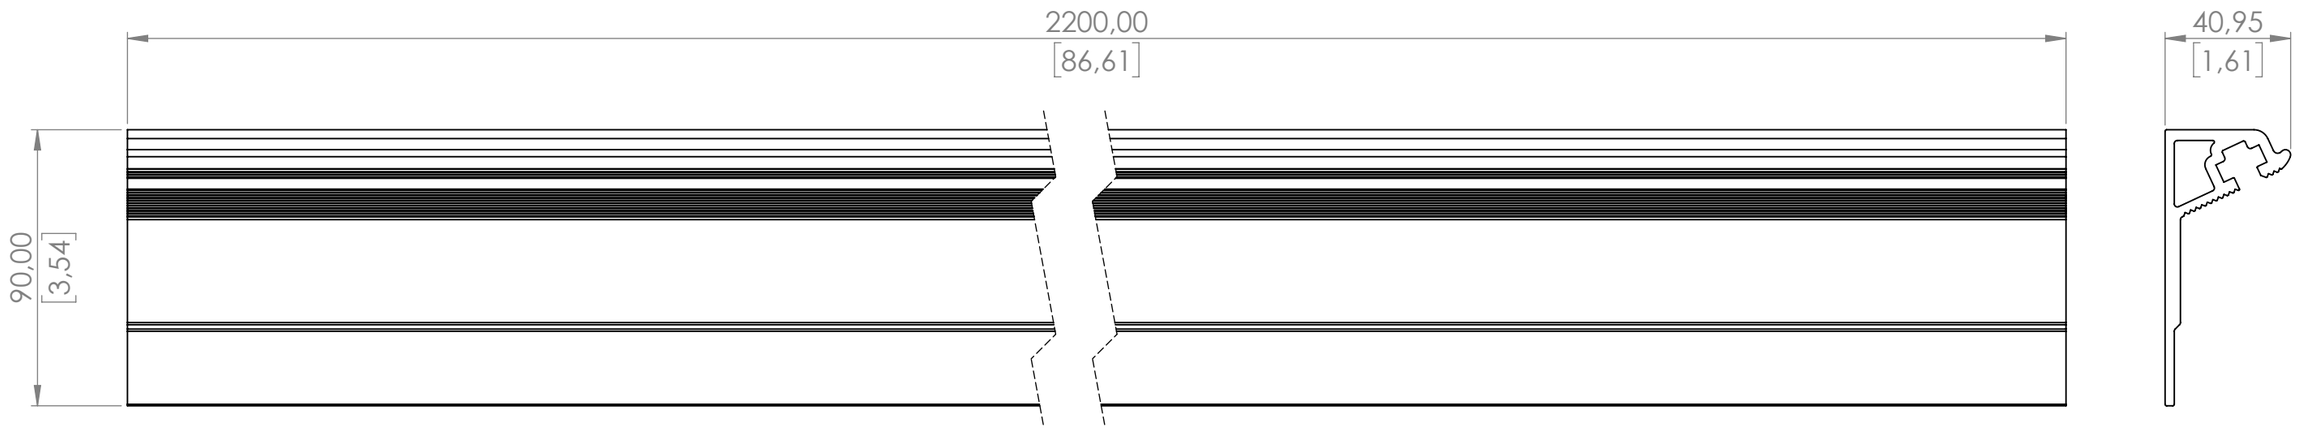

Technical Information:

- Cut the required length of the rail up to a maximum length of 1000mm
- Drill holes according the hole pattern in the drawing
- Fix the ground plate with four Ø6mm or three Ø8mm screws
- Maximum distance between roofhook and rafter is 140mm
- Not useable with Roof hooks: XTS40(CL), XT35(CL)-VLOW & XT40(CL)-Slim-Low

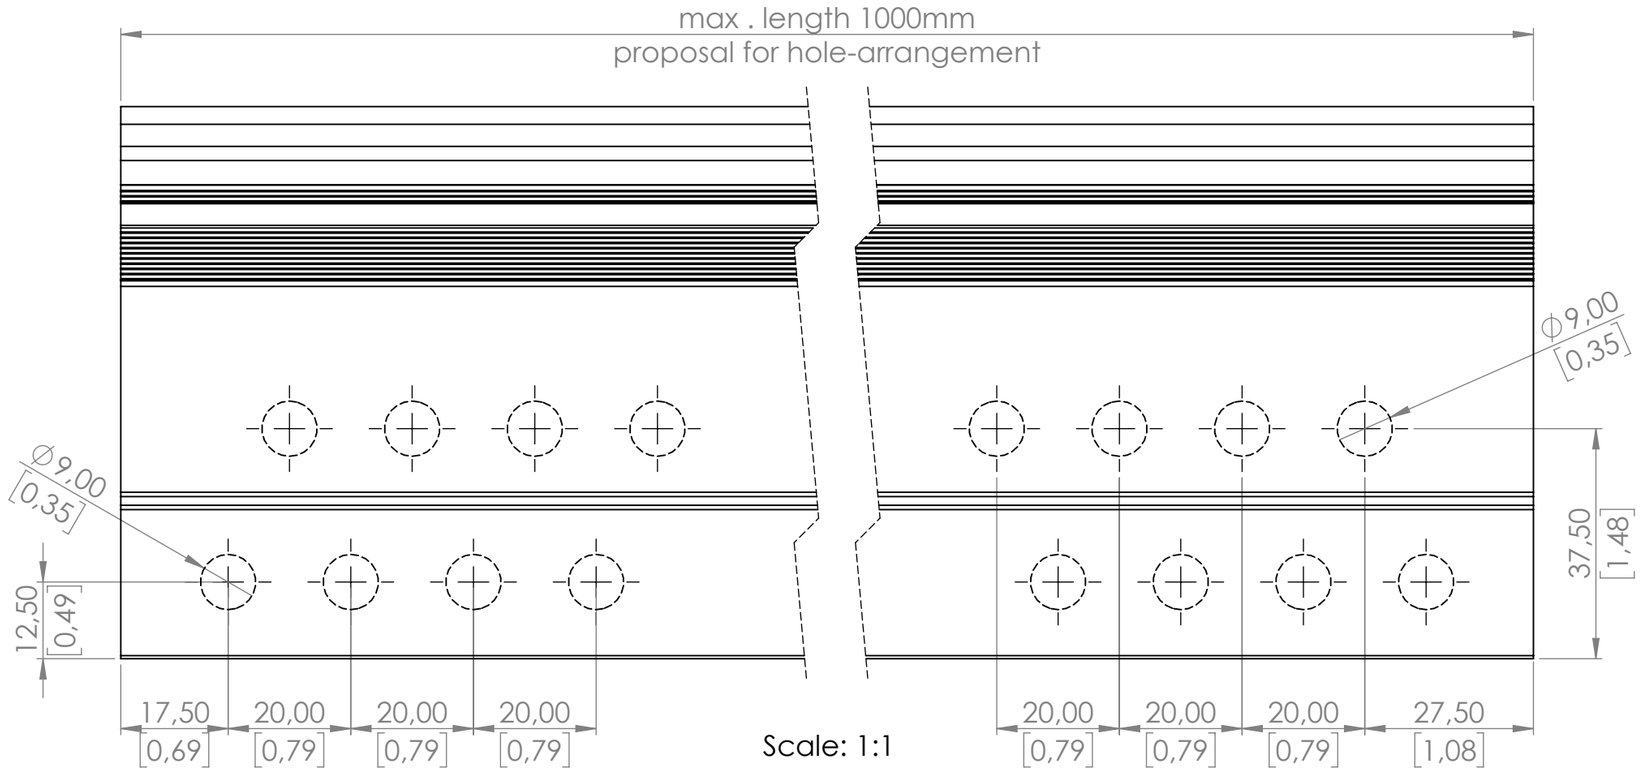

Scale: 1:1



For further information please refer to last valid assembly instruction.

Standard: **EN 1090 EXC1**	Tolerances:		**DIN ISO 128-30**	XXXX Inspection dimensions	Scale: **1:2 1:1**	Weight: **4.00 kg**	
					Material:	EN AW-6063 T66 (HBW 75-80)	
			Date	Name	Title:	XTR-2200 Base plate bridge 2200mm	
			established	10.03.2021	nan		
			approved	12.05.2021	mbu		
			released	12.05.2021	nan		
			AEROCOMPACT® www.aerocompact.com office@aerocompact.com		Drawing No.: 705390-2200	Index: A	Page: 1
A current status		02.03.21	nan				
Modification		Date	Name				**A3**

Für diese Zeichnung behalten wir uns alle Rechte vor, auch für den Fall der Patenterteilung oder Gebrauchsmustereintragung. Ohne unsere vorherige, schriftliche Zustimmung darf diese Zeichnung weder vervielfältigt, noch Dritten zugänglich gemacht werden. Diese Zeichnung darf durch den Empfänger oder Dritte auch nicht in anderer Weise missbräulich verwendet werden. Zuwiderhandlungen verpflichten zu Schadenersatz und können strafrechtliche Folgen haben. We reserve all rights for this drawing also in case of patent or registration of design. This drawing may neither be copied nor opened to a third party in other ways. Contraventions oblige to compensation and can be prosecuted.
Improperly by the recipient or a third party without our written agreement. It may also not be used improperly