



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: <https://www.iqtenet.cn>

No: 01112300005528Y-1(E)
Date: 2024-01-01
Page: 1 of 14

UN38.3 报告

UN38.3 Test Report

样品名称: 锂离子蓄电池

Sample Name: Lithium ion batteries

委托单位: 华为技术有限公司

Applicant: Huawei Technologies Co., Ltd.



W002F2LSBR

广州海关技术中心

GUANGZHOU CUSTOMS DISTRICT TECHNOLOGY CENTER





中国认可
国际互认
检测
TESTING
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 2 of 14

检测证书 TEST REPORT

样品名称 Sample Name	锂离子蓄电池 Lithium ion batteries		
型号 Model	ESM-57280AS1		
委托单位 Applicant	华为技术有限公司 Huawei Technologies Co., Ltd.		
委托单位地址 Applicant Address	广东省深圳市龙岗区坂田华为总部办公楼 Administration Building, Headquarters of Huawei Technologies Co., Ltd.		
生产单位 Manufacture	惠州市欣旺达能源科技有限公司 Huizhou Sunwoda Energy Technology Co., Ltd.		
生产单位地址 Manufacture Address	博罗县园洲镇沥西经济联合社振兴大道“基笃围”(土名地段) "Ji Duwei"(a local area), Zhenxing Avenue, Lixi Economic Union, Yuanzhou Town, Boluo County, Huizhou City		
样品外观与性状 Appearance & Odor	白色金属外壳 White metal shell		
测试方法和判定标准 Test method and criterion	联合国《关于危险货物运输的建议书 试验和标准手册》ST/SG/AC.10/11/Rev.7, 38.3 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS", Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3		
接样时间 Accepted date	2022-01-11	测试日期 Test date	2022-02-14~2022-03-24
测试项目 Test items	高度模拟、温度试验、振动、冲击、外部短路、挤压、过度充电、强制放电。 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge.		
结论 Conclusion	经测试, 该样品符合联合国《关于危险货物运输的建议书 试验和标准手册》ST/SG/AC.10/11/Rev.7, 38.3 标准要求。 The sample has passed the test items of UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS", Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3.		
备注 Remark	1.本报告与 01112200001728-1(E) 报告的样品差异在于: 仅变更样品名称, 无导致任何试验不符合要求的变化。 The differences between this report and the 01112200001728-1(E) report are as follows: The samples are only change in the sample name, and there is no change that would lead to failure of any tests. 2.随附 UN38.3 试验概要(编号: 01112300005528-2(E))。 Attached with UN38.3 test summary (No.: 01112300005528-2(E)).		

批准

Approver:

陆路强

审核

Checker:

邱初瞳

主检

Appraiser:

周伟光

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: <https://www.iqtenet.cn>

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 3 of 14

电池组信息:

The batteries information:

电池类型 Battery type	锂离子电池组 Lithium ion batteries	标称电压 Nominal Voltage	57.6 V
额定容量 Rated Capacity	280Ah	总能量 Total Energy	16.128kWh
充电限制电压 Limited Charge Voltage	63.5V	标准充电电流 Standard Charge Current	280A
最大充电电流 Maximum Charge Current	280A	充电截止电流 Charge Cut-off Current	--
标准放电电流 Standard discharge Current	280A	最大放电电流 Maximum Discharge Current	280A
放电截止电压 Discharge Cut-off Voltage	48.6V	尺寸 Overall Dimensions (W×D×H)	660mm(L)*442mm(W)*307mm(H)
电芯数量 Cell Quantity	18 PCS	重量 Mass	130±3kg
电芯容量 Cell Capacity	280Ah	电芯型号 Cell Model	LF280K
电芯生产单位 Manufacturer of cell	惠州亿纬锂能股份有限公司 EVE Energy Co., Ltd		



地址：中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Address: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 4 of 14

序号 No.	测试项目名称 Name of test	标准要求或标准条款号 Stand requirement or the clause number of standard	测试结果 Test result	本项结论 Test conclusion	备注 Remark
1	高度模拟 Altitude simulation	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.1 Test T.1	见附表 1 Appendix 1	合格 Passed	/
2	温度试验 Thermal test	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.2 Test T.2	见附表 2 Appendix 2	合格 Passed	/
3	振动 Vibration	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.3 Test T.3	见附表 3 Appendix 3	合格 Passed	/
4	冲击 Shock	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.4 Test T.4	见附表 4 Appendix 4	合格 Passed	/
5	外部短路 External short circuit	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.5 Test T.5	见附表 5 Appendix 5	合格 Passed	/
6	挤压 Crush	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.6 Test T.6	见附表 6 Appendix 6	合格 Passed	/
7	过度充电 Overcharge	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.7 Test T.7	见附表 7 Appendix 7	合格 Passed	/
8	强制放电 Forced discharge	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.8 Test T.8	见附表 8 Appendix 8	合格 Passed	/
测试环境 Test environment condition		环境温度: 20°C-25°C; 环境湿度: 45%-75% Ambient temperature: 20°C-25°C, Ambient humidity: 45%-75%			

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



广州海关技术中心

GUANGZHOU CUSTOMS DISTRICT TECHNOLOGY CENTER



中国认可
国际互认
检测
TESTING
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 5 of 14

序号 No.	附表 1 Appendix 1	测试项目名称 Name of test		高度模拟 Altitude simulation			
标准要求 Requirement of Standard	<p>试验电池或电池组在压力等于或低于 11.6kPa 和环境温度 20±5℃ 下存放至少 6h。试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧, 并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的 90% (完全放电状态的试验电池或电池组除外)。</p> <p>Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hours at ambient temperature 20±5℃. Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 m ₁ (kg)	开路电压 v ₁ (V)	电池质量 m ₂ (kg)	开路电压 v ₂ (V)			
b1#	132.25	59.6	132.25	59.6	0.00	100.00	O
b2#	132.28	59.7	132.28	59.7	0.00	100.00	O
b3#	132.24	59.6	132.24	59.6	0.00	100.00	O
b4#	132.25	59.7	132.25	59.7	0.00	100.00	O
<p>注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



地址：中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Address: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 6 of 14

序号 No.	附表 2 Appendix 2	测试项目名称 Name of test		温度试验 Thermal test						
标准要求 Requirement of Standard	<p>试验大型电池或电池组在试验温度等于 $72 \pm 2^\circ\text{C}$ 下存放至少 12h，接着在试验温度等于 $-40 \pm 2^\circ\text{C}$ 下存放至少 12h。两个极端试验温度之间的最大时间间隔为 30min。重复 10 次，再将所有试验电池或电池组在环境温度 $20 \pm 5^\circ\text{C}$ 下存放 24h。试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧，并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的 90%（完全放电状态的试验电池或电池组除外）。</p> <p>Test large cells and batteries are to be stored for at least 12 hours at a test temperature equal to $72 \pm 2^\circ\text{C}$, followed by storage for at least 12 hours at a test temperature equal to $-40 \pm 2^\circ\text{C}$. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated 10 times, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20 \pm 5^\circ\text{C}$). Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>									
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池； b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>									
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result			
	电池质量 $m_1(\text{kg})$	开路电压 $v_1(\text{V})$	电池质量 $m_2(\text{kg})$	开路电压 $v_2(\text{V})$						
b1#	132.25	59.6	132.25	59.4	0.00	99.80	O			
b2#	132.28	59.7	132.28	59.5	0.00	99.80	O			
b3#	132.24	59.6	132.24	59.4	0.00	99.80	O			
b4#	132.25	59.7	132.25	59.5	0.00	100.00	O			
<p>注：L-泄漏； V-排气； D-解体； R-破裂； F-起火； O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>										



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 7 of 14

序号 No.	附表 3 Appendix 3	测试项目名称 Name of test	振动 Vibration				
标准要求 Requirement of Standard	<p>将大型电池或电池组直接安装或通过夹具安装在振动台的台面上,用正弦波,从7Hz开始,保持1g_n的最大加速度,直到18Hz。然后将振幅保持在0.8mm(总偏移1.6mm),并增加频率直到最大加速度达到2g_n(频率约为25Hz)。将最大加速度保持在2g_n直到频率增加到200Hz。对三个互相垂直的电池或电池组安装方向的每个方向重复进行12次,一共振动3h。试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧,并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的90%(完全放电状态的试验电池或电池组除外)。</p> <p>The large Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep from 7Hz to a peak acceleration of 1g_n is maintained until 18Hz is reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of 2g_n occurs (approximately 25Hz). A peak acceleration of 2g_n is then maintained until the frequency is increased to 200Hz. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face. Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 m ₁ (kg)	开路电压 v ₁ (V)	电池质量 m ₂ (kg)	开路电压 v ₂ (V)			
b1#	132.25	59.4	132.25	59.4	0.00	100.00	O
b2#	132.28	59.5	132.28	59.5	0.00	100.00	O
b3#	132.24	59.4	132.24	59.4	0.00	100.00	O
b4#	132.25	59.5	132.25	59.5	0.00	100.00	O
<p>注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 8 of 14

序号 No.	附表 4 Appendix 4	测试项目名称 Name of test	冲击 Shock				
标准要求 Requirement of Standard	<p>将电池或电池组用坚硬支架紧固在试验装置上, 对于大型电池组, 以加速度为 $50g_n$ 或 $g_n = \sqrt{(30000 / mass)}$ 中较小者的正弦波冲击, 脉冲持续时间 11ms, 按三个相互垂直的轴向分别对其正负极各冲击 3 次, 共冲击 18 次。各试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧, 并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的 90% (完全放电状态的试验电池或电池组除外)。</p> <p>Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery. Each Large batteries shall be subjected to a half-sine shock of peak acceleration of $50g_n$ or acceleration ($g_n = \sqrt{(30000 / mass)}$) and pulse duration of 11 milliseconds. Each cell or battery shall be subjected to three shocks in the positive direction followed by three shocks in the negative direction of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks. Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states. (NOTE: Mass is express in kilograms)</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 $m_1(kg)$	开路电压 $v_1(V)$	电池质量 $m_2(kg)$	开路电压 $v_2(V)$			
b1#	132.25	59.4	132.25	59.4	0.00	100.00	O
b2#	132.28	59.5	132.28	59.5	0.00	100.00	O
b3#	132.24	59.4	132.24	59.4	0.00	100.00	O
b4#	132.25	59.5	132.25	59.5	0.00	100.00	O
<p>注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							



广州海关技术中心

GUANGZHOU CUSTOMS DISTRICT TECHNOLOGY CENTER



中国认可
国际互认
检测
TESTING
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 9 of 14

序号 No.	附表 5 Appendix 5	测试项目名称 Name of test	外部短路 External short circuit
标准要求 Requirement of Standard	<p>待试验电池或电池组的外壳温度稳定在 $57\pm4^{\circ}\text{C}$ 后, 在 $57\pm4^{\circ}\text{C}$ 下使电池或电池组经受总外电阻小于 0.1Ω 的短路条件, 当电池或电池组外壳温度回到 $57\pm4^{\circ}\text{C}$ 后继续至少 1h, 然后短路断开, 再观察电池或电池组 6h 才结束试验。电池或电池组的外壳温度应不超过 170°C, 并且试验后 6h 内应无解体、无破裂和无燃烧。</p> <p>The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches $57\pm4^{\circ}\text{C}$ and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at $57\pm4^{\circ}\text{C}$. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57\pm4^{\circ}\text{C}$. The cell or battery must be observed for a further six hours for the test to be concluded. Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire within six hours of this test.</p>		
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>		
样品编号 Sample No.	样品表面最高温度 Max External Temperature($^{\circ}\text{C}$)	测试结果 Test result	备注 Remark
b1#	57.1	O	/
b2#	58.2	O	/
b3#	59.6	O	/
b4#	59.4	O	/
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly, No Rupture & No Fire.</p>			

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Address: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 10 of 14

序号 No.	附表 6 Appendix 6	测试项目名称 Name of test	挤压 Crush				
标准要求 Requirement of Standard	<p>(适用于棱柱形、袋装、硬币/纽扣电池和直径小于 18mm 的圆柱形电池): 将电池或元件电池放在两个平面之间挤压, 挤压力度逐渐加大, 在第一个接触点上的速度大约为 1.5cm/s。挤压持续进行, 直到出现以下三种情况之一即解除压力: (a)施加的力量达到 13kN±0.78kN; (b)电池的电压下降至少 100 毫伏; 或 (c)电池变形量达原始厚度的 50% 或以上。 棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币电池应从其平坦表面施压。圆柱形电池应与纵轴垂直的方向施压。每个电池只做一次挤压试验。 试验电池或电池组的组成电芯外部温度不超过 170℃, 并且在试验过程中和试验后 6 小时内应无解体、无破裂、无起火。 Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells not more than 18 in diameter): A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached. (a)The applied force reaches 13kN±0.78kN; (b)The voltage of the cell drops by at least 100mV;or (c)The cell is deformed by 50% or more of its original thickness. Once the maximum pressure has been obtained, the voltage drops by at least 100mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released. Each test cell or component cell is to be subjected to one crush only. Cells and component cells meet this requirement if their external temperature does not exceed 170℃ and there is no disassembly and no fire during the test and within six hours after this test.</p>						
样品状态 Sample status	<p>C1#~C5#: 第一个循环 50% 的额定容量的电芯。 C1#~C5#: first cycle at 50% of the design rated capacity of cell. C6#~C10#: 第二十五个循环 50% 的额定容量的电芯。 C6#~C10#: after 25 cycles at 50% of the design rated capacity of cell.</p>						
样品编号 Sample No.	样品表面最高温度 Max External Temperature(°C)	测试结果 Test result	备注 Remark	样品编号 Sample No.	样品表面最高温度 Max External Temperature(°C)	测试结果 Test result	备注 Remark
C1#	23.1	O	/	C6#	23.3	O	/
C2#	24.3	O	/	C7#	23.3	O	/
C3#	23.5	O	/	C8#	23.5	O	/
C4#	23.8	O	/	C9#	23.6	O	/
C5#	23.3	O	/	C10#	23.8	O	/
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly, No Rupture & No Fire.</p>							

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



广州海关技术中心

GUANGZHOU CUSTOMS DISTRICT TECHNOLOGY CENTER



中国认可
国际互认
检测
TESTING
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 11 of 14

序号 No.	附表 7 Appendix 7	测试项目名称 Name of test	过度充电 Overcharge
标准要求 Requirement of Standard	<p>充电电流必须是制造商建议的最大连续充电电流的两倍, 试验的最小电压应为如下:</p> <p>(a) 制造商建议的充电电压不大于 18V 时, 试验的最小电压应是电池组最大充电电压的两倍或 132V 两者中的较少者。</p> <p>(b) 制造商建议的充电电压大于 18V 时, 试验的最小电压应是最大充电电压的 1.2 倍。</p> <p>可再充电电池组在环境温度下试验 24h。试样在试验后 7 天内应无解体和无燃烧。</p> <p>The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:</p> <p>(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 132V.</p> <p>(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.</p> <p>Tests are to be conducted at ambient temperature. The duration of the test shall be 24 hours. Rechargeable batteries meet this requirement if there is no disassembly and no fire within seven days of the test.</p>		
样品状态 Sample status	<p>b5#~b6#: 第一个循环完全充电的电池;</p> <p>b5#~b6#: first cycle in fully charged states;</p> <p>b7#~b8#: 第二十五个循环完全充电的电池。</p> <p>b7#~b8#: after 25 cycles ending in fully charged states.</p>		
样品编号 Sample No.	测试结果 Test result	备注 Remark	
b5#	O	/	
b6#	O	/	
b7#	O	/	
b8#	O	/	
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。</p> <p>Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly. No Rupture & No Fire.</p>			

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



广州海关技术中心

GUANGZHOU CUSTOMS DISTRICT TECHNOLOGY CENTER



中国认可
国际互认
检测
TESTING
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 12 of 14

序号 No.	附表 8 Appendix 8	测试项目名称 Name of test	强制放电 Forced discharge		
标准要求 Requirement of Standard	<p>试验原电池或可再充电电池在环境温度下与 12V 的直流电源串联, 在起始电流等于制造商给定的最大放电电流的条件下强制放电。原电池或可再充电电池在试验后 7 天内应无解体和无燃烧。</p> <p>Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in Ampere). Primary or rechargeable cells meet this requirement if there is no disassembly and no fire within seven days of the test.</p>				
样品状态 Sample status	<p>C11#~C20#: 第一个循环完全放电的电芯; C11#~C20#: first cycle in fully discharged states; C21#~C30#: 第二十五个循环完全放电的电芯。 C21#~C30#: after 25 cycles in fully discharged states.</p>				
样品编号 Sample No.	测试结果 Test result	备注 Remark	样品编号 Sample No.	测试结果 Test result	备注 Remark
C11#	O	/	C21#	O	/
C12#	O	/	C132#	O	/
C13#	O	/	C23#	O	/
C14#	O	/	C24#	O	/
C15#	O	/	C25#	O	/
C16#	O	/	C26#	O	/
C17#	O	/	C27#	O	/
C18#	O	/	C28#	O	/
C19#	O	/	C29#	O	/
C20#	O	/	C30#	O	/
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly, No Rupture & No Fire.</p>					

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005528Y-1(E)

Date: 2024-01-01

Page: 13 of 14

样品图片

Photo of the sample


电池正面外观
Battery front appearance



电池侧面外观
Battery side appearance



电池侧面外观
Battery side appearance

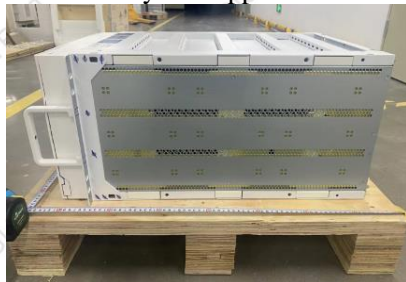

电池侧面外观
Battery side appearance



电池铭牌(含 Wh) Battery nameplate (With Wh)




型号 Model: ESM-57280AS1
名称 Name: 智能储能电池模组
Energy Storage Module

额定电压 Rated Voltage: \approx 57.6 V
充放电电流 Charging/Discharging Current: \approx 280 A Max
标称能量 Nominal Energy Capacity: 16.128 kWh
可充式锂离子电池 Rechargeable Lithium Ion Battery
注意 Caution: 禁止拆卸 Do not Disassemble the Battery
禁止靠近火源 Keep the Battery away from Fire
最高存储温度 Highest Storing Temperature: 60 °C



华为技术有限公司 HUAWEI TECHNOLOGIES CO., LTD. 中国制造 MADE IN CHINA
HQ of Huawei, Bantian, Longgang District, Shenzhen, 518129, P.R.C

电芯
Cell



电芯标签
Cell label





地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppdc@iqtcnet.cn 网址Website: <https://www.iqtcnet.cn>

No: 01112300005528Y-1(E)
Date: 2024-01-01
Page: 14 of 14

声 明 Statement

1. 本报告无检测单位公章无效。

The test report is invalid without the official stamp of IQTC.

2. 本报告无批准人、审核人及主检人签名无效。

The test report is invalid without the signatures of Approver, Checker and Appraiser.

3. 本报告涂改无效。未经本实验室书面同意, 不得部分地复制本报告。

The test report is invalid if altered. Nobody is allowed to photocopy or partly photocopy this report without written permission of IQTC.

4. 客户必须如实提供样品及资料, 并保证申报品名和样品以及运输货物相同, 否则本检测单位不承担任何相关责任。

The client should provide samples and relevant data, at the same time, they should guarantee the consistence of the product's name they declared, the samples they provided and the goods to be transported. Otherwise we will not bear any relevant responsibilities.

5. 对检测报告若有异议, 应于收到报告之日起十五天内向检测单位提出。

Objection to the test report must be submitted to IQTC within 15 days

6. 本报告仅对送检样品负责。

The test report is valid for the tested samples only.

7. 检测地址: 广东省广州市科学城南翔支路1号C102房(汽车与装备检测研究所科学城)

Test Address: Room C102, No.1 Nanxiangzhi Road, Science City, Guangzhou, Guangdong, China
(Institute of Automobile and Equipment Testing in Science City)

电话(Tel): 020-38669019-811

电子邮箱(E-mail): battery@iqtcnet.cn

* * * * 报告结束 End of report * * * *



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: <https://www.iqtenet.cn>

No: 01112300005527Y-1(E)
Date: 2024-01-01
Page: 1 of 14

UN38.3 报告

UN38.3 Test Report

样品名称: 锂离子蓄电池

Sample Name: Lithium ion batteries

委托单位: 华为技术有限公司

Applicant: Huawei Technologies Co., Ltd.



广州海关技术中心
检验检测专用章

GUANGZHOU CUSTOMS DISTRICT TECHNOLOGY CENTER

SSUWH38VET



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)
Date: 2024-01-01
Page: 2 of 14

检测证书 TEST REPORT

样品名称 Sample Name	锂离子蓄电池 Lithium ion batteries		
型号 Model	ESM-57280AS1		
委托单位 Applicant	华为技术有限公司 Huawei Technologies Co., Ltd.		
委托单位地址 Applicant Address	广东省深圳市龙岗区坂田华为总部办公楼 Administration Building, Headquarters of Huawei Technologies Co., Ltd.		
生产单位 Manufacture	比亚迪精密制造有限公司 BYD Precision Manufacture Co., Ltd.		
生产单位地址 Manufacture Address	深圳市大鹏新区葵涌街道办延安路1号 NO.1 Yanan Road Kuichong Street, Dapeng Shenzhen, P.R. China		
样品外观与性状 Appearance & Odor	白色金属外壳 White metal shell		
测试方法和判定标准 Test method and criterion	联合国《关于危险货物运输的建议书 试验和标准手册》ST/SG/AC.10/11/Rev.7, 38.3 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS", Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3		
接样时间 Accepted date	2022-01-11	测试日期 Test date	2022-01-11~2022-03-17
测试项目 Test items	高度模拟、温度试验、振动、冲击、外部短路、挤压、过度充电、强制放电。 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge.		
结论 Conclusion	经测试, 该样品符合联合国《关于危险货物运输的建议书 试验和标准手册》 ST/SG/AC.10/11/Rev.7, 38.3 标准要求。 The sample has passed the test items of UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS", Manual of Test and Criteria ST/SG/AC.10/11/Rev.7, 38.3.		
备注 Remark	1.本报告与 01112200001727-1(E) 报告的样品差异在于: 仅变更样品名称, 无导致任何试 验不符合要求的变化。 The differences between this report and the 01112200001727-1(E) report are as follows: The samples are only change in the sample name, and there is no change that would lead to failure of any tests. 2.随附 UN38.3 试验概要 (编号: 01112300005527-2(E))。 Attached with UN38.3 test summary (No.: 01112300005527-2(E)).		



批准 Approver: 陆玲强 审核 Checker: 叶中轩 主检 Appraiser: 周伟光

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.
2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.

地址：中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppde@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 3 of 14

电池组信息:

The batteries information:

电池类型 Battery type	锂离子电池组 Lithium ion batteries	标称电压 Nominal Voltage	57.6 V
额定容量 Rated Capacity	280Ah	总能量 Total Energy	16.128kWh
充电限制电压 Limited Charge Voltage	63.5V	标准充电电流 Standard Charge Current	280A
最大充电电流 Maximum Charge Current	280A	充电截止电流 Charge Cut-off Current	--
标准放电电流 Standard discharge Current	280A	最大放电电流 Maximum Discharge Current	280A
放电截止电压 Discharge Cut-off Voltage	48.6V	尺寸 Overall Dimensions (W×D×H)	660mm(L)*442mm(W)*307mm(H)
电芯数量 Cell Quantity	18 PCS	重量 Mass	130±3kg
电芯容量 Cell Capacity	280Ah	电芯型号 Cell Model	LF280K
电芯生产单位 Manufacturer of cell	惠州亿纬锂能股份有限公司 EVE Energy Co., Ltd		



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Address: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppde@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 4 of 14

序号 No.	测试项目名称 Name of test	标准要求或标准条款号 Stand requirement or the clause number of standard	测试结果 Test result	本项结论 Test conclusion	备注 Remark
1	高度模拟 Altitude simulation	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.1 Test T.1	见附表 1 Appendix 1	合格 Passed	/
2	温度试验 Thermal test	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.2 Test T.2	见附表 2 Appendix 2	合格 Passed	/
3	振动 Vibration	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.3 Test T.3	见附表 3 Appendix 3	合格 Passed	/
4	冲击 Shock	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.4 Test T.4	见附表 4 Appendix 4	合格 Passed	/
5	外部短路 External short circuit	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.5 Test T.5	见附表 5 Appendix 5	合格 Passed	/
6	挤压 Crush	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.6 Test T.6	见附表 6 Appendix 6	合格 Passed	/
7	过度充电 Overcharge	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.7 Test T.7	见附表 7 Appendix 7	合格 Passed	/
8	强制放电 Forced discharge	联合国《关于危险货物运输的建议书 试验和标准手册》UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, 38.3 试验 T.8 Test T.8	见附表 8 Appendix 8	合格 Passed	/
测试环境 Test environment condition		环境温度: 20°C-25°C; 环境湿度: 45%-75% Ambient temperature: 20°C-25°C, Ambient humidity: 45%-75%			

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.

地址：中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppde@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 5 of 14

序号 No.	附表 1 Appendix 1		测试项目名称 Name of test		高度模拟 Altitude simulation		
标准要求 Requirement of Standard	<p>试验电池或电池组在压力等于或低于 11.6kPa 和环境温度 20±5℃ 下存放至少 6h。试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧，并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的 90%（完全放电状态的试验电池或电池组除外）。</p> <p>Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hours at ambient temperature 20±5℃. Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池； b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 m ₁ (kg)	开路电压 v ₁ (V)	电池质量 m ₂ (kg)	开路电压 v ₂ (V)			
b1#	132.142	60.5	132.142	60.5	0.00	100.00	O
b2#	132.136	60.2	132.136	60.2	0.00	100.00	O
b3#	132.138	60.6	132.138	60.6	0.00	100.00	O
b4#	132.130	60.5	132.130	60.5	0.00	100.00	O
<p>注：L-泄漏； V-排气； D-解体； R-破裂； F-起火； O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 6 of 14

序号 No.	附表 2 Appendix 2	测试项目名称 Name of test		温度试验 Thermal test			
标准要求 Requirement of Standard	<p>试验大型电池或电池组在试验温度等于 $72\pm 2^{\circ}\text{C}$ 下存放至少 12h, 接着在试验温度等于 $-40\pm 2^{\circ}\text{C}$ 下存放至少 12h。两个极端试验温度之间的最大时间间隔为 30min。重复 10 次, 再将所有试验电池或电池组在环境温度 $20\pm 5^{\circ}\text{C}$ 下存放 24h。试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧, 并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的 90% (完全放电状态的试验电池或电池组除外)。</p> <p>Test large cells and batteries are to be stored for at least 12 hours at a test temperature equal to $72\pm 2^{\circ}\text{C}$, followed by storage for at least 12 hours at a test temperature equal to $-40\pm 2^{\circ}\text{C}$. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated 10 times, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20\pm 5^{\circ}\text{C}$). Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 $m_1(\text{kg})$	开路电压 $v_1(\text{V})$	电池质量 $m_2(\text{kg})$	开路电压 $v_2(\text{V})$			
b1#	132.142	60.5	132.140	60.1	0.00	99.34	O
b2#	132.136	60.2	132.132	60.0	0.00	99.67	O
b3#	132.138	60.6	132.130	60.2	0.01	99.34	O
b4#	132.130	60.5	132.128	60.4	0.00	99.83	O
<p>注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppde@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 7 of 14

序号 No.	附表 3 Appendix 3	测试项目名称 Name of test		振动 Vibration			
标准要求 Requirement of Standard	<p>将大型电池或电池组直接安装或通过夹具安装在振动台的台面上,用正弦波,从7Hz开始,保持$1g_n$的最大加速度,直到18Hz。然后将振幅保持在0.8mm(总偏移1.6mm),并增加频率直到最大加速度达到$2g_n$(频率约为25Hz),将最大加速度保持在$2g_n$直到频率增加到200Hz。对三个互相垂直的电池或电池组安装方向的每个方向重复进行12次,一共振动3h。试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧,并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的90%(完全放电状态的试验电池或电池组除外)。</p> <p>The large Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep from 7Hz to a peak acceleration of $1g_n$ is maintained until 18Hz is reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of $2g_n$ occurs (approximately 25Hz). A peak acceleration of $2g_n$ is then maintained until the frequency is increased to 200Hz. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face. Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 m_1 (kg)	开路电压 v_1 (V)	电池质量 m_2 (kg)	开路电压 v_2 (V)			
b1#	132.140	60.1	132.136	60.1	0.00	100.00	O
b2#	132.132	60.0	132.130	60.0	0.00	100.00	O
b3#	132.130	60.2	132.130	60.1	0.00	99.83	O
b4#	132.128	60.4	132.124	60.4	0.00	100.00	O
<p>注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意,不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
 Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
 电话Tel: 020-22131000 邮箱Email: ppde@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 8 of 14

序号 No.	附表 4 Appendix 4		测试项目名称 Name of test		冲击 Shock		
标准要求 Requirement of Standard	<p>将电池或电池组用坚硬支架紧固在试验装置上, 对于大型电池组, 以加速度为 $50g_n$ 或 $g_n = \sqrt{(30000 / mass)}$ 中较小者的正弦波冲击, 脉冲持续时间 11ms, 按三个相互垂直的轴向分别对其正负极各冲击 3 次, 共冲击 18 次。各试验电池或电池组应无重量损失、无渗漏、无排气、无解体、无破裂和无燃烧, 并且每个试验电池或电池组在试验后的开路电压不少于其在进行这一试验前电压的 90% (完全放电状态的试验电池或电池组除外)。</p> <p>Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery. Each Large batteries shall be subjected to a half-sine shock of peak acceleration of $50g_n$ or acceleration ($g_n = \sqrt{(30000 / mass)}$) and pulse duration of 11 milliseconds. Each cell or battery shall be subjected to three shocks in the positive direction followed by three shocks in the negative direction of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks. Cells and batteries meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states. (NOTE: Mass is express in kilograms)</p>						
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>						
样品编号 Sample No.	测试前 Before		测试后 After		质量损失 Mass loss (%)	剩余电压 Residual OCV(%)	测试结果 Test result
	电池质量 m_1 (kg)	开路电压 v_1 (V)	电池质量 m_2 (kg)	开路电压 v_2 (V)			
b1#	132.136	60.1	132.136	60.1	0.00	100.00	O
b2#	132.130	60.0	132.130	60.0	0.00	100.00	O
b3#	132.130	60.1	132.130	60.1	0.00	100.00	O
b4#	132.124	60.4	132.124	60.4	0.00	100.00	O
<p>注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏、无排气、无解体、无破裂、无起火。 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No Leakage, No Venting, No Disassembly, No Rupture & No Fire.</p>							



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppde@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 9 of 14

序号 No.	附表 5 Appendix 5	测试项目名称 Name of test	外部短路 External short circuit
标准要求 Requirement of Standard	<p>待试验电池或电池组的外壳温度稳定在 $57\pm 4^{\circ}\text{C}$ 后, 在 $57\pm 4^{\circ}\text{C}$ 下使电池或电池组经受总外电阻小于 0.1Ω 的短路条件, 当电池或电池组外壳温度回到 $57\pm 4^{\circ}\text{C}$ 后继续至少 1h, 然后短路断开, 再观察电池或电池组 6h 才结束试验。电池或电池组的外壳温度应不超过 170°C, 并且试验后 6h 内应无解体、无破裂和无燃烧。</p> <p>The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches $57\pm 4^{\circ}\text{C}$ and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at $57\pm 4^{\circ}\text{C}$. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57\pm 4^{\circ}\text{C}$. The cell or battery must be observed for a further six hours for the test to be concluded. Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire within six hours of this test.</p>		
样品状态 Sample status	<p>b1#~b2#: 第一个循环完全充电的电池; b1#~b2#: first cycle in fully charged states; b3#~b4#: 第二十五个循环完全充电的电池。 b3#~b4#: after 25 cycles ending in fully charged states.</p>		
样品编号 Sample No.	样品表面最高温度 Max External Temperature($^{\circ}\text{C}$)	测试结果 Test result	备注 Remark
b1#	60.7	O	/
b2#	59.6	O	/
b3#	60.1	O	/
b4#	58.9	O	/
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly, No Rupture & No Fire.</p>			

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
 Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
 电话Tel: 020-22131000 邮箱Email: ppde@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005527Y-1(E)
 Date: 2024-01-01
 Page: 10 of 14

序号 No.	附表 6 Appendix 6	测试项目名称 Name of test			挤压 Crush		
标准要求 Requirement of Standard	<p>(适用于棱柱形、袋装、硬币/纽扣电池和直径小于 18mm 的圆柱形电池): 将电池或元件电池放在两个平面之间挤压, 挤压力度逐渐加大, 在第一个接触点上的速度大约为 1.5cm/s。挤压持续进行, 直到出现以下三种情况之一即解除压力: (a)施加的力量达到 13kN±0.78kN; (b)电池的电压下降至少 100 毫伏; 或 (c)电池变形量达原始厚度的 50% 或以上。 棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币电池应从其平坦表面施压。圆柱形电池应与纵轴垂直的方向施压。每个电池只做一次挤压试验。 试验电池或电池组的组成电芯外部温度不超过 170℃, 并且在试验过程中和试验后 6 小时内应无解体、无破裂、无起火。 Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells not more than 18 in diameter): A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached. (a)The applied force reaches 13kN±0.78kN; (b)The voltage of the cell drops by at least 100mV;or (c)The cell is deformed by 50% or more of its original thickness. Once the maximum pressure has been obtained, the voltage drops by at least 100mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released. Each test cell or component cell is to be subjected to one crush only. Cells and component cells meet this requirement if their external temperature does not exceed 170℃ and there is no disassembly and no fire during the test and within six hours after this test.</p>						
样品状态 Sample status	<p>C1#~C5#: 第一个循环 50% 的额定容量的电芯。 C1#~C5#: first cycle at 50% of the design rated capacity of cell. C6#~C10#: 第二十五个循环 50% 的额定容量的电芯。 C6#~C10#: after 25 cycles at 50% of the design rated capacity of cell.</p>						
样品编号 Sample No.	样品表面最高温度 Max External Temperature(°C)	测试结果 Test result	备注 Remark	样品编号 Sample No.	样品表面最高温度 Max External Temperature(°C)	测试结果 Test result	备注 Remark
C1#	23.1	O	/	C6#	23.3	O	/
C2#	24.3	O	/	C7#	23.3	O	/
C3#	23.5	O	/	C8#	23.5	O	/
C4#	23.8	O	/	C9#	23.6	O	/
C5#	23.3	O	/	C10#	23.8	O	/
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly, No Rupture & No Fire.</p>							



中国认可
国际互认
检测
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)
Date: 2024-01-01
Page: 11 of 14

序号 No.	附表 7 Appendix 7	测试项目名称 Name of test	过度充电 Overcharge
标准要求 Requirement of Standard	<p>充电电流必须是制造商建议的最大连续充电电流的两倍, 试验的最小电压应为如下:</p> <p>(a) 制造商建议的充电电压不大于 18V 时, 试验的最小电压应是电池组最大充电电压的两倍或 132V 两者中的较少者。</p> <p>(b) 制造商建议的充电电压大于 18V 时, 试验的最小电压应是最大充电电压的 1.2 倍。</p> <p>可再充电电池组在环境温度下试验 24h。试样在试验后 7 天内应无解体和无燃烧。</p> <p>The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:</p> <p>(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 132V.</p> <p>(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.</p> <p>Tests are to be conducted at ambient temperature. The duration of the test shall be 24 hours. Rechargeable batteries meet this requirement if there is no disassembly and no fire within seven days of the test.</p>		
样品状态 Sample status	<p>b5#~b6#: 第一个循环完全充电的电池; b5#~b6#: first cycle in fully charged states; b7#~b8#: 第二十五个循环完全充电的电池。 b7#~b8#: after 25 cycles ending in fully charged states.</p>		
样品编号 Sample No.	测试结果 Test result	备注 Remark	
b5#	O	/	
b6#	O	/	
b7#	O	/	
b8#	O	/	
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly. No Rupture & No Fire.</p>			



中国认可
国际互认
检测
CNAS L2322

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)
Date: 2024-01-01
Page: 12 of 14

序号 No.	附表 8 Appendix 8	测试项目名称 Name of test	强制放电 Forced discharge		
标准要求 Requirement of Standard	<p>试验原电池或可再充电电池在环境温度下与 12V 的直流电源串联, 在起始电流等于制造商给定的最大放电电流的条件下强制放电。原电池或可再充电电池在试验后 7 天内应无解体和无燃烧。</p> <p>Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in Ampere). Primary or rechargeable cells meet this requirement if there is no disassembly and no fire within seven days of the test.</p>				
样品状态 Sample status	<p>C11#~C20#: 第一个循环完全放电的电芯; C11#~C20#: first cycle in fully discharged states; C21#~C30#: 第二十五个循环完全放电的电芯。 C21#~C30#: after 25 cycles in fully discharged states.</p>				
样品编号 Sample No.	测试结果 Test result	备注 Remark	样品编号 Sample No.	测试结果 Test result	备注 Remark
C11#	O	/	C21#	O	/
C12#	O	/	C132#	O	/
C13#	O	/	C23#	O	/
C14#	O	/	C24#	O	/
C15#	O	/	C25#	O	/
C16#	O	/	C26#	O	/
C17#	O	/	C27#	O	/
C18#	O	/	C28#	O	/
C19#	O	/	C29#	O	/
C20#	O	/	C30#	O	/
<p>注: D-解体; R-破裂; F-起火; O-无解体、无破裂、无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O-No Disassembly, No Rupture & No Fire.</p>					

1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.
2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.

地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623

Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.

电话Tel: 020-22131000 邮箱Email: ppdc@iqtenet.cn 网址Website: https://www.iqtenet.cn

No: 01112300005527Y-1(E)

Date: 2024-01-01

Page: 13 of 14

样品图片

Photo of the sample


电池正面外观

Battery front appearance




电池侧面外观

Battery side appearance

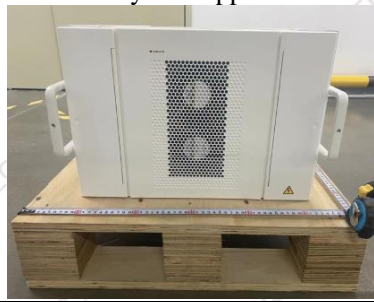

电池侧面外观

Battery side appearance

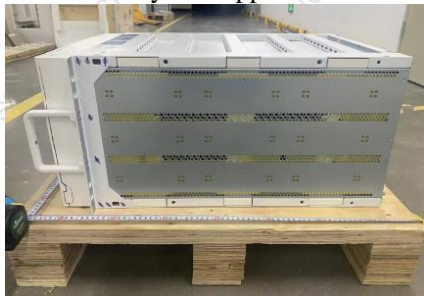

电池侧面外观

Battery side appearance



电池铭牌(含 Wh)

Battery nameplate (With Wh)



型号 Model: ESM-57280AS1

名称 Name: 智能储能电池模组

Energy Storage Module


额定电压 Rated Voltage: ≈ 57.6 V
充电/放电电流 Charging/Discharging Current: ≈ 280 A Max
标称容量 Nominal Energy Capacity: 16.128 kWh
可充电锂离子电池 Rechargeable Lithium Ion Battery
注意 Caution: 禁止拆卸 Do not Disassemble the Battery
禁止靠近火源 Keep the Battery away from Fire
最高存储温度 Highest Storing Temperature: 50 °C



华为技术有限公司 HUAWEI TECHNOLOGIES CO., LTD. 中国制造 MADE IN CHINA
HQ of Huawei, Bantian, Longgang District, Shenzhen, 518129, P.R.C

电芯

Cell

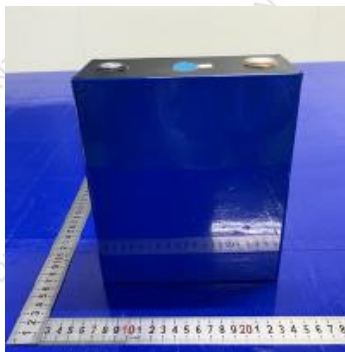

电芯标签

Cell label



1. 本报告结果仅对测试样品负责。The results in this report are relevant only to the sample(s) tested.

2. 未经签发机构书面同意, 不得部分引述或复制本报告。Without written permission of IQTC, this report shall not be quoted or reproduced except in full.



地址: 中国广东省广州市天河区珠江新城花城大道66号B座 邮编Postcode: 510623
Add.: Tower B, No.66 Huacheng Avenue, Zhujiang Xincheng, Tianhe District, Guangzhou, Guangdong, P.R.C.
电话Tel: 020-22131000 邮箱Email: ppde@iqtcnet.cn 网址Website: https://www.iqtcnet.cn

No: 01112300005527Y-1(E)
Date: 2024-01-01
Page: 14 of 14

声 明 Statement

1. 本报告无检测单位公章无效。

The test report is invalid without the official stamp of IQTC.

2. 本报告无批准人、审核人及主检人签名无效。

The test report is invalid without the signatures of Approver, Checker and Appraiser.

3. 本报告涂改无效。未经本实验室书面同意, 不得部分地复制本报告。

The test report is invalid if altered. Nobody is allowed to photocopy or partly photocopy this report without written permission of IQTC.

4. 客户必须如实提供样品及资料, 并保证申报品名和样品以及运输货物相同, 否则本检测单位不承担任何相关责任。

The client should provide samples and relevant data, at the same time, they should guarantee the consistence of the product's name they declared, the samples they provided and the goods to be transported. Otherwise we will not bear any relevant responsibilities.

5. 对检测报告若有异议, 应于收到报告之日起十五天内向检测单位提出。

Objection to the test report must be submitted to IQTC within 15 days

6. 本报告仅对送检样品负责。

The test report is valid for the tested samples only.

7. 检测地址: 广东省广州市科学城南翔支路1号C102房(汽车与装备检测研究所科学城)

Test Address: Room C102, No.1 Nanxiangzhi Road, Science City, Guangzhou, Guangdong, China
(Institute of Automobile and Equipment Testing in Science City)

电话(Tel): 020-38669019-811

电子邮箱(E-mail): battery@iqtcnet.cn

* * * * 报告结束 End of report * * * *