


Quetschkabelschuhe 10 – 70 mm² DIN 46234

Werkstoff: Cu-HCP

Oberfläche: galvanisch verzinkt

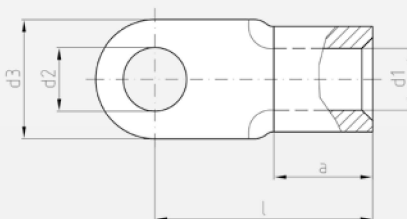

* nicht genormt

Querschnitt mm ²	Bohrung M	Bestell- Nummer	Maße in mm					Gewicht 100 Stk./kg	Verpackungs- Einheit (Stk.)	Werkzeuge hierzu
			d1	d2	d3	l	a			
10	4*	41039	4,5	4,3	10	16	8	0,23	100	WZ 1 126, WZ 12 122 WZ 20 129 WZ 36 128 DP 6/95 155, AP 10 158, HPW 10 + HHW 10 159 APW 20 + Stilo 20 162, HPW 20 + HHW 20 163, APW 30 + HHW 30 + HPW 17 166
	5	41040		5,3	10	16		0,22	100	
	6	41041		6,5	11	17		0,24	100	
	8	41042		8,4	14	20		0,29	100	
	10	41043		10,5	18	21		0,35	100	
	12	41044		13	22	23		0,41	100	
16	5	41045	5,8	5,3	11	20	10	0,40	100	
	6	41046		6,5	11	20		0,38	100	
	8	41047		8,4	14	22		0,42	100	
	10	41048		10,5	18	24		0,50	100	
	12	41049		13	22	26		0,58	100	
25	5	41050	7,5	5,3	12	25	11	0,70	50	
	6	41051		6,5	12	25		0,71	50	
	8	41052		8,4	16	25		0,76	50	
	10	41053		10,5	18	26		0,78	50	
	12	41054		13	22	31		0,97	50	
	16	41096		17	28	35		1,20	50	
35	6	41055	9	6,5	15	26	12	0,97	50	
	8	41056		8,4	16	26		0,96	50	
	10	41057		10,5	18	27		1,02	50	
	12	41058		13	22	31		1,17	50	
	16	41059		17	28	36		1,41	50	
	20*	41098		21	30	37,5	14	1,67	50	
50	6	41097	11	6,5	18	34	16	1,75	50	
	8	41060		8,4	18	34		1,72	50	
	10	41061		10,5	18	34		1,66	50	
	12	41062		13	22	36		1,80	50	
	16	41063		17	28	40		2,11	50	
	20*	41099		21	32	41,2	18	2,57	50	
70	6	41064	13	6,5	22	38	18	2,66	50	
	8	41065		8,4	22	38		2,61	50	
	10	41066		10,5	22	38		2,58	50	
	12	41067		13	22	38		2,49	50	
	16	41068		17	28	42		2,77	50	
	20*	41069		21	32	45	19	3,06	50	