

# LS 2650plus

## Primary Li-SOCl<sub>2</sub> cell

High energy density 3.6 V C-size bobbin cell

Saft's LS 2650plus cell is ideally suited for long-term applications (typically from 5 to 20+ years), featuring low base currents and periodic pulses.

### Benefits

- High capacity and high energy (1175 Wh/l and 637 Wh/kg)
- High voltage response, stable during most of the lifetime of the application
- Wide operating temperature range (-60°C / + 85°C)
- Low self-discharge compatible with long operating life (less than 1% after 1 year of storage at + 20°C)
- Superior resistance to corrosion
- Low magnetic signature

### Key features

- Bobbin construction
- Well controlled passivation
- Hermetic construction with glass-to-metal seal
- Stainless steel can
- Non-flammable electrolyte
- RoHS and REACH compliance
- Made in France

### Designed to meet all major quality, safety and environment standards

- Safety: UL 1642, IEC 60086-4
- ATEX: IEC 60079-11 part 10.5 (T4 temperature rating at + 40°C)
- Transport: UN 3090 and UN 3091
- Quality: ISO 9001, Saft Excellence System, continuous program

### Typical Applications

- Utility Metering
- Internet of Things
- Alarms and security
- Medical devices
- Tracking systems
- Professional electronics



### Electrical characteristics<sup>1</sup>

Nominal capacity (under 4 mA, +20°C, 2.0 V cut-off) <sup>3</sup>	8.5 Ah
Open circuit voltage (at +20°C)	3.67 V
Nominal voltage (under 0.5 mA, + 20°C)	3.6 V
Nominal energy	30.6 Wh
Pulse capability <sup>4</sup>	Up to 300 mA
Maximum recommended continuous current	150 mA

For battery sizing, consult Saft

### Operating conditions

Operating temperature range <sup>5</sup>	-60°C / +85°C (-76°C / +185°F)
Storage temperatures (max recommended) <sup>6</sup>	+30°C (+86°F)

### Physical characteristics<sup>2</sup>

Diameter (max)	26.0 mm (1.02 in)
Height (max)	50.4 mm (1.97 in)
Typical weight	47 g (1.65 oz)
Li metal content	approx. 2.2 g

### Customized cell connections

CN, CNR	Radial tabs
2 PF, 3 PF, 3 PF RP, 4 PF	Radial pins
CNA	Axial leads
GCJ	Connector

Other configurations upon request

<sup>1</sup>Typical values relative to cells stored up to one year at + 30°C max.

<sup>2</sup>Sleeved cell.

<sup>3</sup>Dependent upon current drain, temperature, cut-off and cell orientation.


<sup>4</sup>Under 300 mA / 0.1 second pulses, drained every 2 minutes at + 20°C from undischarged cells during 24 h, with 10 µA base current, yield voltage readings above 3.0 V after initial stabilisation. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions or for high pulse currents. Consult Saft.

<sup>5</sup>Operation above ambient temperature may lead to reduced capacity and lower voltage readings. Consult Saft.

<sup>6</sup>For more severe conditions, consult Saft.

## LS 26500plus

Primary Li-SOCl<sub>2</sub> cell

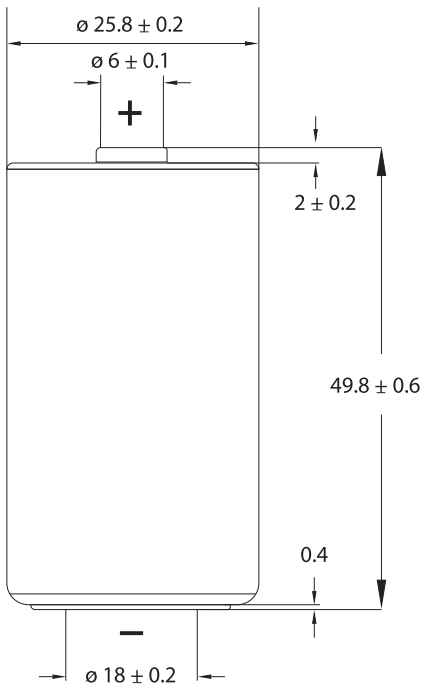




Dimensions in mm

### Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated.

### Warning

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate, or expose contents to water.
- Do not solder directly to the cell (use tabbed cell versions instead).
- Do not remove the cells from their original packing before use.
- Do not store the cells in bulk to avoid accidental short circuiting.
- Do not mix new and used cells or cells from different origins.
- Mind the polarities of the cell.

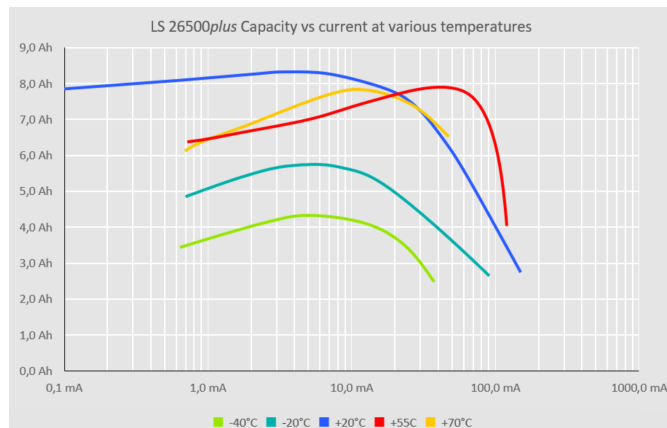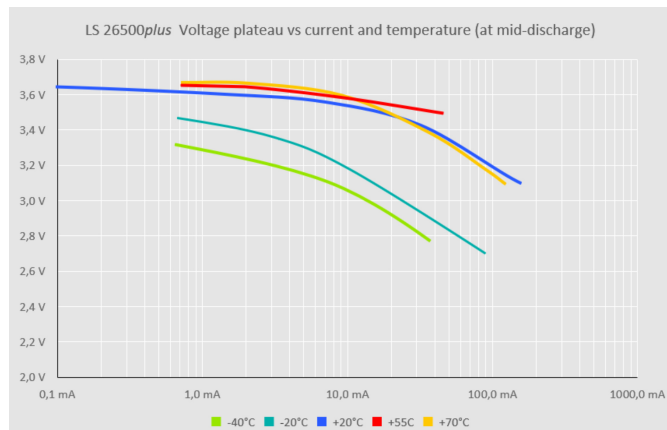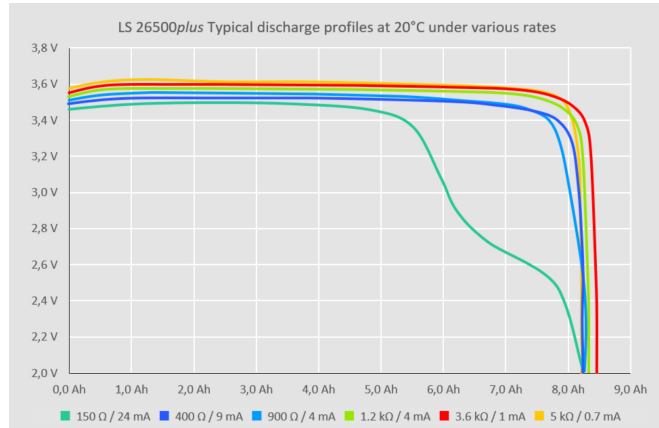

26, quai Charles Pasqua  
92300 Levallois-Perret - France  
[www.saft.com](http://www.saft.com)

**Saft, a subsidiary of TotalEnergies**  
S.A.S. au capital de 26 724 876 €  
R.C.S. Nanterre 481 480 465

Document N° 31029-2-0923

Edition: September 2023

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Photo credits: © Saft