


# LUZ06-T 15.013.40


LUZ | Track-Mounted (1xLED 60W 840/4000K 8220lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

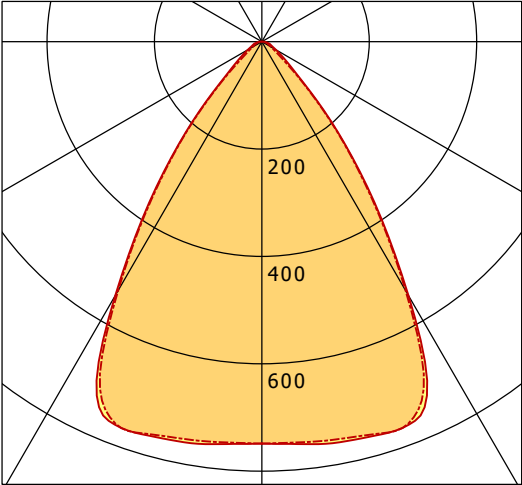

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 749 | 749 | 749  | 749  |
| 15°          | 763 | 759 | 763  | 759  |
| 30°          | 546 | 535 | 546  | 535  |
| 45°          | 114 | 108 | 114  | 108  |
| 60°          | 30  | 20  | 30   | 20   |
| 75°          | 15  | 9   | 15   | 9    |
| 90°          | 4   | 1   | 4    | 1    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

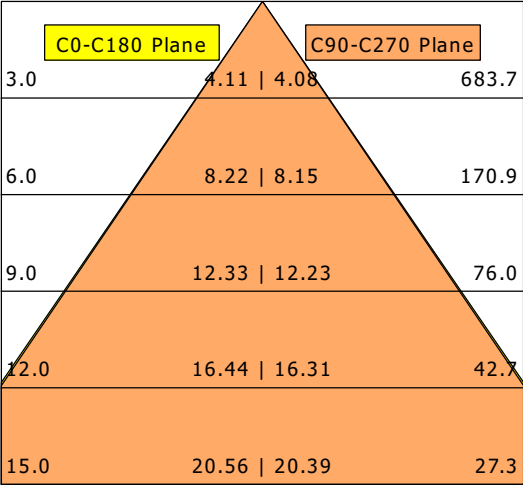

|                    |  |                  |
|--------------------|--|------------------|
| <b>η</b>           |  | LED              |
| Efficiency         |  | 137 lm/W         |
| Direct/Indirect    |  | ↓ 100% / ↑ 0%    |
| System Power       |  | 60 W             |
| <b>UGR</b>         |  | X=4H, Y=8H       |
| Reflection factors |  | 70/50/20         |
| UGR C0/C180        |  | 19.4             |
| UGR C90/C270       |  | 18.8             |
| CIE Flux Codes     |  | 85 96 99 100 100 |
| Ra/CRI             |  | > 80             |